


# Power scheme for pfRICH

Takao for Raymond and Alexander


# Power distribution info requested

- Template provided by Fernando

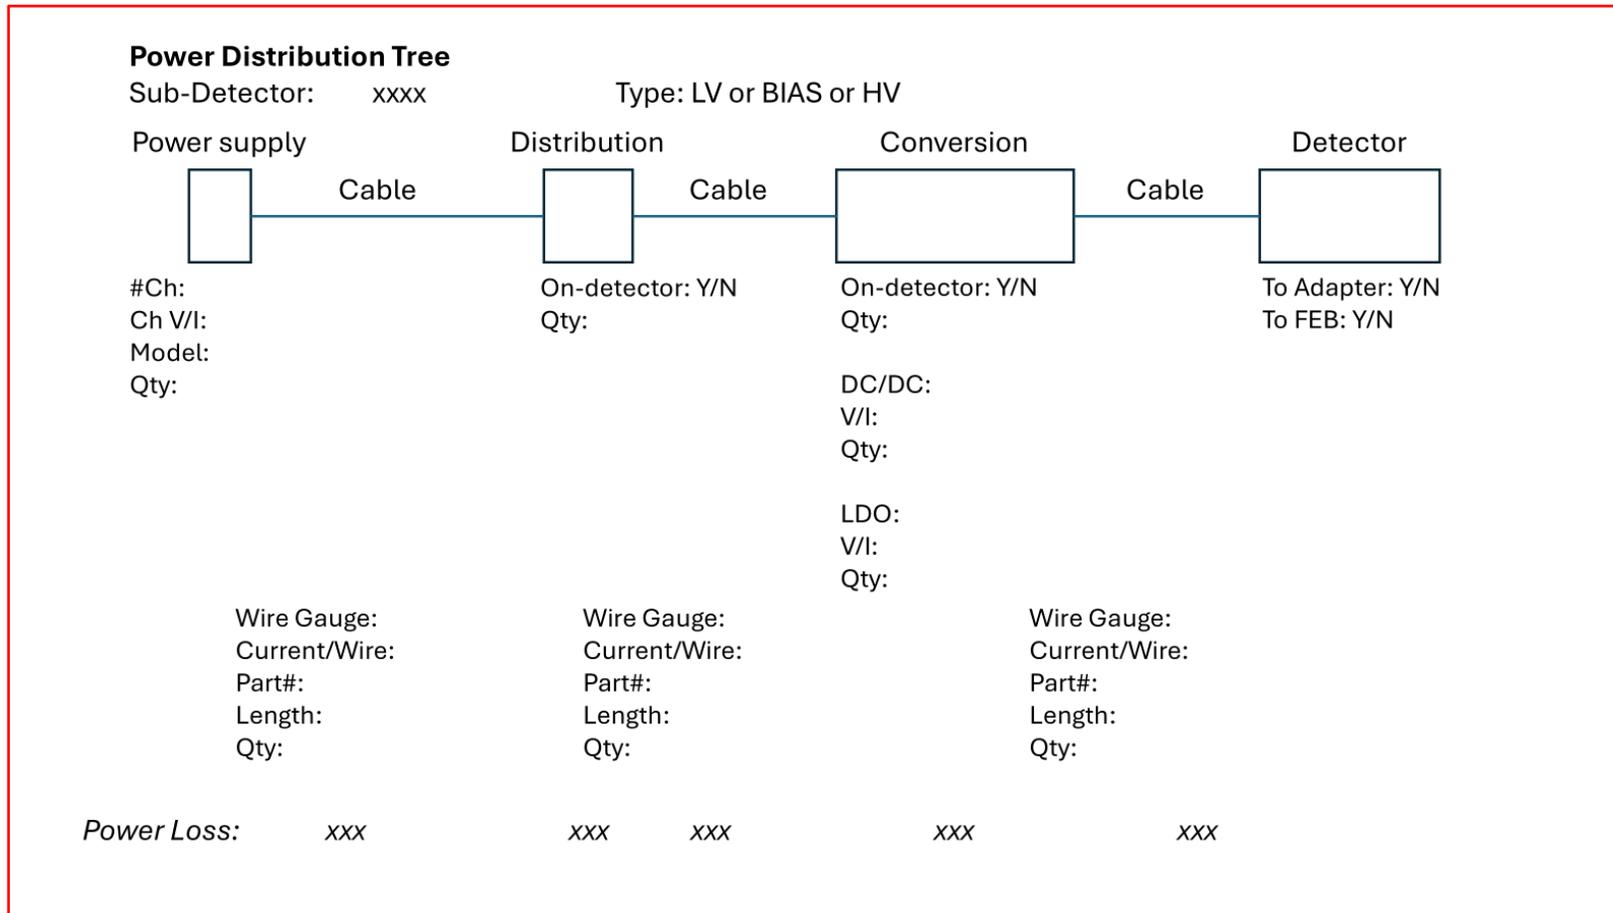

# HV side

- Tim's design on the HV system

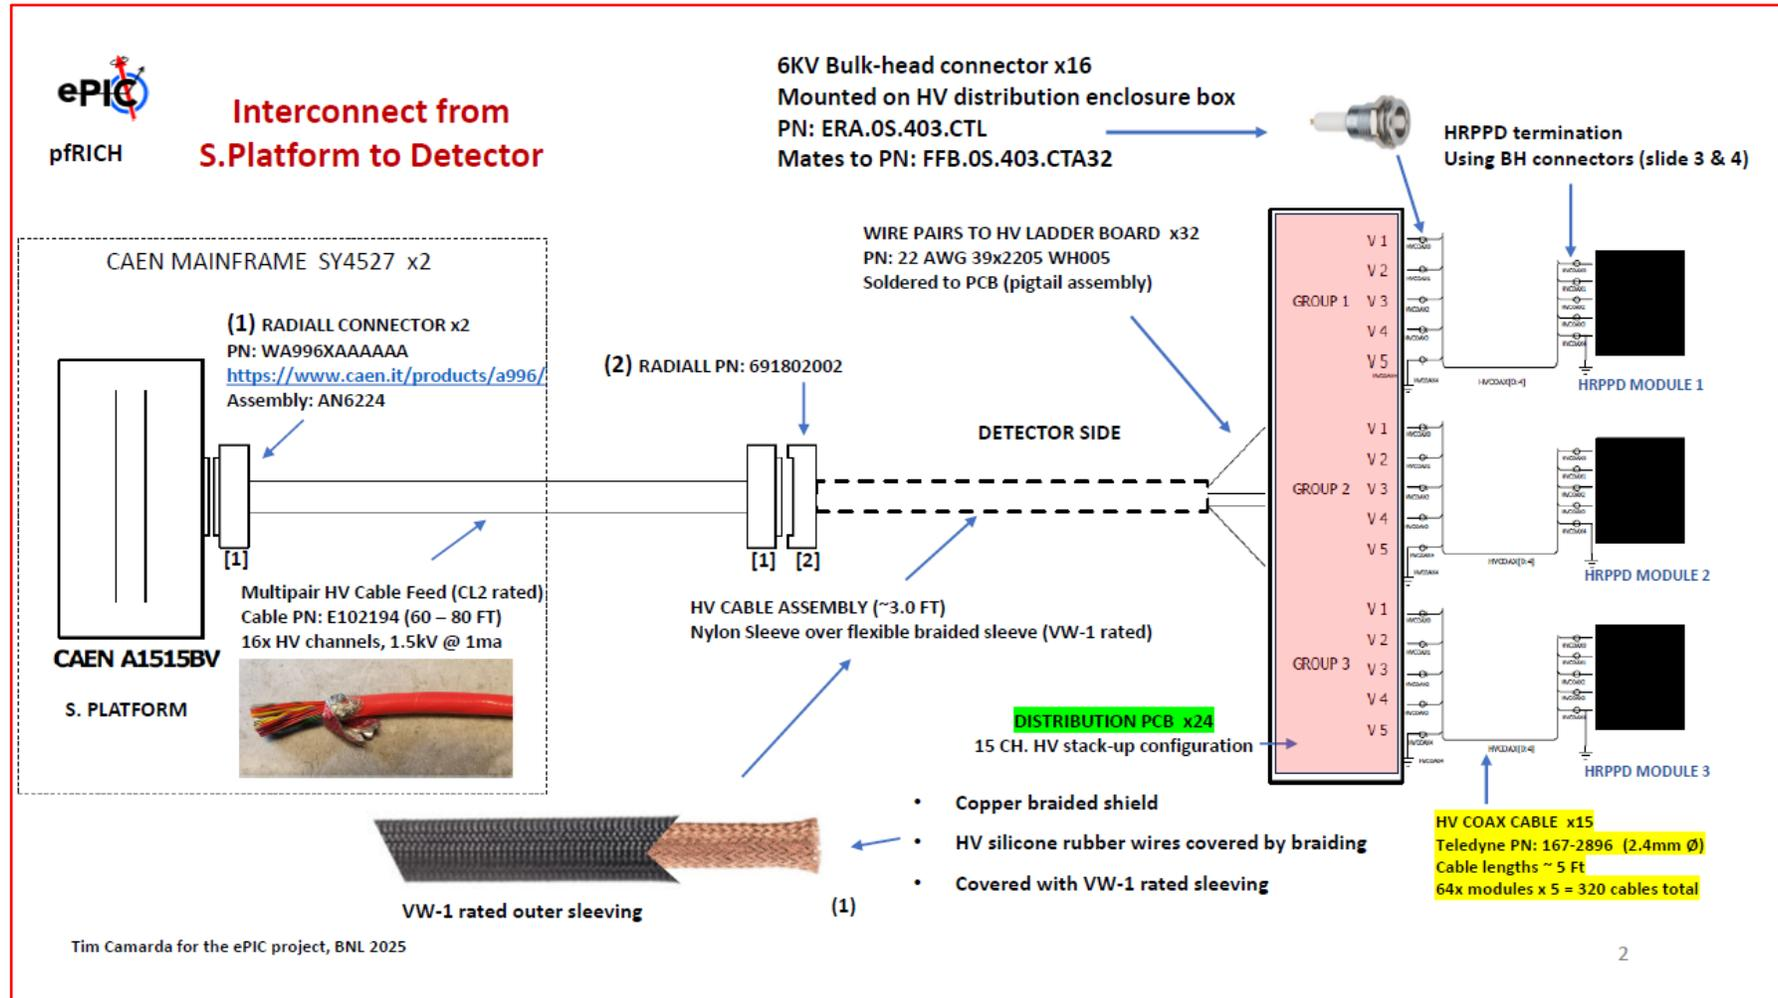

# Power Distribution Tree

Sub-Detector: pfRICH

Type: HV

Power supply

Distribution

Detector



Cable



Cable

Cable



#Ch: 340 (=5\*68)  
 Ch V/I: 0.2mA  
 Model: CAEN A1515BV  
 Qty: 23

On-detector: Y/N  
**Custom board**  
 Qty: 23

To Adapter: Y/N  
 To FEB: Y/N  
**To: Backplane**

- ~200mW per HRPPD module
- ~14W for whole pfRICH

Wire Gauge: 15 pairs of 26  
 Current/Wire: 0.2mA (for two wires, others are zero)  
 Part#: E102194  
 Length: 80 ft  
 Qty: 23

Wire Gauge: 68 \* 5 of 26  
 Current/Wire: 0.1mA (for two wires, others are zero)  
 Part#: 167-2896  
 Length: 5ft  
 Qty: 340

*Power Loss:  $3.6 * 1.0^{-5} W$*

*$2.3 * 1.0^{-6} W$*

xxx

xxx


# Possible readout scheme and LV power-dist

bPOL12 and bPOL2V5 efficiencies are uniformly applied to get total, which is obviously overestimate

- MPV4016I (Wiener PS) : 4ch per module. 0-16V output, 100W/ch max, 10A max.
  - $2.1 \times 8 + 1.6 \times 2 = 23$  W per HRPPD module.
  - Three HRPPD modules can share a PS channel (consistent with HV granularity).
  - Some bPOLs may be replaced with LDOs.
- Current designed FDFC
  - 32ch input, 100fC max
  - ADC: 5 bits, TDC: 5bits, too?
  - 320Mbps data rate (one e-link)
  - elinks can be daisy-chained over chips
- Father board (FB) with a set of lpGBT and VTRX+ that accommodates four FEBS
- Data from FCFD chips would fit lpGBT+VTRX+ bandwidth
  - 4 FEB case (half HRPPD):  $\sim 100\text{MHz (BC)} \times 512 \text{ ch} \times 10\text{bits (ADC+TDC)} \times 1\% = 5.1 \text{ Gbps}$
  - With clock, this may be max for this model
  - Max rate for lpGBT+VTRX+ is 10.2 Gbps.
- Must check items
  - What is max Q? e.g., 2 p.e. &  $5 \times 10^6$  gain? (=1.6pC)
  - Is the occupancy about 1%?
  - ADC/TDC 5bits enough?
  - Readout scheme should be fixed soon

Parts	Per unit	QTY
FCFD	330mW	4
bPOL12	~75% eff	1 per line
bPOL2V5	~86% eff	1 per line
Total	~2.1W	per FEB

Parts	Per unit	QTY
lpGBT	750mW	1
VTRX+	300mW	1
bPOL12, 2V5	~75%, ~86% eff	1 per line
Total	~1.6W	Per FB

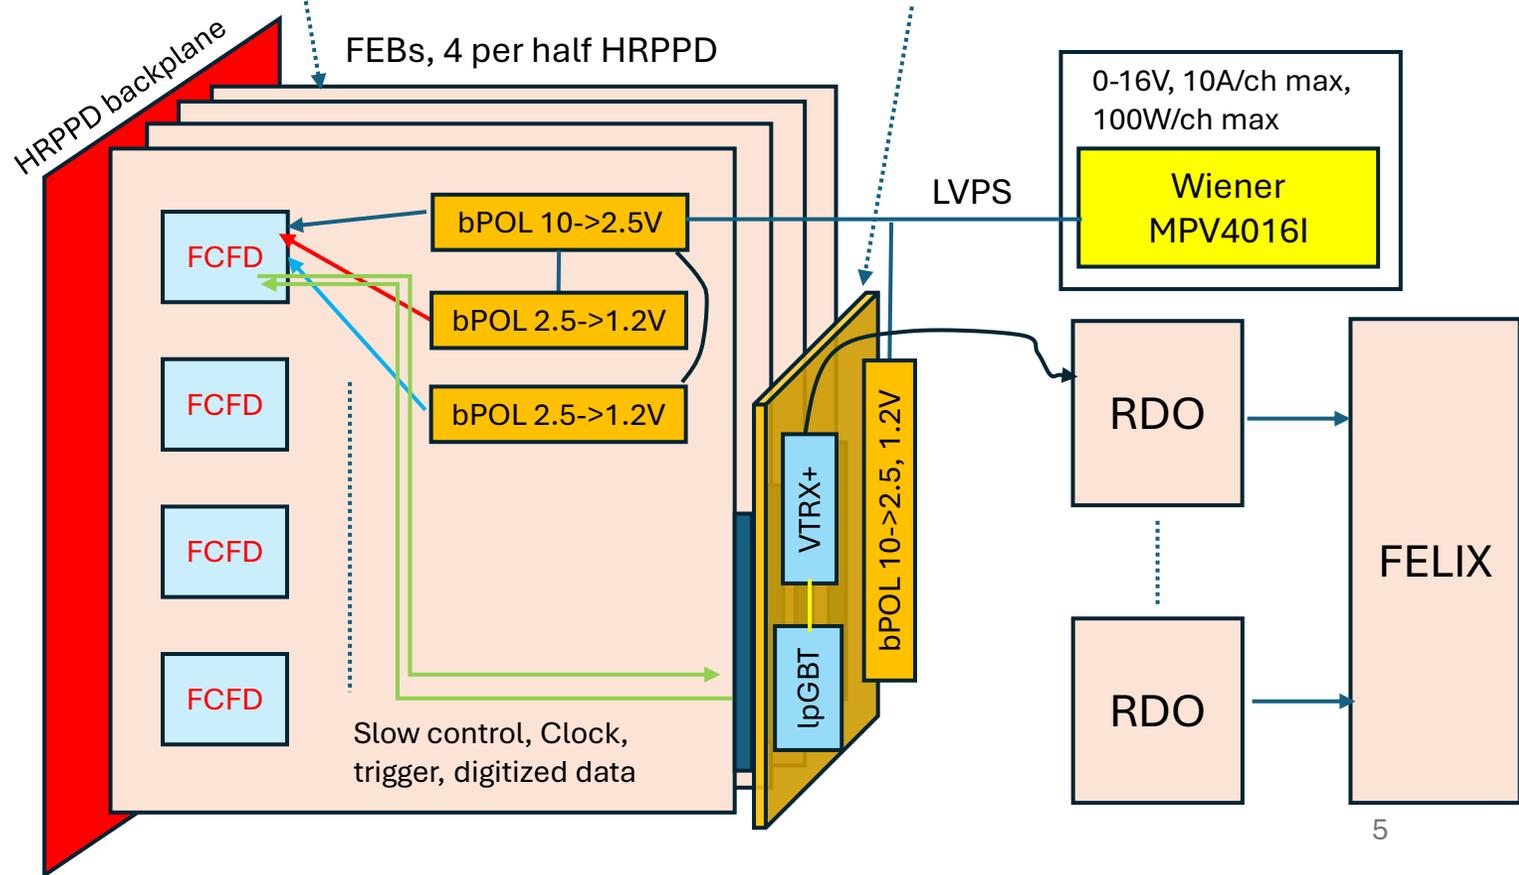

# Power Distribution Tree

Sub-Detector: pfRICH

Type: LV

Power supply


Distribution

Conversion

Detector



Cable



Cable



Cable



#Ch: 4

Ch V/I: 12V/10A

Model: Wiener MPV4016I

Qty: 6

On-detector: Y/N

Qty: 68

12AWG to pigtail

On-detector: Y/N

Qty: same as FEB

DC/DC: bPOL12, 2V5

V/I: 2.5, 1.2

Qty: 1768

LDO: N/A

V/I:

Qty:

To Adapter: Y/N

To FEB: Y/N

**Work in progress**

Wire Gauge: 12AWG?

Current/Wire: 3A

Part#:

Length: 80ft

Qty: 68

Wire Gauge: Pigtail (20AWG?)

Current/Wire: 0.25A?

Part#:

Length: 5ft

Qty: 680

Wire Gauge:

Current/Wire:

Part#:

Length:

Qty:

Power Loss: xxx

xxx

xxx

xxx

xxx

# Backup

# Power Distribution Tree

Sub-Detector:     xxxx

Type: LV or BIAS or HV

Power supply

Distribution

Conversion

Detector



Cable



Cable



Cable



#Ch:  
Ch V/I:  
Model:  
Qty:

On-detector: Y/N  
Qty:

On-detector: Y/N  
Qty:

To Adapter: Y/N  
To FEB: Y/N

DC/DC:  
V/I:  
Qty:

LDO:  
V/I:  
Qty:

Wire Gauge:  
Current/Wire:  
Part#:  
Length:  
Qty:

Wire Gauge:  
Current/Wire:  
Part#:  
Length:  
Qty:

Wire Gauge:  
Current/Wire:  
Part#:  
Length:  
Qty:

Power Loss:     xxx

xxx     xxx


xxx

xxx

# LV power-dist scheme (going to FEBs)

- Slow Control through RDO->VTRX+
- MPV4016I (Wiener PS) : 4ch per module. 0-16V output, 100W/ch max, 10A max.
  - Three HRPPD modules (8\*3 FEBs) share a PS channel? Or, we split per module.
- A FCFD chip with 32ch consumes 330mW (Ana+Dig, max).
- We need 544 VTRX+ modules for pFRICH. Or, we should use SFP+.


Parts	Per unit	QTY
FCFD	330mW	4
lpGBT	750mW	1
VTRX+	300mW	1
bPOL12	~75% eff	1 per line
bPOL2V5	~86% eff	1 per line
Total	~3.7W	per FEB

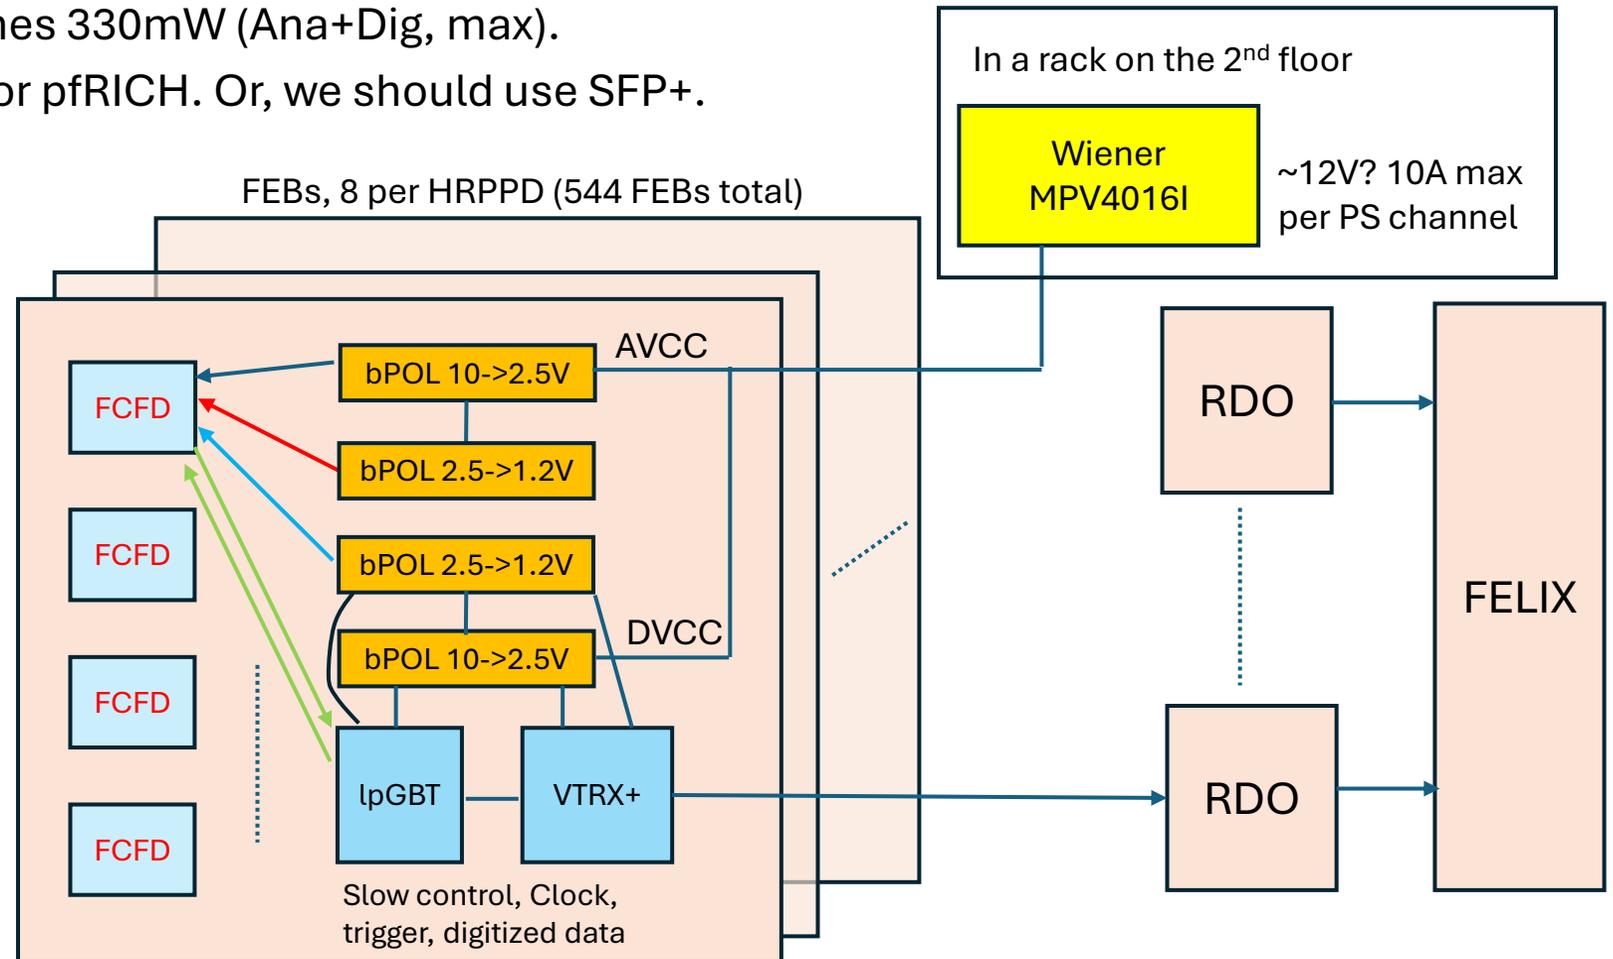

- bPOL12 and bPOL2V5 efficiencies are uniformly applied to get total, which is obviously overestimate
- Separating AVCC and DVCC maybe overkill for FDFC.

# Another option for lpGBT + VTRX+

- We could make a "father board" with one lpGBT+VTRX+ that connects to 4 or 8 FEBs
  - Data from 4 or 8 FEBs can be transferred to the father card without line drivers, etc.
  - This will save power by ~1.6W (max) for each FEB. Maybe one PS channel can drive 4 FEBs.
- It depends on the data rate from the FCFD chips and lpGBT+VTRX+ bandwidth
  - 4 FEB case (half HRPPD):  $\sim 100\text{MHz (BC)} * 512 \text{ ch} * (5\text{bit (ADC)} + 5\text{bit(TDC)}) * 1\% \text{ occupancy} = 5.1 \text{ Gbps}$
  - Max bandwidth for lpGBT+VTRX+ is 10.2 Gbps.

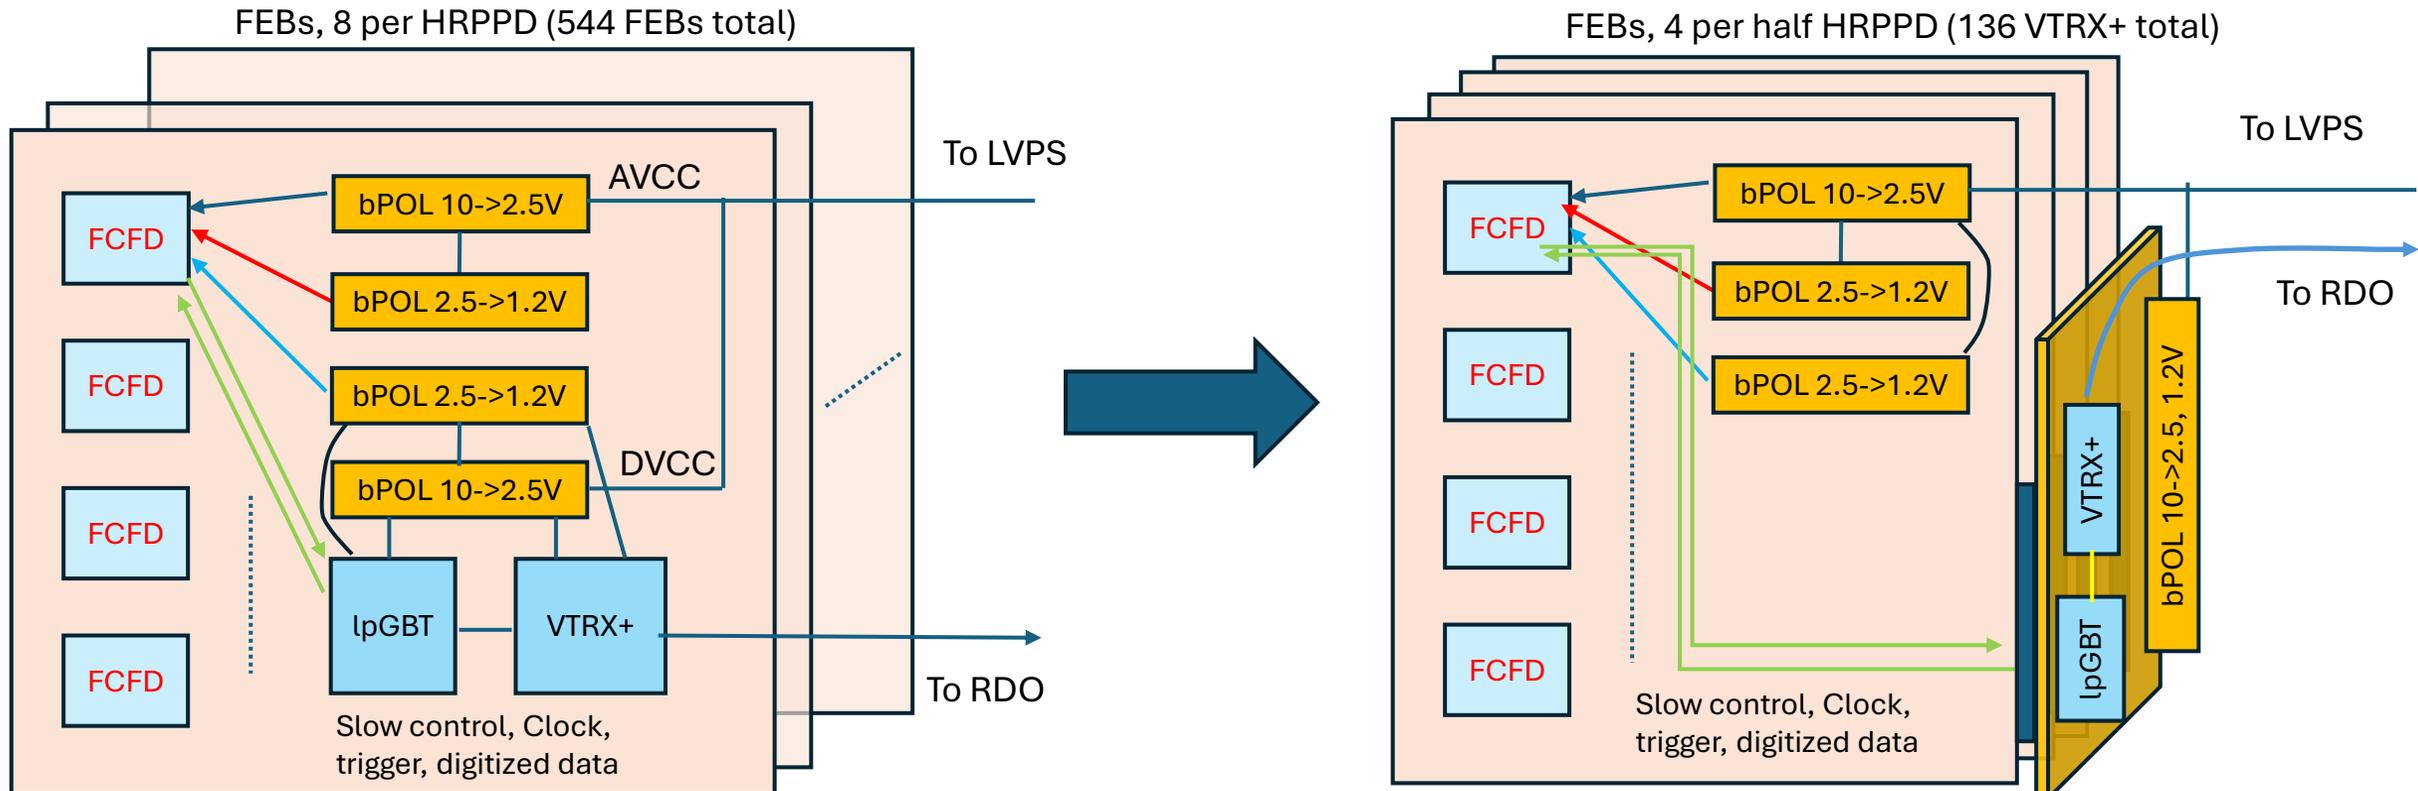

# Power for chips, lpGBT, VTRX+ (LDO cases)

- Individual channel
  - PreAmp+Discr: 3.8mW (1.5mA for 2.5V, 3.2mA for 1.2V) (max)
  - TDC+ADC: 0.2mW → 0.16mA for 1.2V
  - Supporting circuitry: 0.2 mW → 0.16mA for 1.2V
  - Global Circuitry is per-chip basis.
- 32ch chip
  - PreAmp+Dicr: 122mW (49mA for 2.5V, 102mA for 1.2V)
  - TDC+ADC: 6.4mA -> 5.3mA for 1.2V
  - Supporting circuitry: 6.4mW -> 5.3mA for 1.2V
  - Global Circuitry: 160mA for 1.2V
- Current
  - Min-Max I for 1.2V: 171mA - 273mA
  - Min-Max I for 2.5V: 0mA – 49mA (anti-correlate with 1.2V)
- Wattage
  - Min-Max W with single 2.9V power: 0.64W – 0.79W/chip
  - Min-Max W with 2.9V and 1.7V powers: 0.43W - 0.47W/chip
- Other Component
  - lpGBT: 700mW (@10Gbps. 1.2<V<1.32 only → 540mA?)
  - VTRX+: 306mW for 4TX+1RX (max).
- One-card power
  - chip only: 1.9W (two V) - 3.2W (one V)
  - whole: +(0.99W+0.43W, two V), +(1.7W+0.74W, one V)
- Per module power: 27W - 45W
- bPOL spec
  - bPOL 12, max lout is 4A, eff is 75% (10V to 2.5V)
  - bPOL 2.5, max lout is 3A, eff is 86% (2.5V to 1.2V)

## • Target power per channel:

Circuit Component	Power per Channel [mW]	Power per ASIC[mW]
Preamp + Discr (low-high power)	2.1 - 3.8	269 - 486
TDC+ADC	0.2	26
Supporting Circuitry	0.2	26
Global Circuitry		200*
Total (high power)		521 - 738

Assumptions :  
FCFD is 128 channels

\* Based on ETROC, may be an overestimate