

TTL detector performance studies - follow-up -

**Det1 TOF Meeting
July 27, 2022**

Nicolas Schmidt



Performance studies in today's meeting





requested updates:

- Determine discrepancy between Fun4All and ATHENA barrel material budget
- Show lower eta bins for resolutions $-2.5 < \eta < 2.0$, $-0.5 < \eta < 0.5$ and $2.0 < \eta < 2.5$
- Add track reconstruction efficiencies to slides
- Provide Cherenkov position resolution plots as function of θ instead of η
- Add comparisons with 1cm and 3cm strip sensors
- Provide pointing resolution comparisons with material budget variations

- Determine performance for tracks with and without TTL hit information separately ← not yet done, requires more work
- Determine calorimeter resolution impact of 15% X_0 TTL ← not yet done




NEW: ATHENA-style barrel TOF (Fun4All)

- **Material budget** $\sim 1.2\%X/X_0$
 - C-foam (honeycomb) density 0.09(0.03) g/cm³
 - cooling with significant material
- Detector placed at $R \sim 64\text{cm}$
- Detector length $\sim 2.8\text{m} \rightarrow \approx 11\text{m}^2$ of sensors

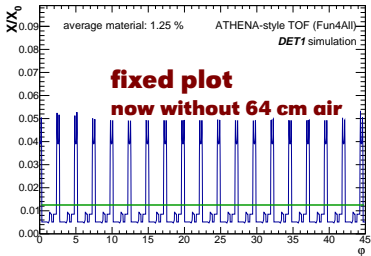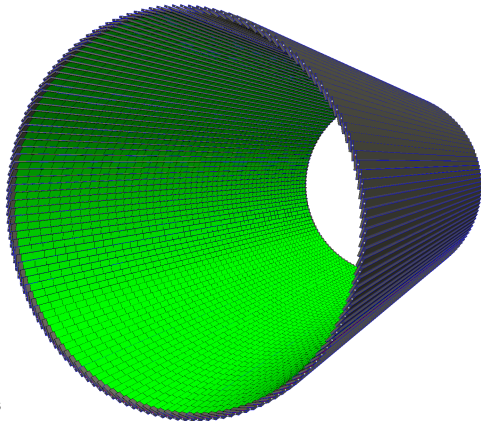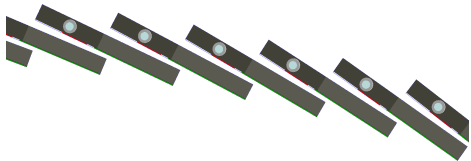


Momentum resolution - Different Detectors

now with lower $|\eta|$ bins!

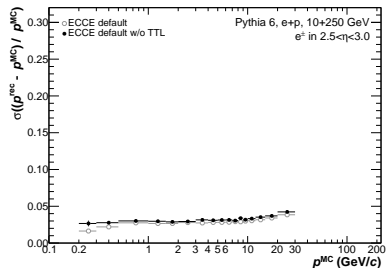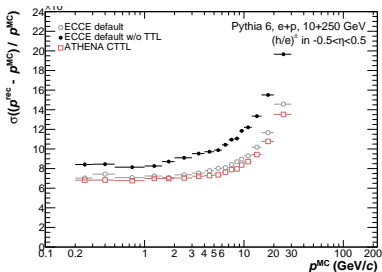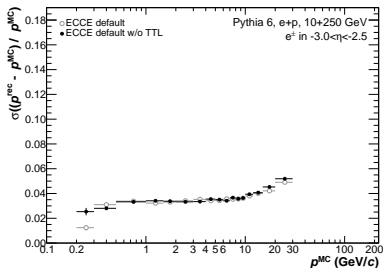

- Comparison between CTTL and ATHENA TOF detector design
 - slight improvement of tracking performance
 - possibly due to all sensors being in front of support material
- Comparison to TTL layers being excluded from Kalman filter
 - important tracking constraints in barrel and forward
 - surprisingly low impact in backward direction




Tracking efficiency - Different Detectors

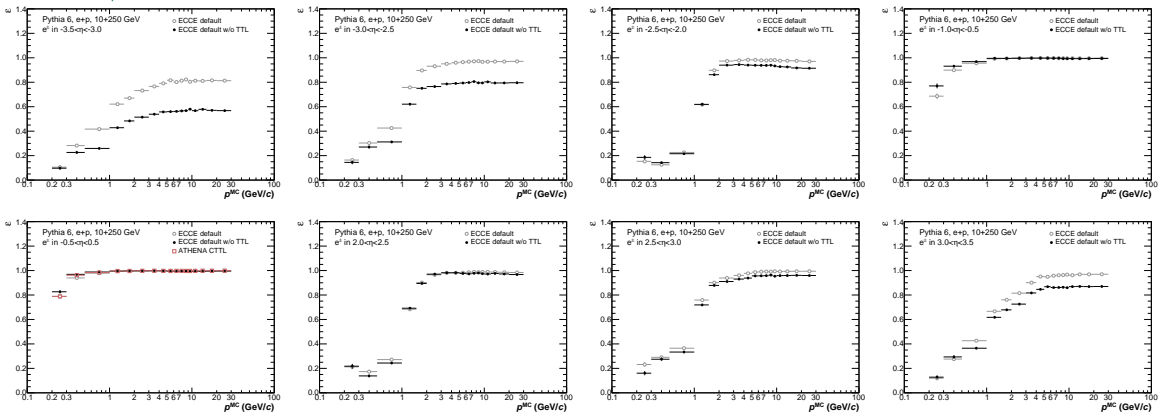

- Clear improvement of tracking efficiency with TTL, especially at high $|\eta|$
- Overall low efficiency for $p < 1\text{GeV}$ in fwd/bwd

Momentum resolution - Different Sensors




now with lower $|\eta|$ bins!

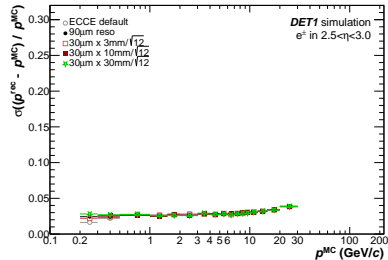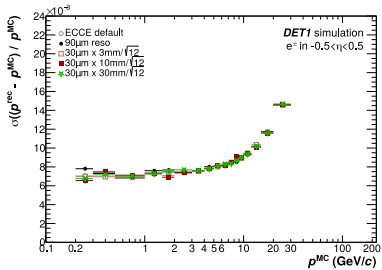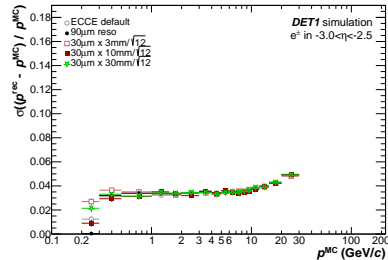

- Studies performed via Kalman filter adjustments
 - Forward/backward sensor resolution changed in φ and R
 - Barrel sensor resolution changed in φ and z
- Momentum resolution appears unaffected by AC-LGAD pitch
 - strip sensors (also with larger pitch in φ) can be used

Momentum resolution - Different Material

now with lower $|\eta|$ bins!

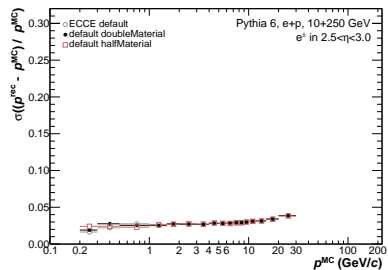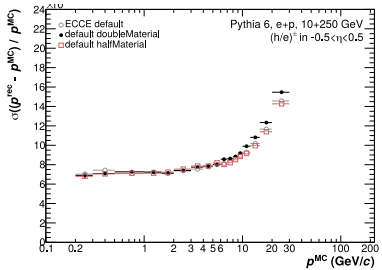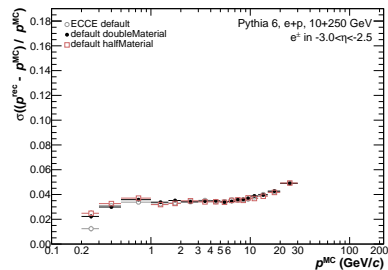


- Material of TTL layer with small/negligible impact on tracking resolution
 → however, ECal performance might depend on low material budget

Conclusions

- Some updates provided...

Backup

Reminder: ECCE-style TTL Layers in Geant4

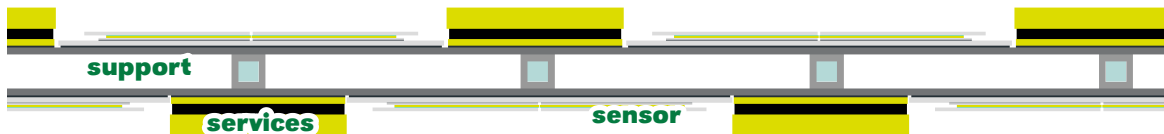

Support:


Layer	material	thickness
Top plate	aluminum	1mm
air gap	air	5mm
bottom plate	aluminum	1mm
cooling	aluminum	5mm diam. tube 1mm wall

Services:

Layer	material	thickness
Thermal pad	graphite	0.25mm
High Speed Board	polystyrene	1mm
Power board	polystyrene	3.1 mm

Sensor:

Layer	material	thickness
Thermal pad	graphite	0.25mm
AIN	AIN	0.79mm
Laird Film	graphite	0.08mm
ROC	plastic	0.25mm
Solder (Tin)	tin	0.03mm
Sensor	silicium	0.3mm
Epoxy	epoxy	0.08mm
AIN	AIN	0.51mm






- Material budget $\sim 8\% X/X_0$ dominated by Al plates
 \rightarrow cooling pipes with substantial material

More infos in CMS ETL TDR [\[\[Link\]\]](#)

Reminder: ECCE-style TTL Layer


- Barrel made of 12 modules in azimuth and multiple modules along z-axis
- Forward layers mounted on both sides of large disk
- AC-LGAD pixel sensors with $500\mu\text{m}$ pitch
→ $30\mu\text{m}$ position resolution

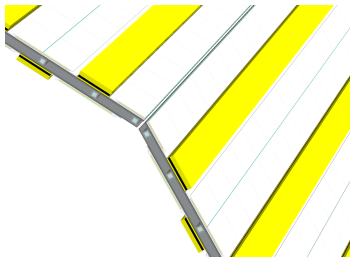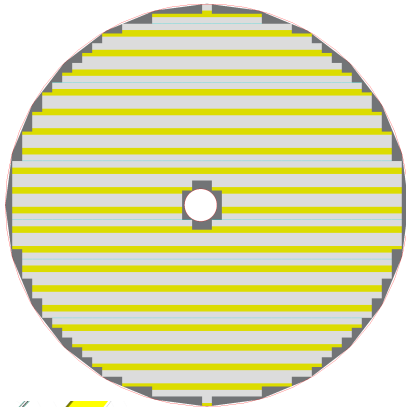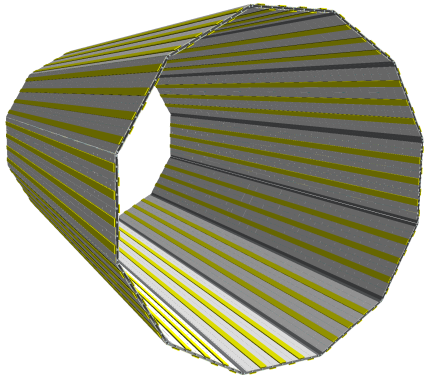

Reminder: ATHENA-style barrel TOF (DD4hep)



ATHENA Barrel TOF Detector Layout

Full azimuthal coverage

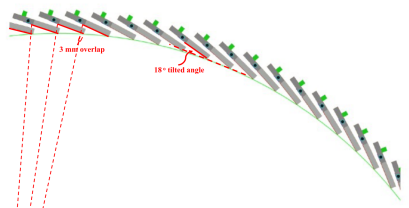


- Material budget $\sim 1\%X/X_0$
- ATHENA design placed at $R \sim 52.5\text{cm}$
- Strip AC-LGAD with $0.5 \times 10\text{mm}$ pitch
- Full coverage in φ , 98% coverage in z


Material Scan (51 cm < rho < 55 cm, -120 cm < z < 120 cm)

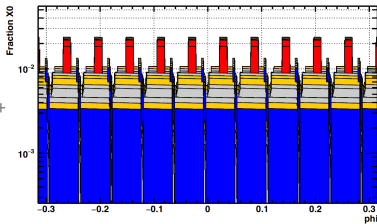

- AC-LGAD sensor
- Frontend ASICs
- Carbon foam+ Carbon honeycomb+ CF skins
- Al cooling tube
- Liquid coolant
- Kapton PCB
- Connector



$l = \frac{1}{2} L = 0.673 \text{ m}$

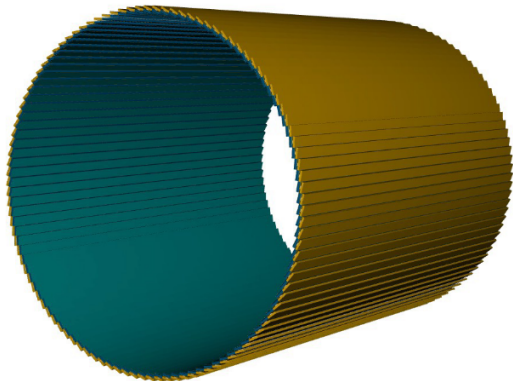

Performance studies in today's meeting

- **spatial resolution of sensors**

- 1) Ideal $30 \times 30 \mu\text{m}$

- 2) Barrel: $30 \mu\text{m}$ along $r^*\text{phi}$, while $3 \text{ mm}/\sqrt{12}$, $1 \text{ cm}/\sqrt{12}$, or $3 \text{ cm}/\sqrt{12}$ in Z

- 3) Endcap: $30 \mu\text{m}$ along phi, while $3 \text{ mm}/\sqrt{12}$, $1 \text{ cm}/\sqrt{12}$, or $3 \text{ cm}/\sqrt{12}$ in R

- **timing resolution of sensors (see presentation by Friederike next week)**

- 1) 25 ps (Default ECCE design)

- 2) variations: 30 ps, 35 ps, 40 ps, 50 ps

- **material budget**

- 1.a) Default ($\sim 7.5\%X_0$ based on ECCE)


- 1.b) $\sim 3.75\%X_0$ (half thickness of ECCE design)

- 1.c) $\sim 15\%X_0$ (twice thickness of ECCE design)

- 2.a) $\sim 1\%X_0$ based on ATHENA design


- 2.b) $\sim 2\%X_0$ (twice of ATHENA design)

ATHENA-style barrel TOF in Det1 (Fun4All)


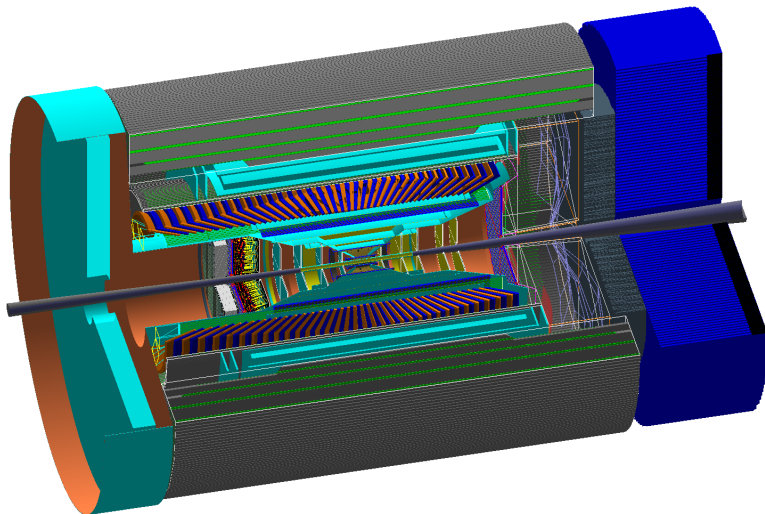


TTL disk design


- 2: Disk 1, Face 1
- 3: Disk 1 Support Plate
- 4: Disk 1, Face 2
- 5: ETL Mounting Bracket
- 6: Disk 2, Face 1
- 7: Disk 2 Support Plate
- 8: Disk 2, Face 2

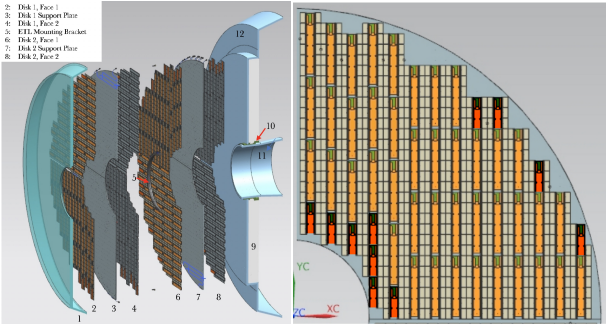



- Design based on the CMS forward upgrade [link]
- Basic elements: ladders of 3 or 6 LGAD sensors with service hybrid (for readout and power)
- Sensors mounted on aluminum plate (currently 6mm thick) and contains cooling
- Sensors on back side of plate shifted to cover service hybrid dead area (see bottom figure)
- Barrel layer to be mounted on inner or outer part of DIRC frame (see next slide)

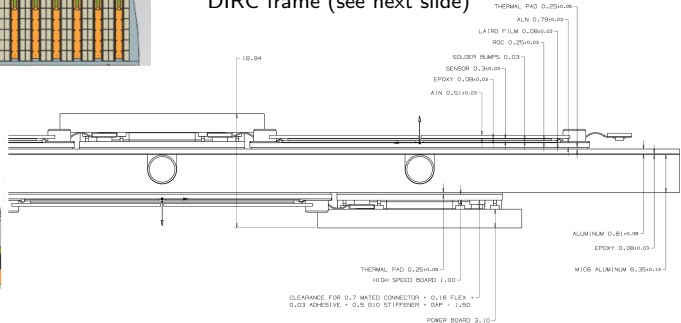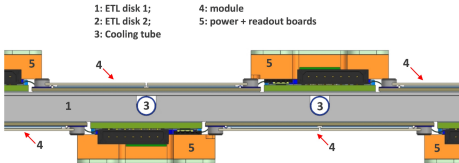


DIRC frame in barrel

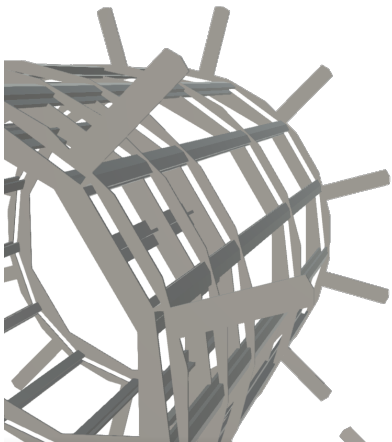



- Currently only stepping files of this frame exist (sent around by Tanja)
→ porting to Fun4All needed
- Frame allows to mount modules on various radial positions
- Considered material is steel at the moment
→ significant material budget in certain regions

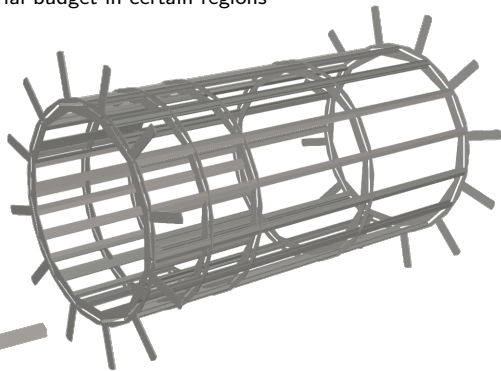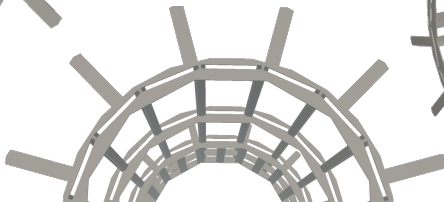


New Layers in Geant4 - 3





Barrel layer outside DIRC



Barrel layer inside DIRC



- Implemented barrel radial positions: 50 cm, 80 cm, 89 cm (other radii possible, but not optimized!)
- Forward layers can be at any z position and with any radius



New TTL layers in default ECCE configuration