

# **LAPPD™ and HRPPD: Upcoming Upgrades to Incom's Fast Photosensors**

**Cole J. Hamel**  
**Sr. Associate Research Scientist**  
**Incom, Inc.**


Melvin J. Aviles, Stephen M. Clarke, Stefan Cwik, Michael R. Foley,  
Alexey V. Lyashenko, Derrick O. Mensah, Michael J. Minot,  
Mark A. Popecki, Shawn Shin, Michael E. Stochaj  
Incom Inc., Charlton, MA, USA

# Five things you need to know about LAPPD / HRPPD

- 1) **The Sensors** - Incom offers both capacitively coupled and direct readout sensor solutions
- 2) **Frugal Price** –At a volume of ~200 units, \$20k / device is achievable (**\$52/cm<sup>2</sup>**)
- 3) **Manufacturing Scale-up** - Incom has the experience and infrastructure to fully support manufacturing scale-up to ensure high quality tile delivery well in time for EIC and other program needs.
- 4) **Technical Specifications** - LAPPD / HRPPD already meet most photosensor requirements
- 5) **Critical Developments** - A Pending SBIR Application will address critical developments for EIC and other physics programs

# The Sensors: Customer Application

- Cherenkov Ring Imaging Board designed at Brookhaven National Laboratory
- Tested with CC LAPPD with 20 and 10 um pores at the Fermi Beamline
  - July 2021
  - June 2022

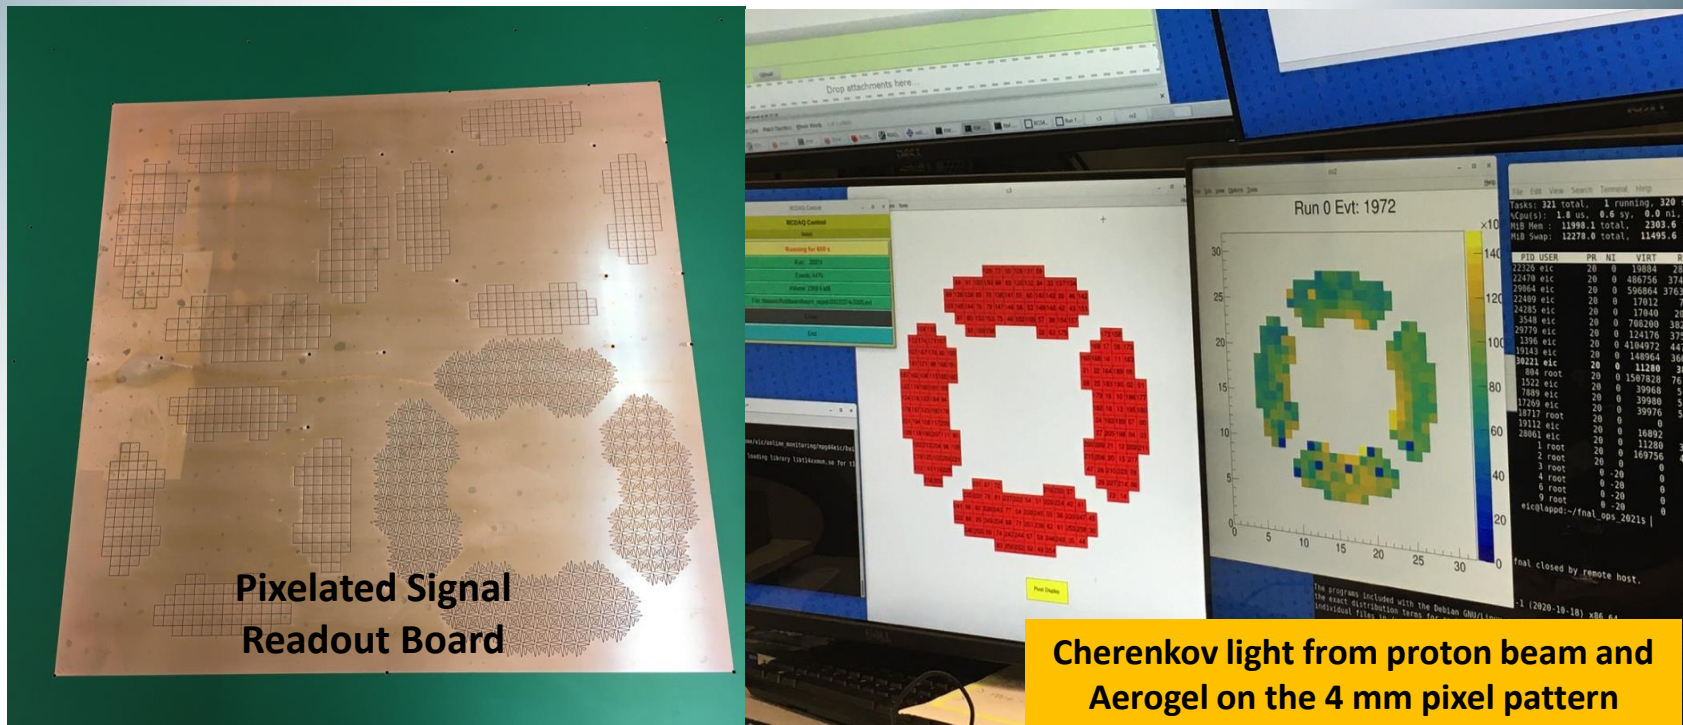

# Frugal Price

## Volume Price Discounts **Available Today!**

TILES ORDERED	TILE COST	LAPPD Cost / cm <sup>2</sup>	CUSTOMER SERVICES	SELLING PRICE	TOTAL SALES
1	\$35,000	\$92.11	\$15,000	\$50,000	\$ 50,000
3	\$28,440	\$74.84	\$15,000	\$43,440	\$ 130,319
5	\$25,111	\$66.08	\$15,000	\$40,111	\$ 200,557
7	\$23,284	\$61.27	\$15,000	\$38,284	\$ 267,988
10	\$21,540	\$56.68	\$15,000	\$36,540	\$ 365,398

**Full manufacturing (Order for ~200 units) →**

- **\$30,000 to \$20,000**
- **\$78/cm<sup>2</sup> to \$52/cm<sup>2</sup> for LAPPD**

**High-volume manufacture (Funded Scale-up)→**

- **\$10,000 should be achievable**
- **\$26/cm<sup>2</sup> (M. J. Minot)**

# Frugal Price:

## Engineering & Special Customer Services:

### CUSTOMER SERVICES COSTS WILL BE DROPPED WHEN FULL PRODUCTION COMMENCES

1. **Technical Support** - Incom provides broad technical support to customers before and after they procure an LAPPD.
2. **Measurement & Test Workshops** - early adopters gain hands on experience operating and collecting data with LAPPD. This service is now offered both live and remotely with a virtual workshop and recorded videos.
3. **Measurement & Test Reports** – Full, comprehensive MCP and LAPPD / HRPPD test reports are prepared for each LAPPD / HRPPD and made available to the customer.
4. **SWAPS** - Incom offers to “swap” an early prototype, during the first year, with a later stage product that might be more suitable for their application. SWAPS are made at either full or partial value, depending on how the detector was maintained. Shipping costs apply.
5. **Proprietary Certificate** – To satisfy certain government agencies, universities or commercial firms that require competitive bids from other suppliers, Incom will provide a “proprietary certificate” indicating that LAPPD / HRPPD are novel, unique products not presently available from any other supplier in the world.
6. **Administrative Documentation, US Export Authorities** - customers are required to provide Incom with an End Use Statement, before product can be shipped. Incom will confirm the eligibility of all prospective customer to receive LAPPD or HRPPD.
7. **Administrative Documentation, Customer Import Authorities** - Incom will coordinate with the Massachusetts Export Center to provide guidance to prospective customers.



# Frugal Price = Manufacturing Scale-up

## Incom, Inc. can readily scale up to high-volume

- 51 Years in business, Founded 1971
- ~200 employees
- Yearly Sales of \$30 MM
- Three facilities:
  - Incom West – Vancouver, WA
  - Incom East (2) – Charlton, MA
    - **LAPPD Pilot Production** by Detector Business Unit (DBU)
- Incom is a major supplier of glass products for the medical diagnostic market and numerous others
- Bottom line: **we've done scale-up before, and we can do it for the LAPPD**




Detector Pilot Production Facility

# Technical Specifications:

## LAPPD vs SiPMs for EIC Lepton Endcap

- Detection area
  - m-RICH  $\sim 1 \text{ m}^2$
  - pf-RICH  $\sim 1 \text{ m}^2$
- LAPPD is 20 cm x 20 cm (plus some outside edge)
  - With 6 mm CC pixels  $\rightarrow 1024$  channels / LAPPD
    - Ways to minimize this
  - 25 LAPPDs for mRICH or pf-RICH:
    - @ $\sim \$20\text{k} = \$0.5$  Million
    - @ $\sim \$10\text{k} = \$0.25$  Million
  - Dark rates  $< 2 \text{ kHz/cm}^2$  at room temperature
- SiPM is (26 mm x 26 mm)
  - 3mm pixels  $\rightarrow 64$  Channels / SiPM
  - Need  $\sim 1500$  SiPM arrays for  $1 \text{ m}^2$
  - Price:  $\$0.5$  Million /  $\text{m}^2$
  - Need to be cooled to  $-25 \text{ C}$

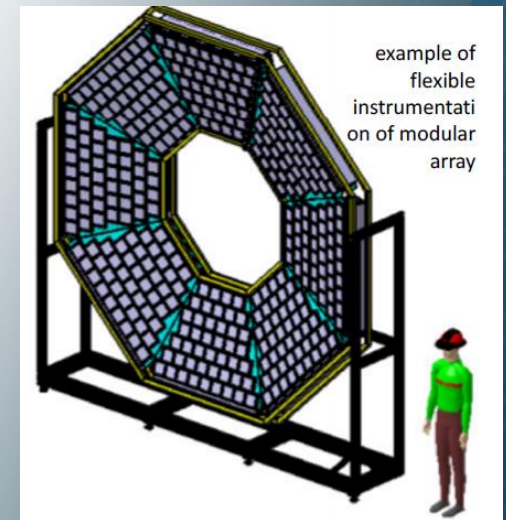


Source: Backward Cherenkov based PID for EIC Detector 1, meeting 6/13/22

# Critical Developments: Currently Underway

## *Ongoing Developments*

- 10  $\mu\text{m}$  pores for LAPPD- better TTS, faster pore recharge time, better B-field performance
- Ceramic Body- better durability, stronger capacitively coupled signal due to thinner anode plate and higher dielectric constant than glass
- B-field tolerance: Tests up to 1.4 T have been performed at ANL
  - 10  $\mu\text{m}$  and 20  $\mu\text{m}$  pores with Direct readout LAPPDs
  - Expand these tests for:
    - Capacitive Coupled LAPPDs
    - HRPPDs

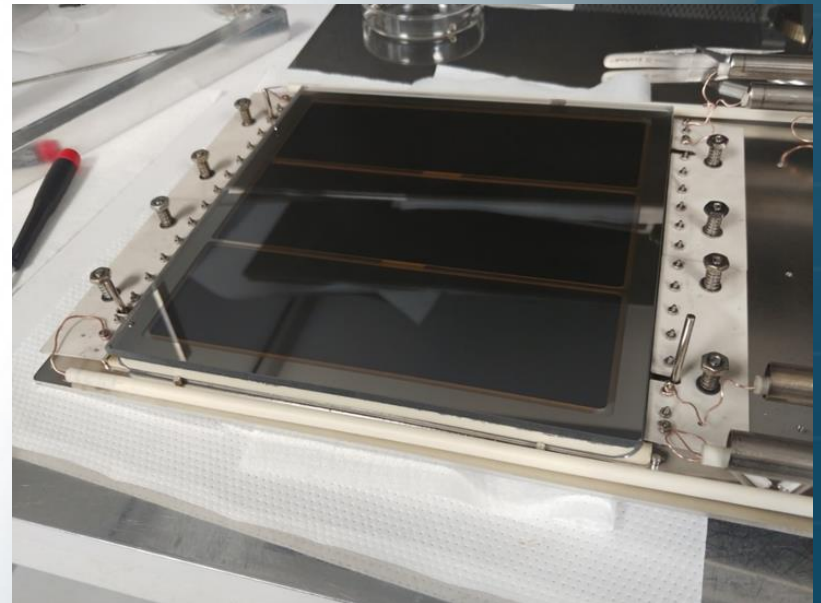






# Technical Specifications:

## Gain vs. Magnetic Field Strength, B || P/C e-

- Testing at Argonne
- LAPPDs pushed toward solenoid increasing B-field in steps
- Gain decreased with increasing magnetic field.
- Gain recovered with a higher MCP voltage.
- Dark rates decreased even in the 0.02 T field
  - (200 Gauss, 400x Earth's field)

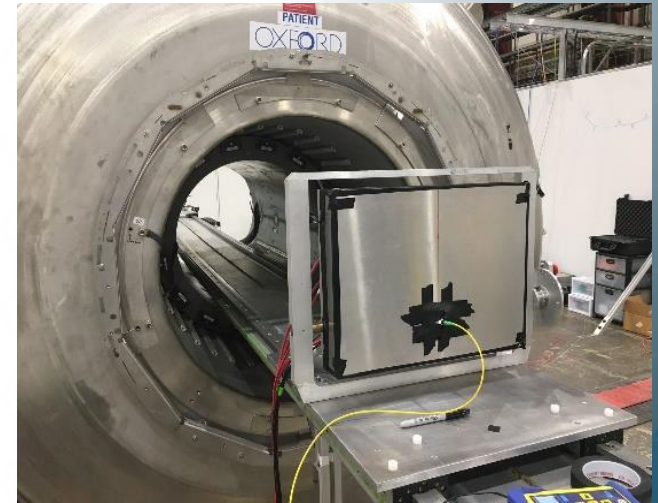


B

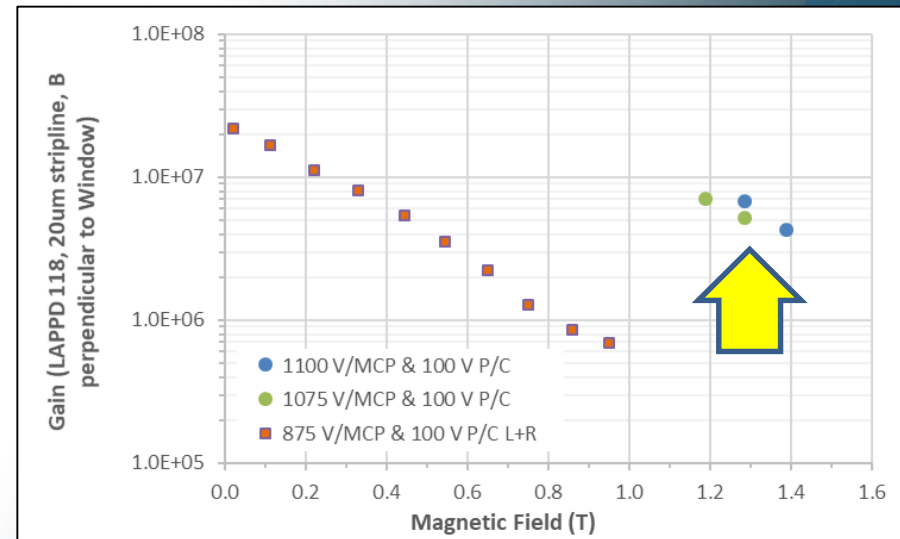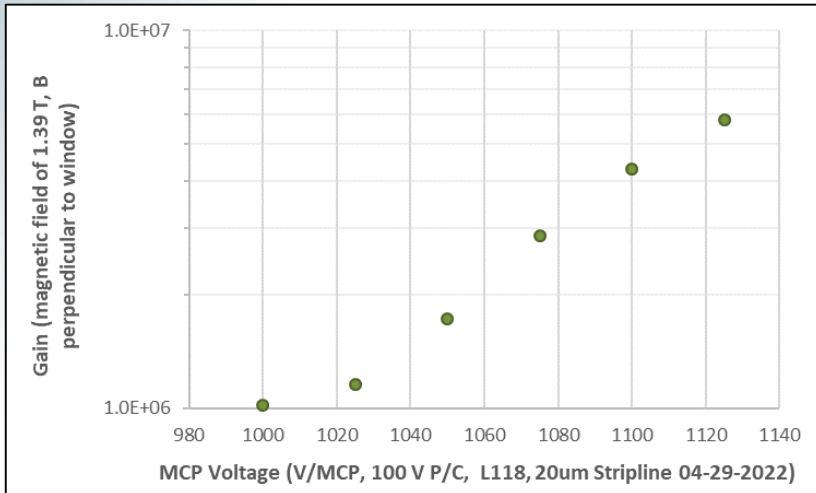

# Technical Specifications:

## Gain vs. Rotation Angle: LAPPD 118

- Gain decreases as the LAPPD is rotated, and the B field is no longer parallel to photoelectron motion.
- Electron landing zone on the anode **moves** with relative B angle

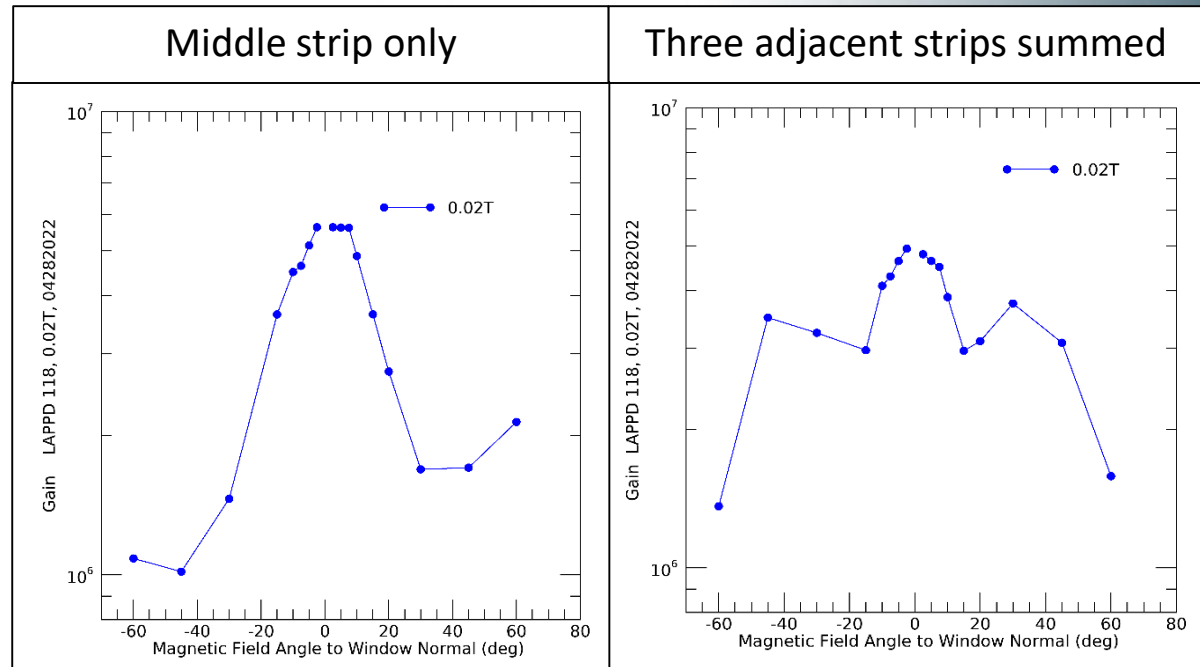


# Critical Developments: Pending SBIR Funding

## *Incom's SBIR Proposal: Sensors Optimized for EIC Cherenkov*


- 1) Red-shift photocathode QE
  - Comparable PDE to SiPMs at 450 nm
- 2) Life Testing
  - UV- PC  $\rightarrow$  5 C/cm<sup>2</sup> demonstrated @ UTA - validate & expand results
  - Radiation- 1E16 protons  $\rightarrow$  ~20% drop in gain (Vincenzo Vagnoni, INFN)
- 3) Electronic Readout
  - Electronics to read out 1024 channels or more
  - Evaluate NALU Scientific **DSA E10-96** readout with **96** channels- use 11 of these
- 4) Form Factor
  - Increase Active Area and Decrease Footprint for closer tiling

# Critical Developments: Cherenkov Spectrum with Aerogel


LAPPD QE

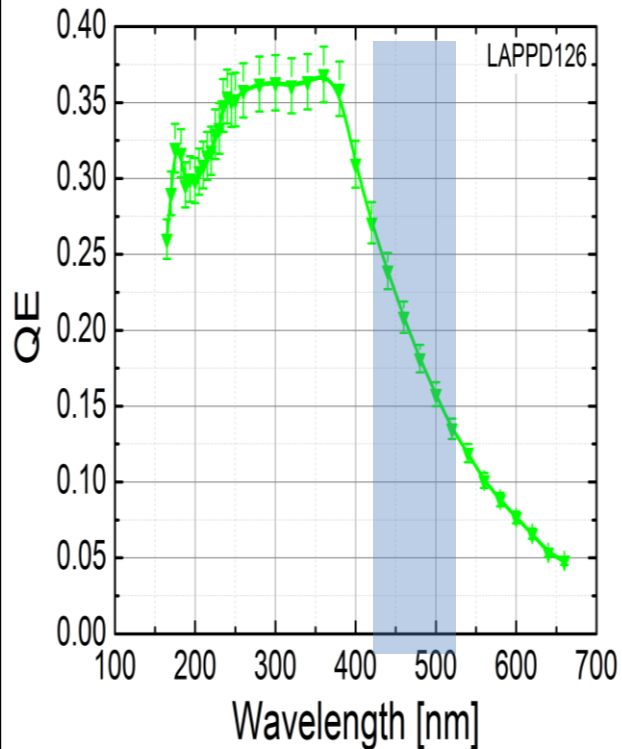

Cherenkov Spectrum  
with Aerogel

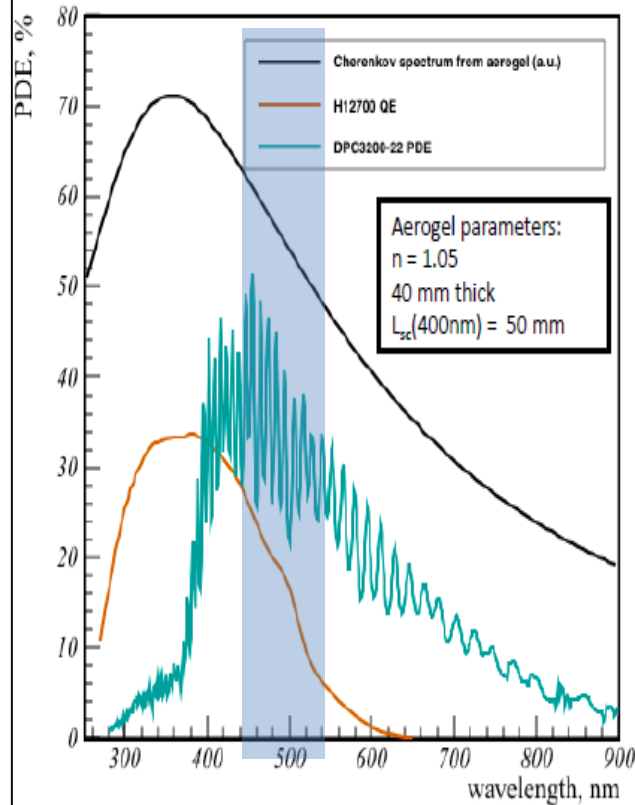

SiPM PDE

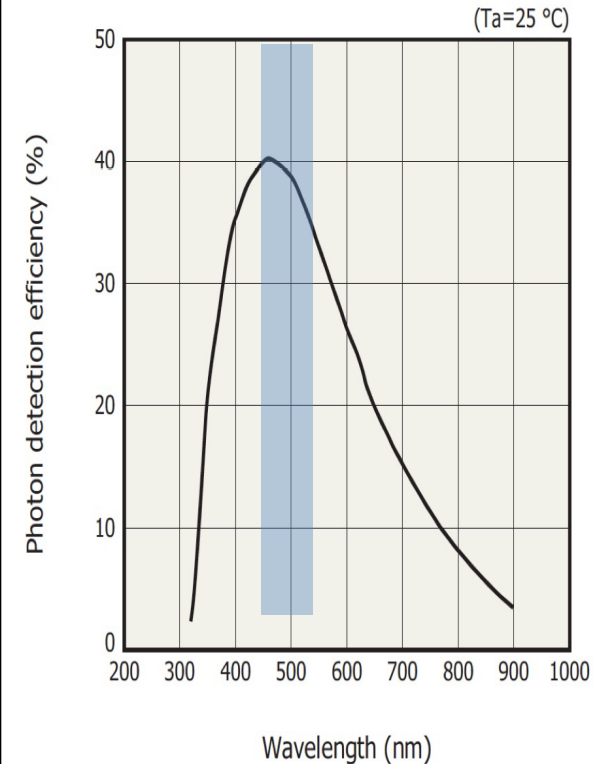




According to PANDA Forward  
RICH Detector

# Critical Developments - Electronics

## Short-Term Electronic Readout Model

(Ref. A. Kiselev @ BNL/EIC)

Reads out 256 channels - 1/4 of the HRPPD!

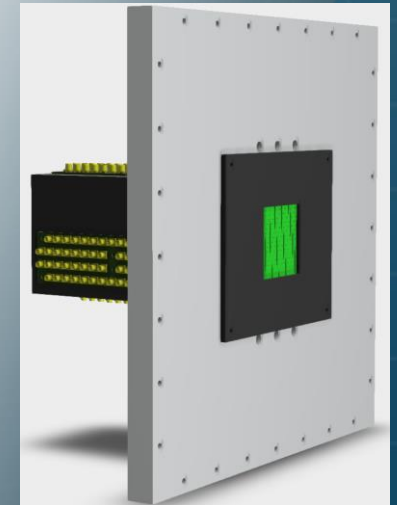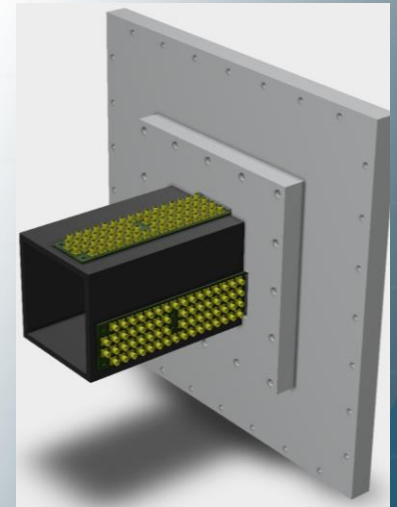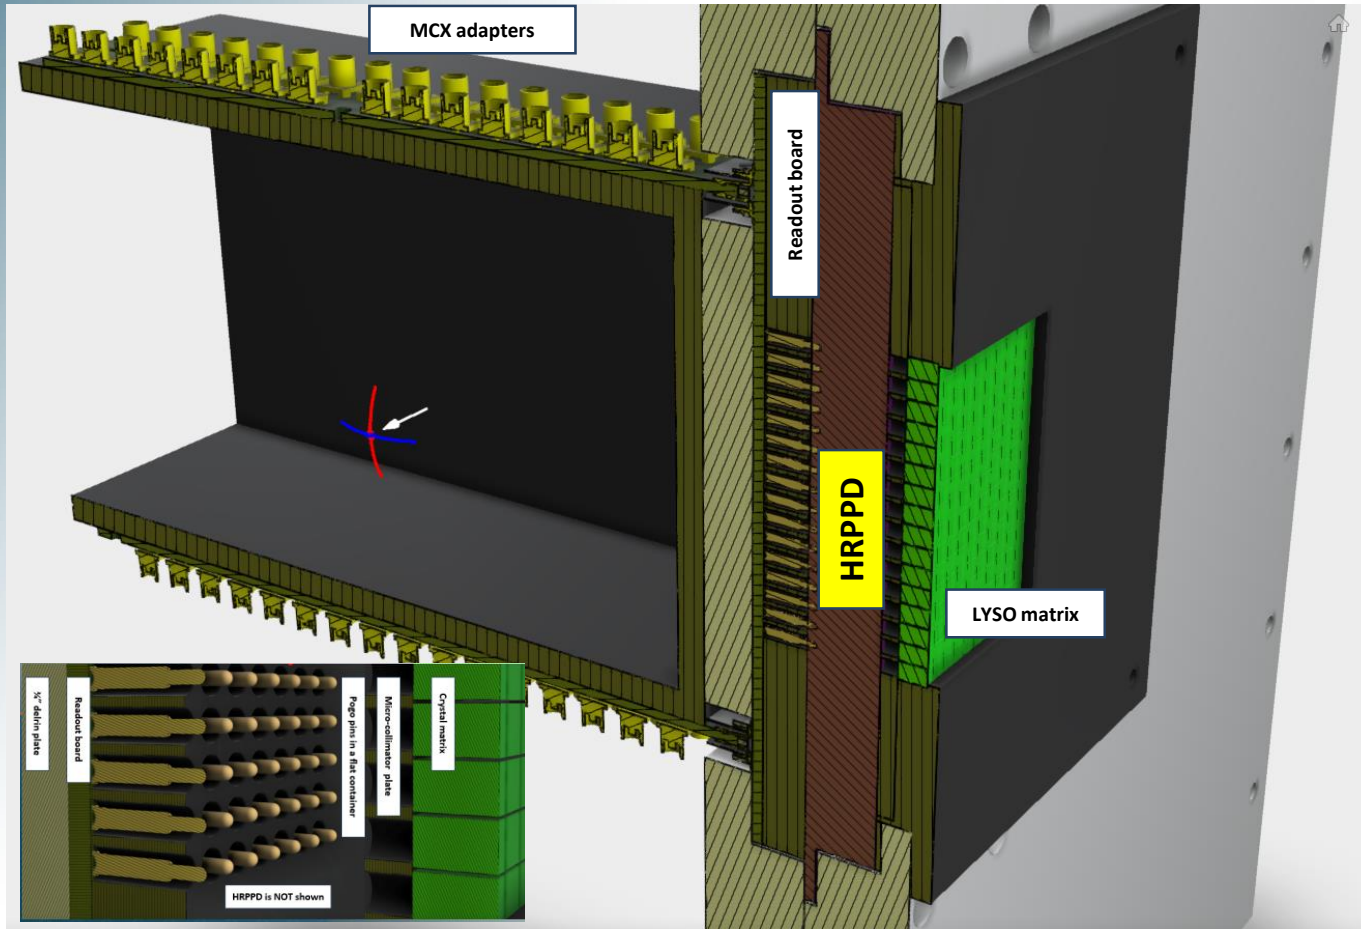



# Critical Developments - Electronics


## Nalu Scientific

### Product Description DSA E10-96



- Product Name: DSA E10-96
- Product Description: 96 channel, 10 GSa/s digitizer
- Dimensions: ~ 12" x 4" x 1"
- Bandwidth: ~1.2 GHz
- Digitizer Chip: UDC V1
- GUI provides real time visualization
- CSV/ binary export
- **In the upcoming SBIR:**
- Incom will rent from Nalu:
- custom PCB: readout whole LAPPD
- 64x 25 mm pixels



96 ch UFL breakout

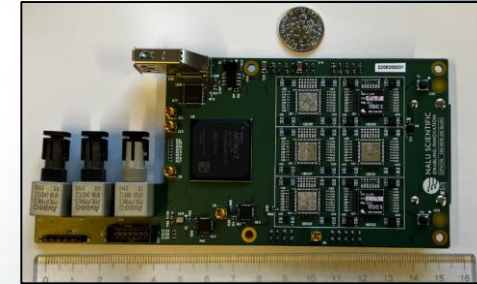

PCB

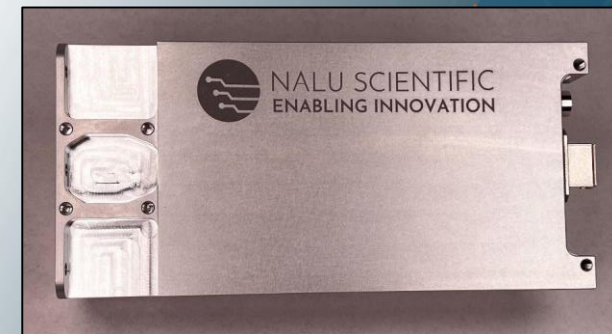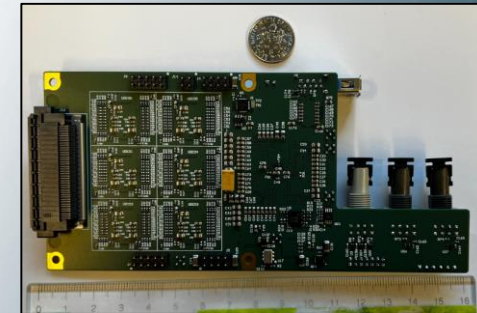

Enclosure

Photos Courtesy of NALU Scientific

LAPPD Workshop II - October 26, 2022

# 5 Takeaways

- 1) The Sensors - DC HRPPD for DIRC, CC LAPPD/ HRPPD for RICH, **available today for rental or purchase**
- 2) Frugal Price - Cost per unit area is competitive with existing technologies
- 3) Manufacturing Scale-up - If a program needs hundreds of devices, Incom can deliver hundreds of devices
- 4) Technical Specifications - LAPPD / HRPPD already meet most EIC and other physics program requirements
- 5) Critical Developments – With support of a pending SBIR program, Incom will develop critical LAPPD / HRPPD improvements for optimal, customized EIC performance, which should also benefit other physics programs.

# Thank You For Listening!


Cole Hamel

*chamel@incomusa.com*

# Back Up Slides

# The Sensors: HRPPD - High Rate/Resolution Picosecond Photodetector Direct or Capacitively Coupled Readout


- **10 cm x 10 cm MCP-PMT**
  - Single photon sensitivity
  - Chevron pair of ALD-functionalized MCPs (**10  $\mu\text{m}$** )
  - Glass/Ceramic package
  - Capacitive (CC) or Direct (DC) Coupling
  - **100  $\text{cm}^2$  active area (only spacers on edges)**
- **High Gain ( $\sim 10^7$ )**
- **Bialkali Antimonide Photocathode**
  - Sodium-Potassium-Antimony  $\text{Na}_2\text{KSb}$
  - **>30% QE** at 365 nm
  - **>95%** spatial uniformity
- **Timing Resolution**
  - SPE:  **$\sim 23$  ps** (Vagnoni, INFN for 10  $\mu\text{m}$  pores)
- **Position Resolution**
  - **< 0.6 (mm)** (dependent on readout board)
  - DC version has 1024 2.5 x 2.5 mm pixels

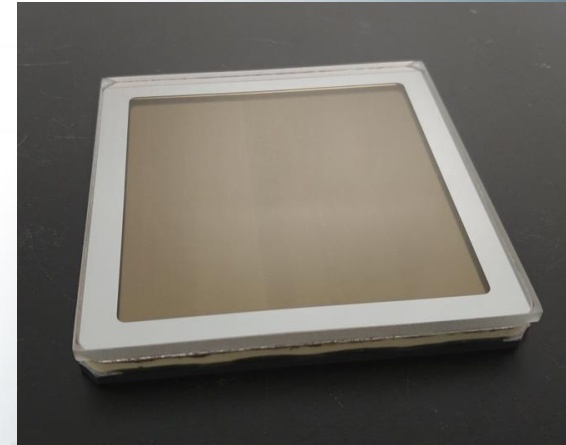



# Manufacturing Scale-up: Economies of Scale

- EIC requires ~200 units of HRPPD/ LAPPD
  - The price per unit drops down between \$20k-\$30k each
  - Now the LAPPD and HRPPD are easier to integrate, provide better performance, **and** are cheaper than SiPMs and Planacon
  - In very high volume, a unit price of \$10,000, or \$26/cm<sup>2</sup> is achievable

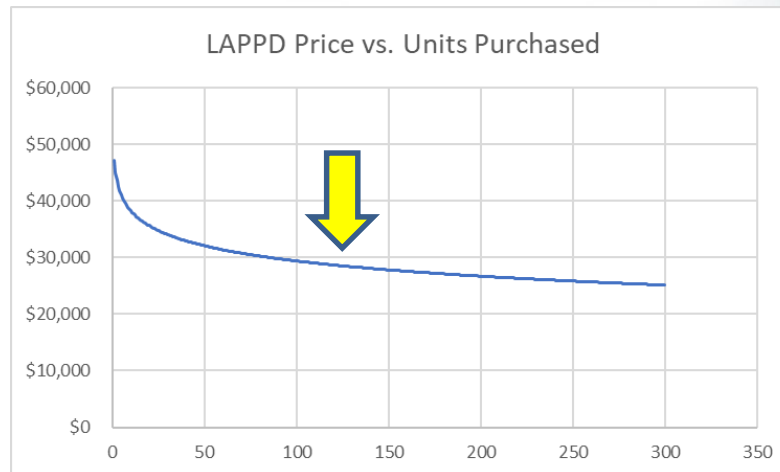

LAPPD Workshop II– October 26, 2022

# Technical Specifications: LAPPD / HRPPD Requirements for EIC PID Detectors

Parameter	DIRC	mRICH	pf-RICH	dRICH	LAPPD / HRPPD
Gain	>1E6	>1E6	>1E6	>1E6	1.00E+07
SPE Timing Resolution	<100 ps	<800 ps	<100 ps	<800 ps	<50 ps
MPE Timing Resolution					8 ps
Pixel Size	3 mm	6 mm	6 mm	6 mm	Any / 2.5 mm X 1024
Spatial Resolution					<1 mm
Dark Noise	≤1 kHz/cm <sup>2</sup>	≤5 MHz/cm <sup>2</sup>	≤5 MHz/cm <sup>2</sup>	≤5 MHz/cm <sup>2</sup>	≤2 kHz/cm <sup>2</sup>
Radiation hardness	Yes	Yes	Yes	Yes	>1E15 15 MeV protons
Single-Photon readout	Yes	Yes	Yes	Yes	Yes
Magnetic Field Tolerance	<2.0 T	1.7-2.0 T	1.7-2.0 T	1.7-2.0 T	1.4 T demonstrated
@ Degrees from Normal		±20 deg	±10 deg	Wide variations	TBD
PC QE @365 nm					30%
PC QE @450 nm					>20%
PDE @450 nm	≥20%	≥20%	≥20%	≥20%	TBD (≥20% = 70% OAR X 30% QE)
Demonstrated Tile Life	5 C/cm <sup>2</sup>				TBD (> 5 C/cm <sup>2</sup> )

# Summary

## *Features*

- HRPPD- $\rightarrow$ 10  $\mu\text{m}$  MCPs , 100  $\text{cm}^2$  (100% active area)
- LAPPD- $\rightarrow$ 20  $\mu\text{m}$  MCPs, 373  $\text{cm}^2$  (97% active area)
- Capacitive Coupling  $\rightarrow$  flexible pickup pattern modification
- Direct Coupling  $\rightarrow$  2.5 mm pixels

## *Performance vs Other sensors*

- LAPPD Gain  $\geq$  SiPM or Planacon Gain
- LAPPD TTS  $>$  SiPM TTS
- LAPPD Readout Channels  $\leq$  SiPM or Planacon Channels
- LAPPD Dark Rates  $\ll$  SiPM Dark Rates at room temperature
- LAPPD PDE  $<$  SiPM PDE
  - To be addressed in upcoming SBIR

***LAPPD or HRPPD Price per unit area  $\leq$  SiPM or Planacon***

Small Business name: **Incom Inc.**

Principal Investigator: **Cole Hamel**  
E-mail: [chamel@Incomusa.com](mailto:chamel@Incomusa.com)

Topic / subtopic: **C55-24. A2 Advances in Detector and Spectrometer Technology, 2. Cherenkov detectors**  
DOE Opportunity # **DE-FOA-0002783** Application Type: **Phase I SBIR**



## **“LAPPD & HRPPD: Fast Photosensors for EIC and other Particle Physics Applications”**

### **Critical LAPPD / HRPPD developments to optimize performance customized for EIC**

- 1) **Photocathode and PDE Optimized for Aerogel Cherenkov Signals** – EIC RICH will use a silica aerogel Cherenkov radiator with a useable wavelength range above ~350 nm. The LAPPD PC will be modified to improve PDE in this range. Program objectives include PC QE  $\geq 30\%$  and PDE  $\geq 20\%$  for  $\lambda \geq 400$  nm, to be met as follows:
  - a) **Photocathode Peak and QE** – 20% QE at 450 nm was previously (DE-SC0019821) achieved by modifying the chemistry of Incom’s Na<sub>2</sub>KSb bialkali photocathodes. This work will be extended to achieve  $\geq 30\%$  QE at >400nm.
  - b) **Photon Detection Efficiency** – Incom will establish (for the first time) the ability to measure PDE. In addition to red shifting QE, PDE  $\geq 20\%$  for  $\lambda \geq 400$  nm, to be achieved by developing ALD-MCPs with higher OAR.
- 2) **Sensor Readout** - Tests on LAPPD and HRPPD with fully populated readout to optimize pixel shape, size, and number, including for the availability, cost and performance of recommended electronics.
- 3) **Sensor Form Factor** - Modify LAPPD/ HRPPD dimensions for optimal lay out and tiling of sensors.
- 4) **Confirmation of Device Lifetime** – Measured 5 C/cm<sup>2</sup> extracted charge with no deterioration of gain. These results will be confirmed, extended, and validated replicating specific EIC RICH and DIRC conditions, and for the specific



# The Sensors: LAPPD™ - Large Area Picosecond Photodetector Pixelated Capacitively Coupled Readout

- **20 cm x 20 cm MCP-PMT**
  - Single photon sensitivity
  - Chevron pair of ALD-functionalized MCPs
    - **(20  $\mu\text{m}$  pores)**
  - Glass/Ceramic package
  - **373 cm<sup>2</sup>** effective area (97% open area)
- **High Gain ( $\sim 10^7$ )**
- **Bialkali Antimonide Photocathode**
  - Sodium-Potassium-Antimony  $\text{Na}_2\text{KSb}$
  - **>30%** QE at 365 nm
  - **>95%** spatial uniformity
- **Timing Resolution**
  - SPE:  **$\sim 50$  ps** (Vagnoni, INFN)
  - 150 GeV induced EM shower:  **$\sim 8$  ps** (Vagnoni, INFN)
- **Position Resolution**
  - **< 0.6 mm with 6 mm pixel**

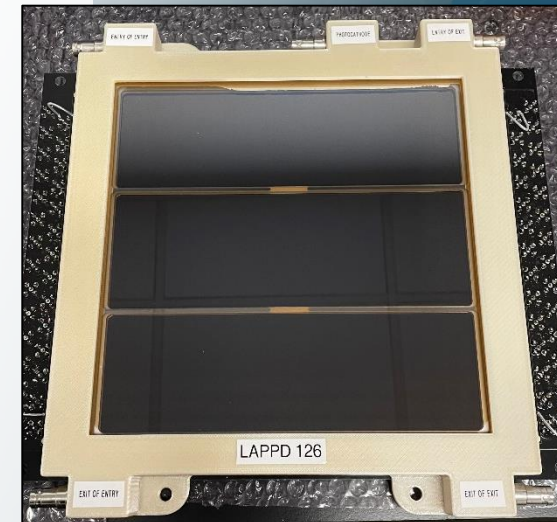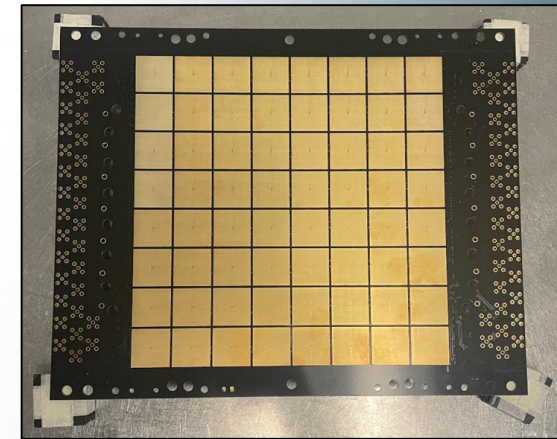




# The Sensors: Capacitively Coupled (CC) HRPPD

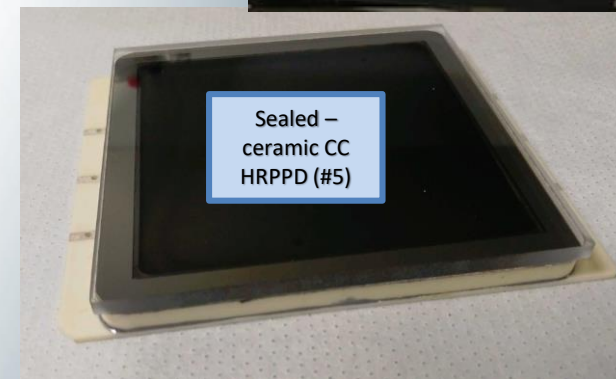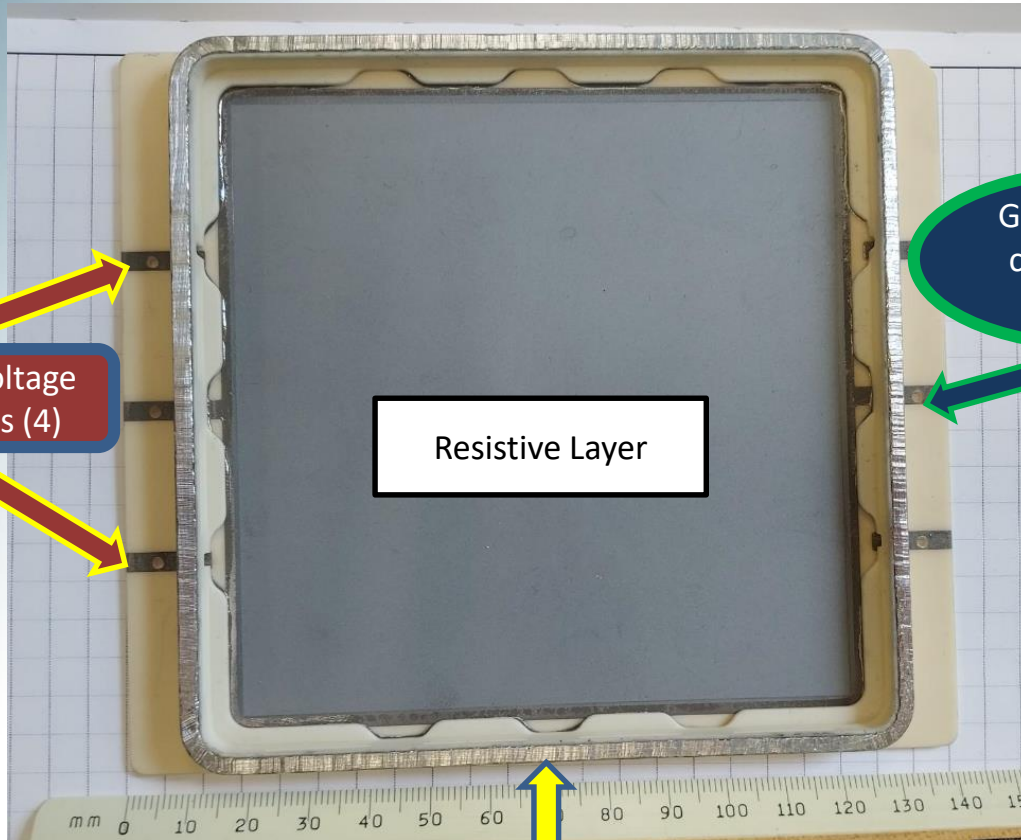


# Critical Developments - QE vs Wavelength

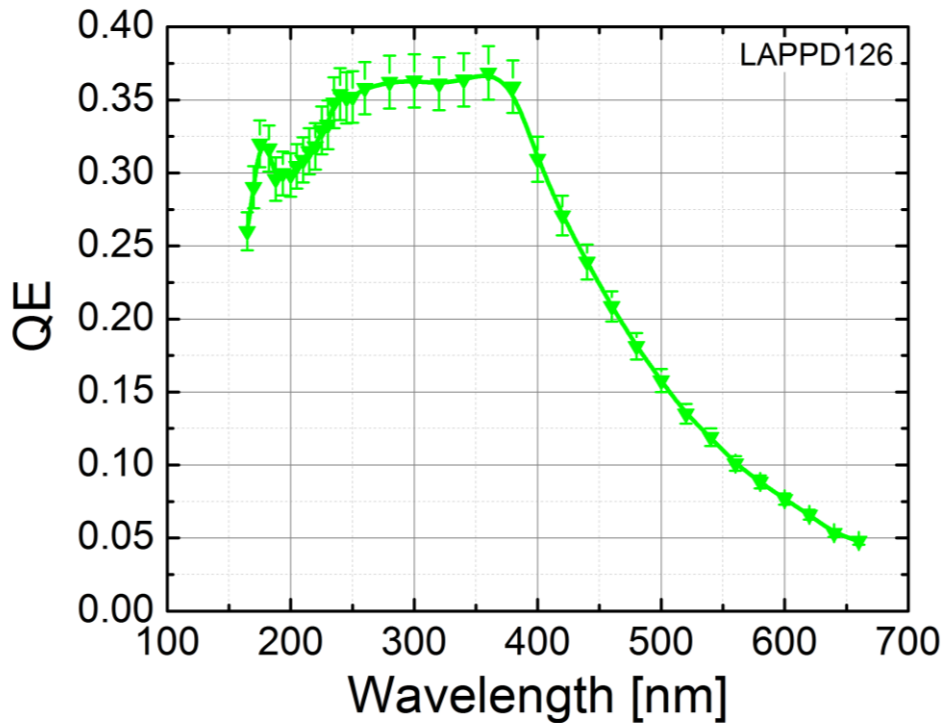

- UV grade Fused Silica glass window
  - Cutoff wavelength: **~160 nm**
- Peak at **~365 nm**
- Will Red-shift this spectrum
  - Make the peak wider using other alkali metals
  - Or red-shift the peak using alternate chemistries

# EIC Critical Developments - Photon Detection Efficiency


- The Biggest Challenge for using the LAPPD/ HRPPD in EIC is the better photon detection efficiency of SiPMs
  - 40% PDE at 450 nm
- Best estimate for LAPPD
  - 14% PDE at 450 nm
  - 20% QE x 70% OAR
- This proposed SBIR would bring LAPPD PC QE to 30% at 450 nm
  - At best PDE=QE
  - Measure this value
- Steps to improve LAPPD PDE
  - Higher QE
  - Funnel-shaped MCP Pores
  - Electron Steering

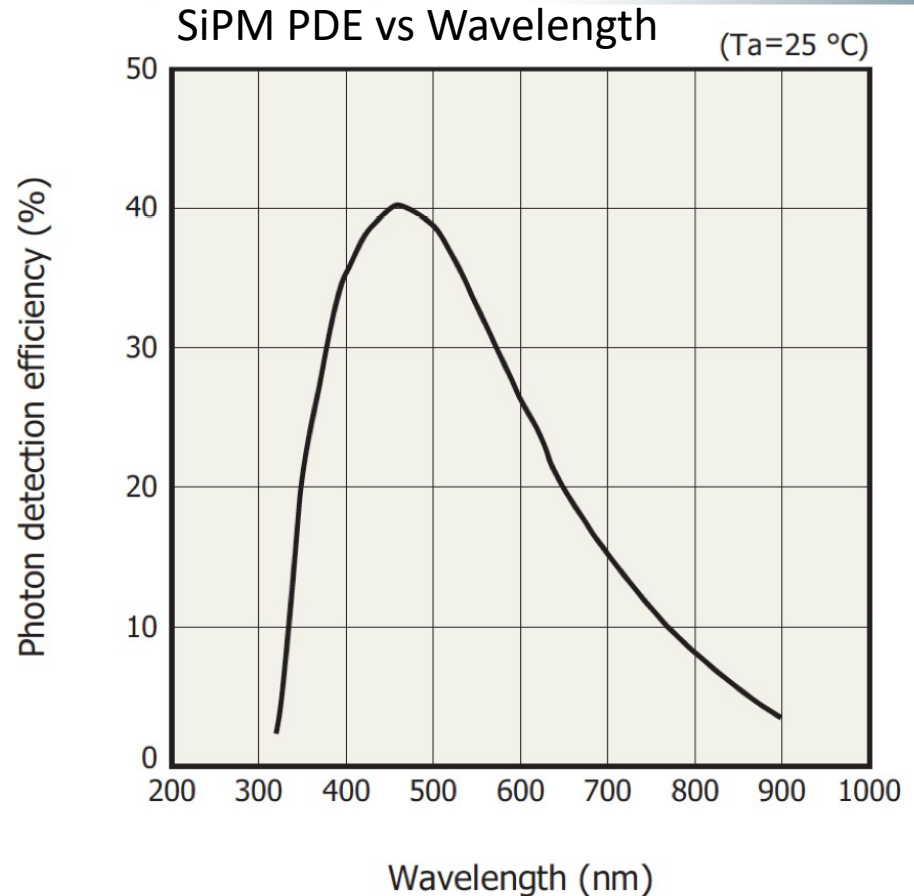

# EIC Critical Developments - Electronics

## Software

- Easy-to-use interface
  - Export mode
  - Easy mode
- Toolbox for quick access
- Real time visualization
- Flexible number of channels on display
- CSV/binary export

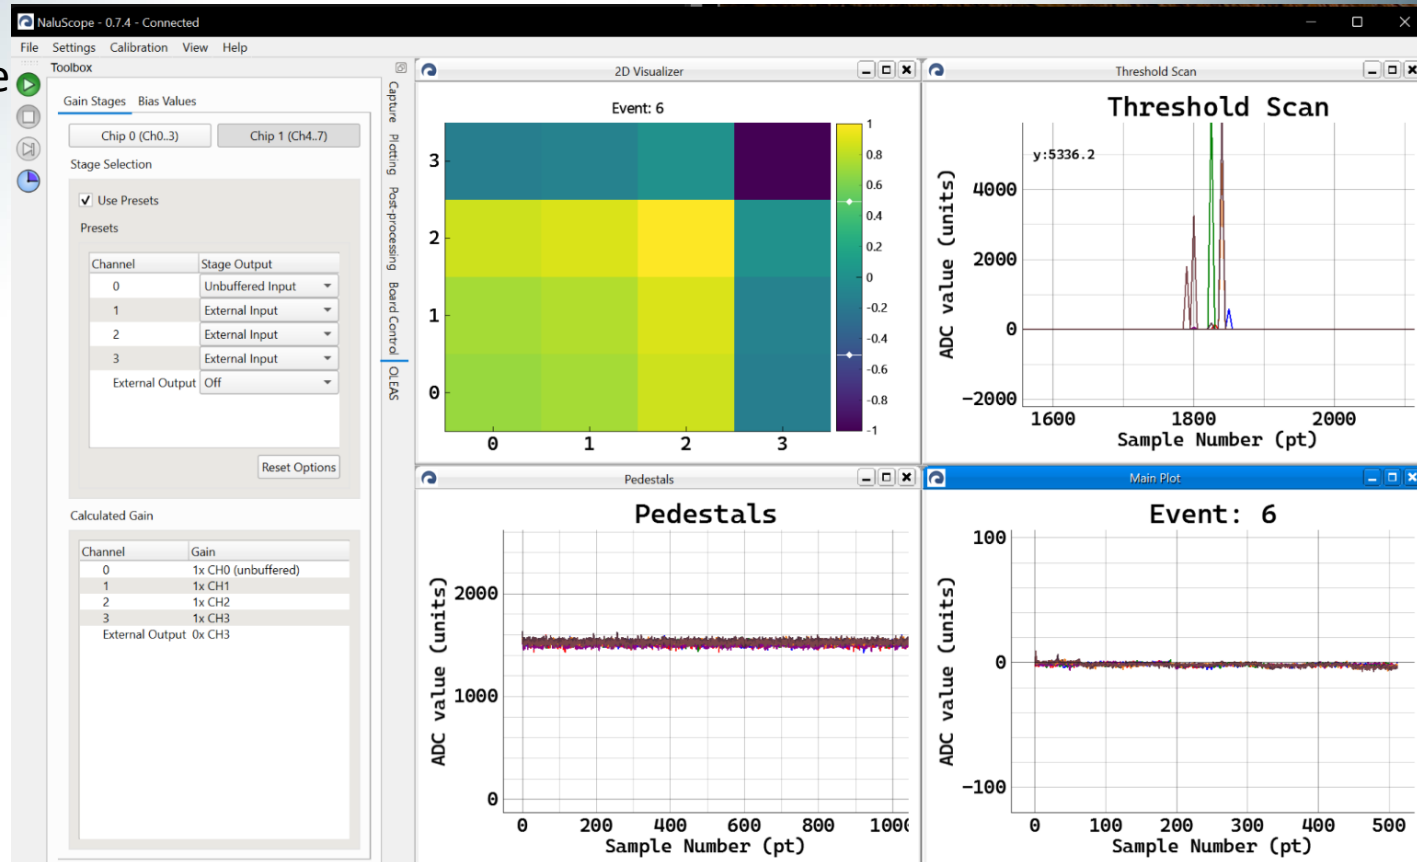

Slides Courtesy of NALU Scientific

LAPPD Workshop II - October 26, 2022

# EIC Critical Developments - Electronics

## Software Features

Straightforward readout configuration

- Tools for calibration generation and data correction
- Tools for data visualization and processing
- Automatically export data to disk while capturing

Captured data is stored with all calibration data and board parameters used for easy offline analysis.

The screenshot shows the 'Capture' configuration window. It includes a 'Mode' section with radio buttons for 'Trigger' (selected), 'ROI', and 'Auto'. Below are 'Limit events' (set to 1) and 'Limit buffer' (set to 5000) with 'Start Acquisition' and 'Stop Acquisition' buttons. The 'Readout channels' section has a row of buttons for channels 0 through 7. The 'Trigger' section has radio buttons for 'Source' (External, Signal - selected), 'Edge' (Raising - selected, Falling), and 'Interval' (Forced, Relative - selected). The 'Read window' section has 'Read windows' (8), 'Lookback' (15), and 'Write after trig' (5) settings. The 'Trigger values' section is a table with columns for Channel, Offset, and Level, with rows for CH 0, CH 1, CH 2, and CH 3, each having a checked checkbox and numerical input fields.

Channel	Offset	Level
<input checked="" type="checkbox"/> CH 0	0	0
<input checked="" type="checkbox"/> CH 1	0	0
<input checked="" type="checkbox"/> CH 2	0	0
<input checked="" type="checkbox"/> CH 3	0	0

Capture Toolbox

The screenshot shows the 'Calibration' menu with options: 'Trigger baseline', 'Threshold scan', 'Generate Pedestals', 'Load Pedestals', 'Save Pedestals', 'Reset Pedestals', 'Load Time calibration', 'Save Time calibration', 'Reset Time calibration', 'ADC2mV calibration', 'Save calibration', 'Load calibration', and 'DAC Sweep'. At the bottom, there are radio buttons for 'External' and 'Signal' (selected).


Calibration

Slides Courtesy of NALU Scientific



# Technical Specifications: LAPPD for EIC Detectors

- Incom is aware of 3 EIC Detectors
  - Lepton Endcap: mRICH or pf-RICH
  - Central Detector: DIRC
  - Hadron Endcap: dRICH
    - Need more details about this one
    - Assume requires 75 LAPPDs

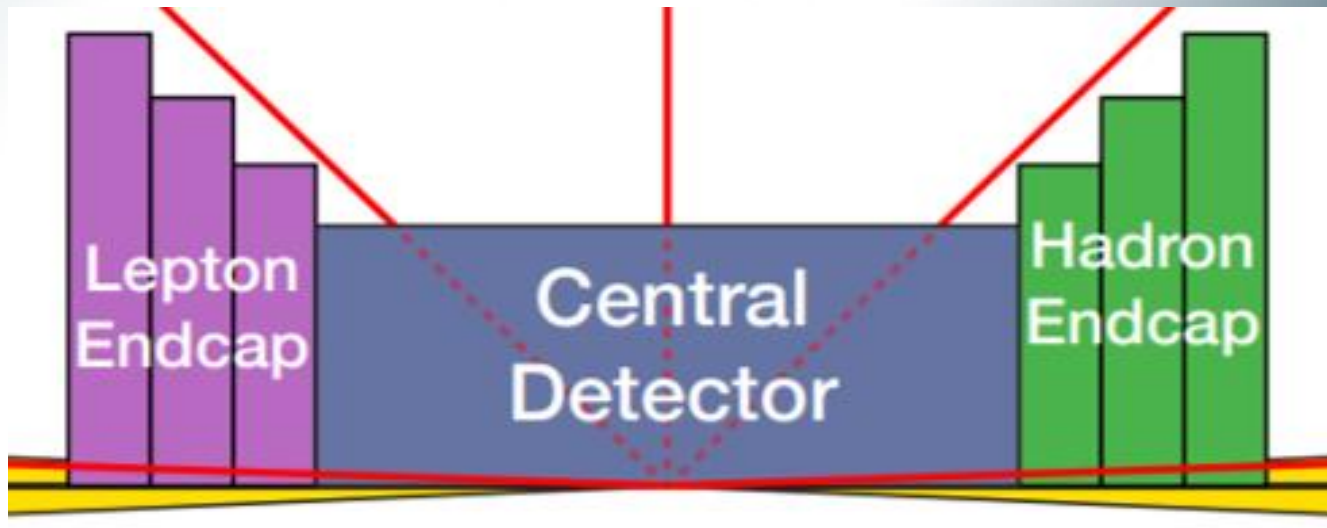


Source: Backward Cherenkov based PID for EIC Detector 1, meeting 6/13/22

# Technical Specifications:

## HRPPD vs Photonis Planacon for DIRC

- For DIRC, there are 12 prisms, each 24 x 36 cm
- HRPPD is 10 cm x 10 cm (plus some outside edge)
  - With 2.5 mm DC pixels -> 1024 channels / HRPPD
  - ~75 HRPPDs for DIRC
  - Dark rates <2 kHz/cm<sup>2</sup> at room temperature
- Planacon is 5 cm x 5 cm
  - 6 mm pixels -> 256 Channels / Planacon
  - 300 Planacons for DIRC
    - @ \$15k = \$4.5 Million
    - Equivalent to \$60k / HRPPD
    - But HRPPDs will be ~\$20-\$25k each

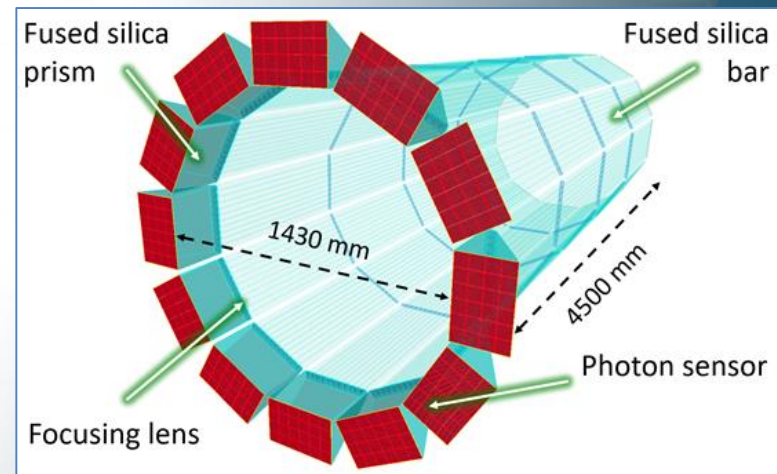

Thanks to Grzegorz Kalicy for the image of the proposed DIRC detector