

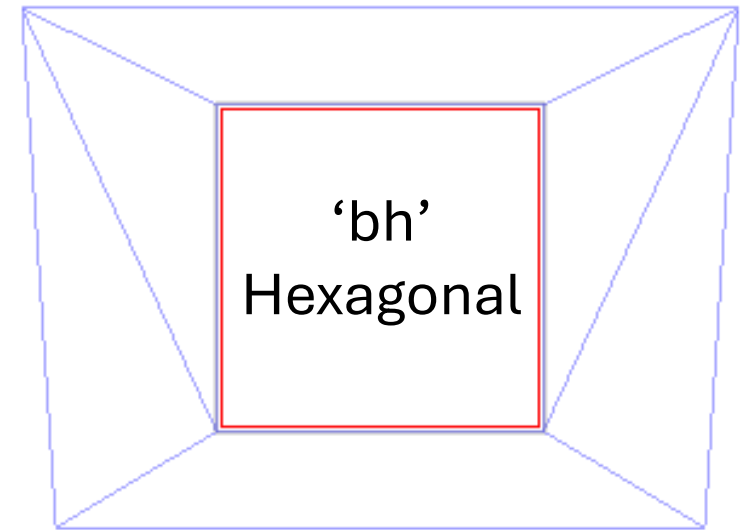
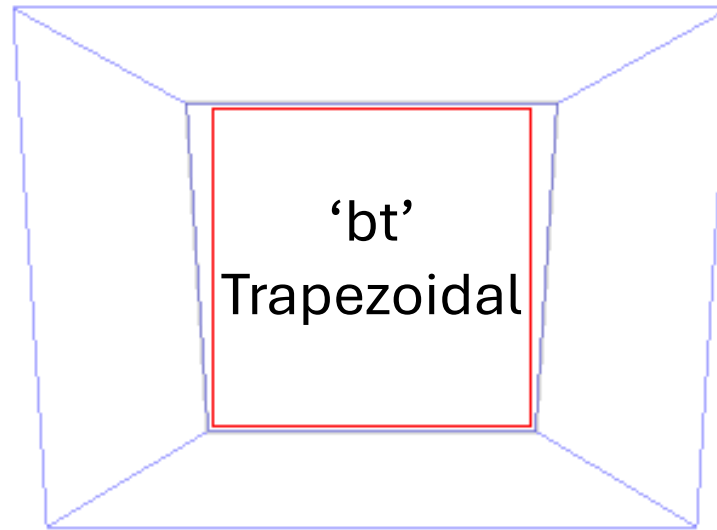


# Alternate Light Guide Shapes

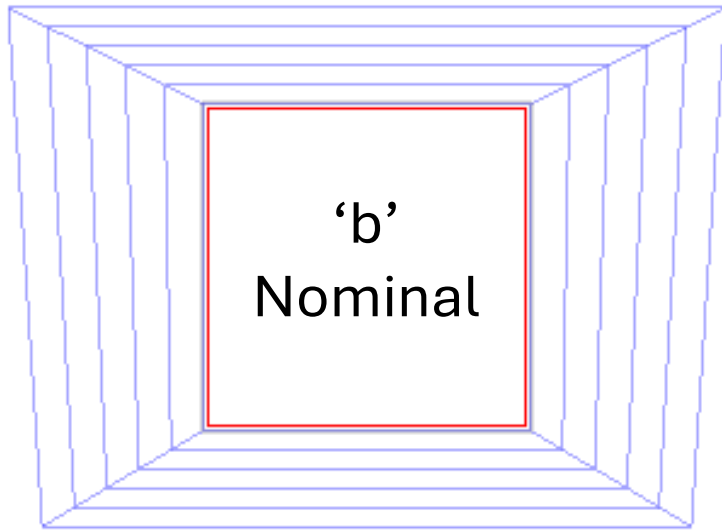


Compare efficiencies and NAAD (flatness metric) vs. layer for particular lengths with and without Si cookie


# 45 mm cookie S13-BIC Efficiency vs. Layer

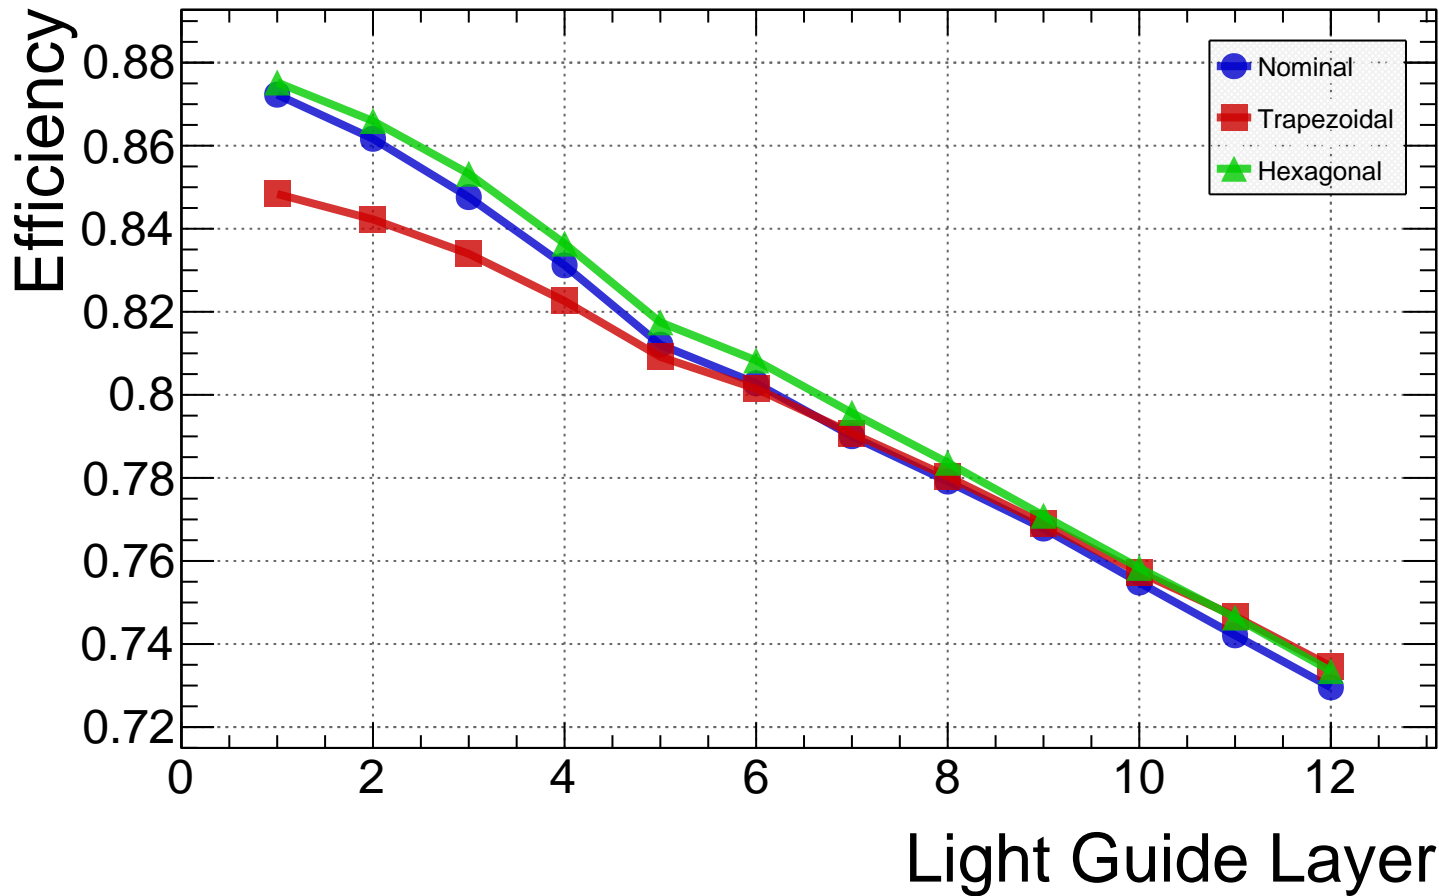


# 50 mm cookie S13-BIC Efficiency vs. Layer

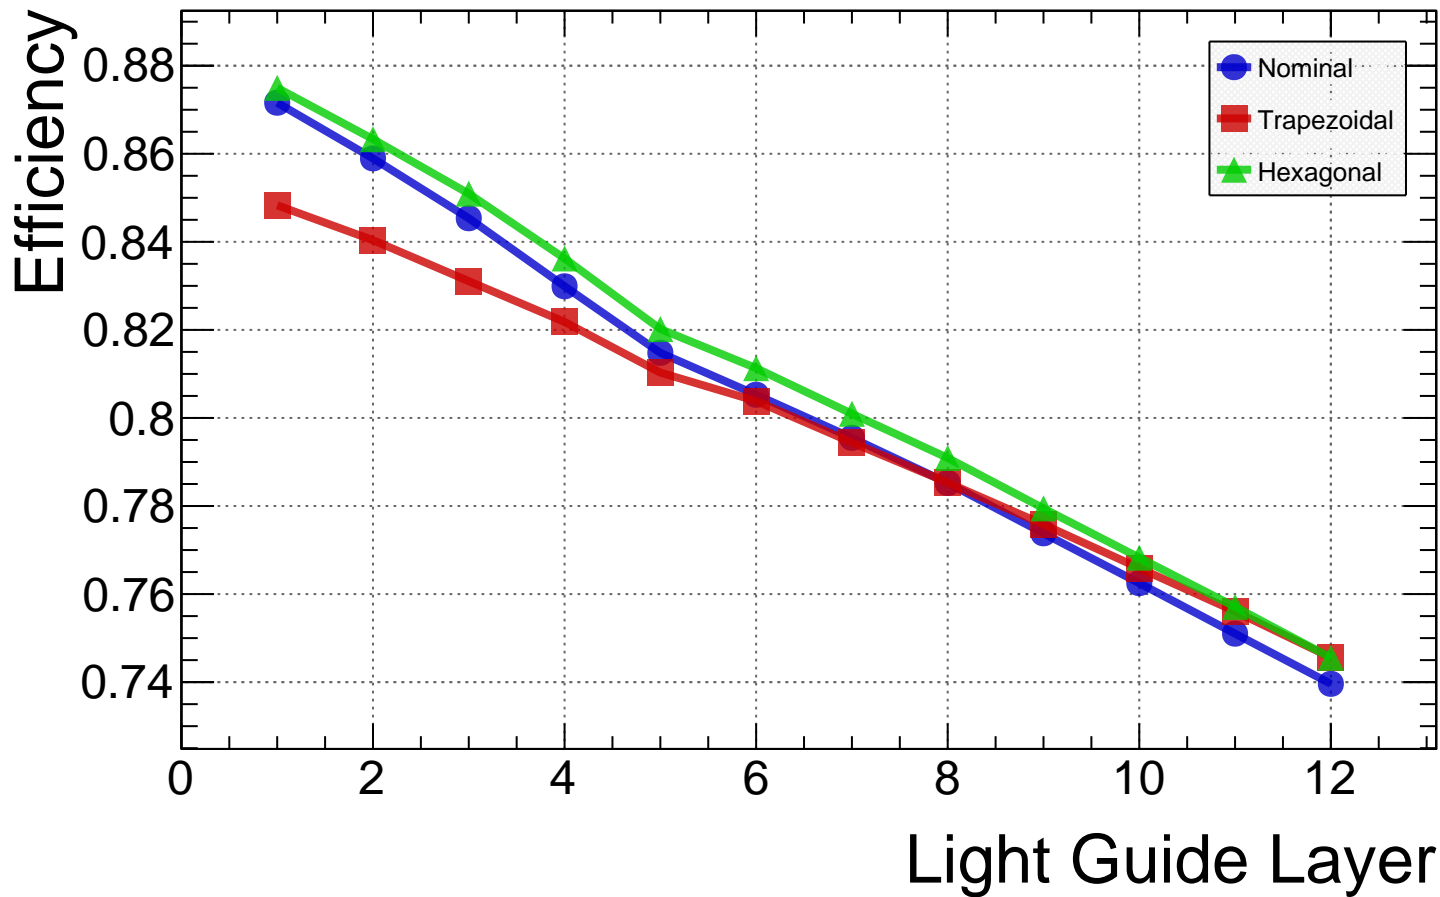


# 45 mm cookie S13-BIC NAAD vs. Layer

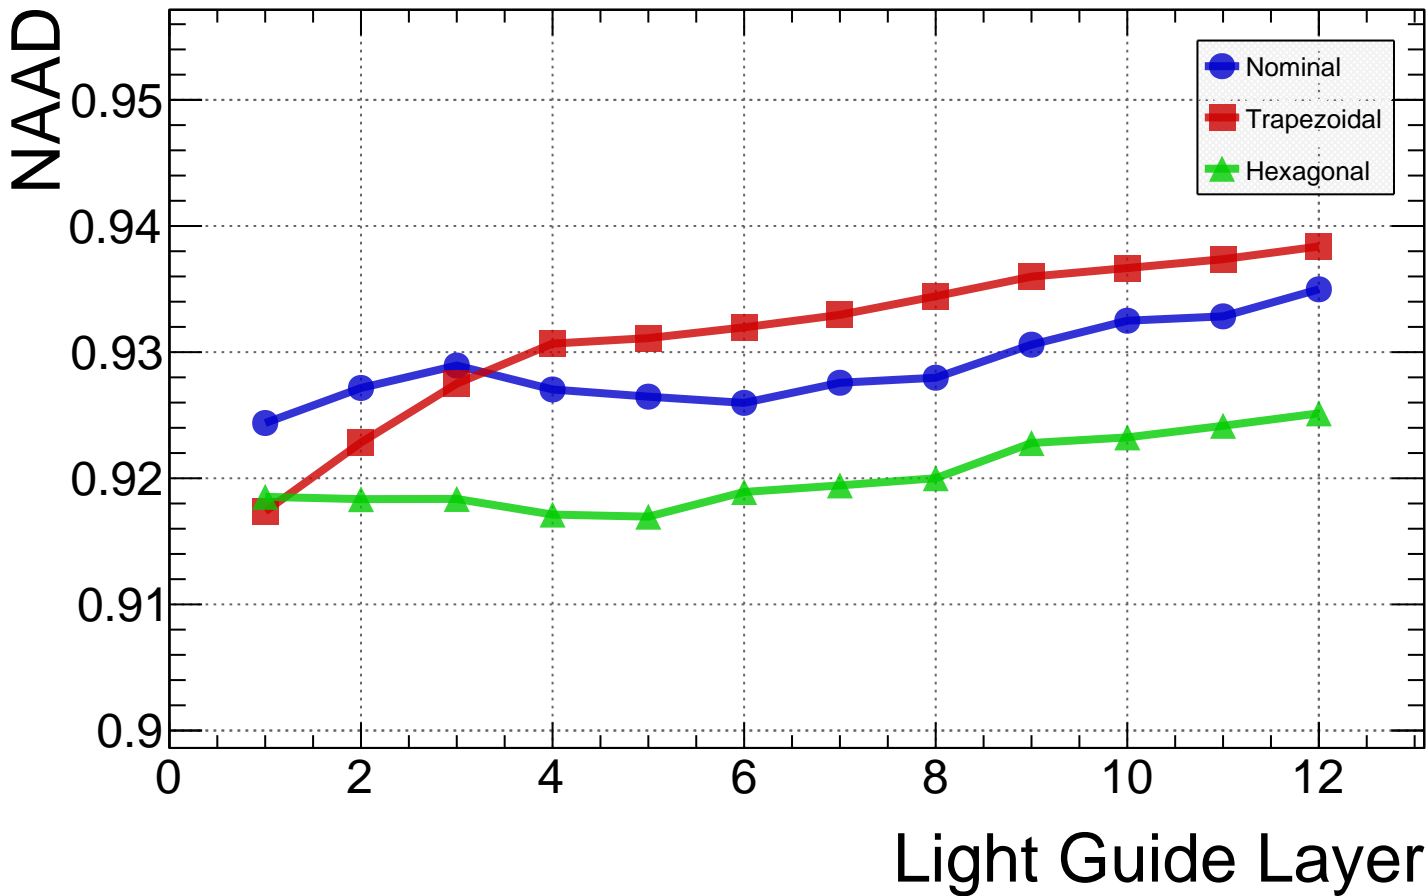


# 50 mm cookie S13-BIC NAAD vs. Layer

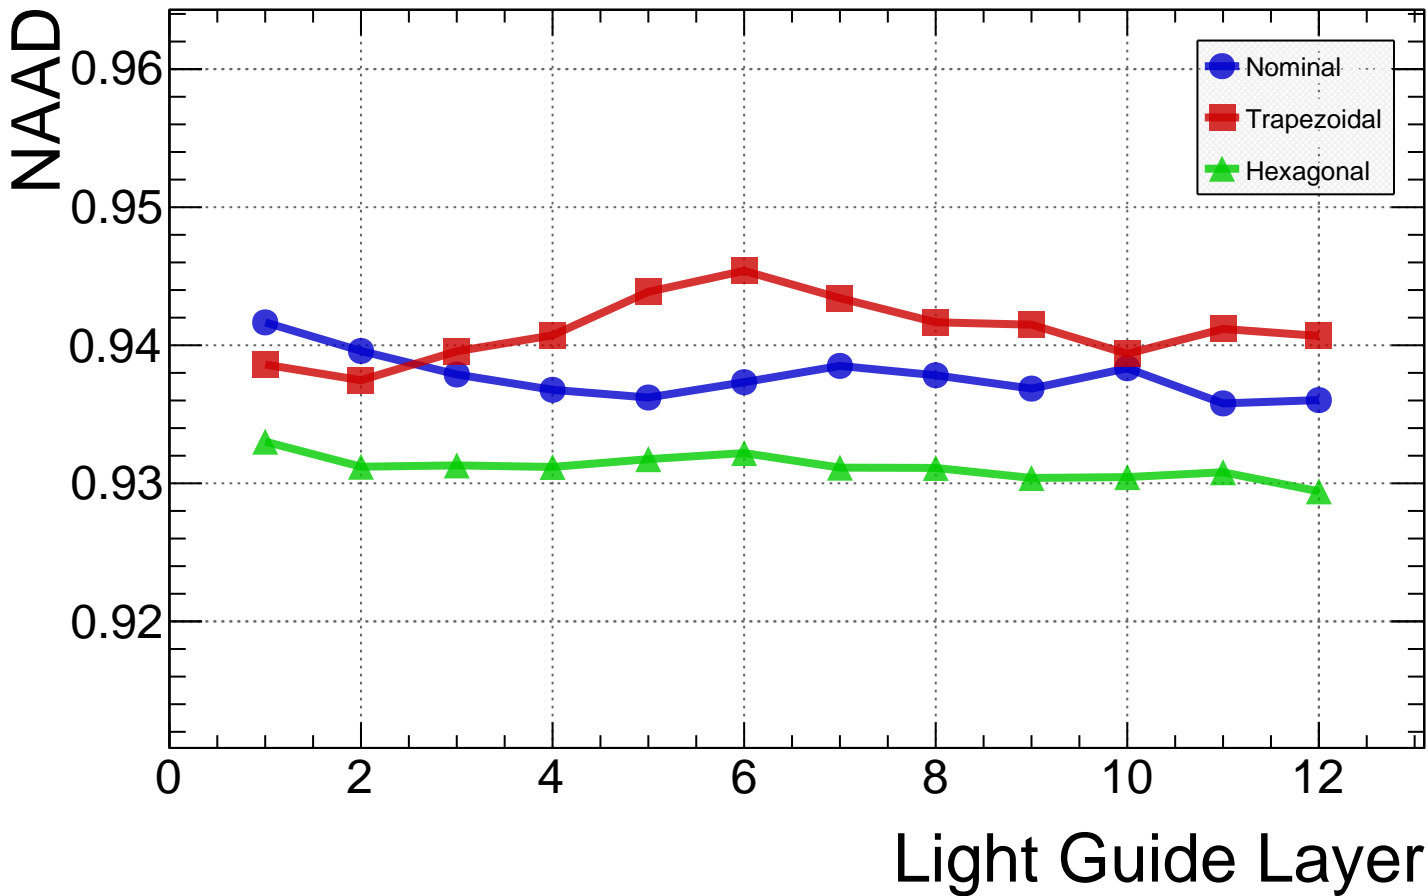


# 45 mm air S13-BIC Efficiency vs. Layer

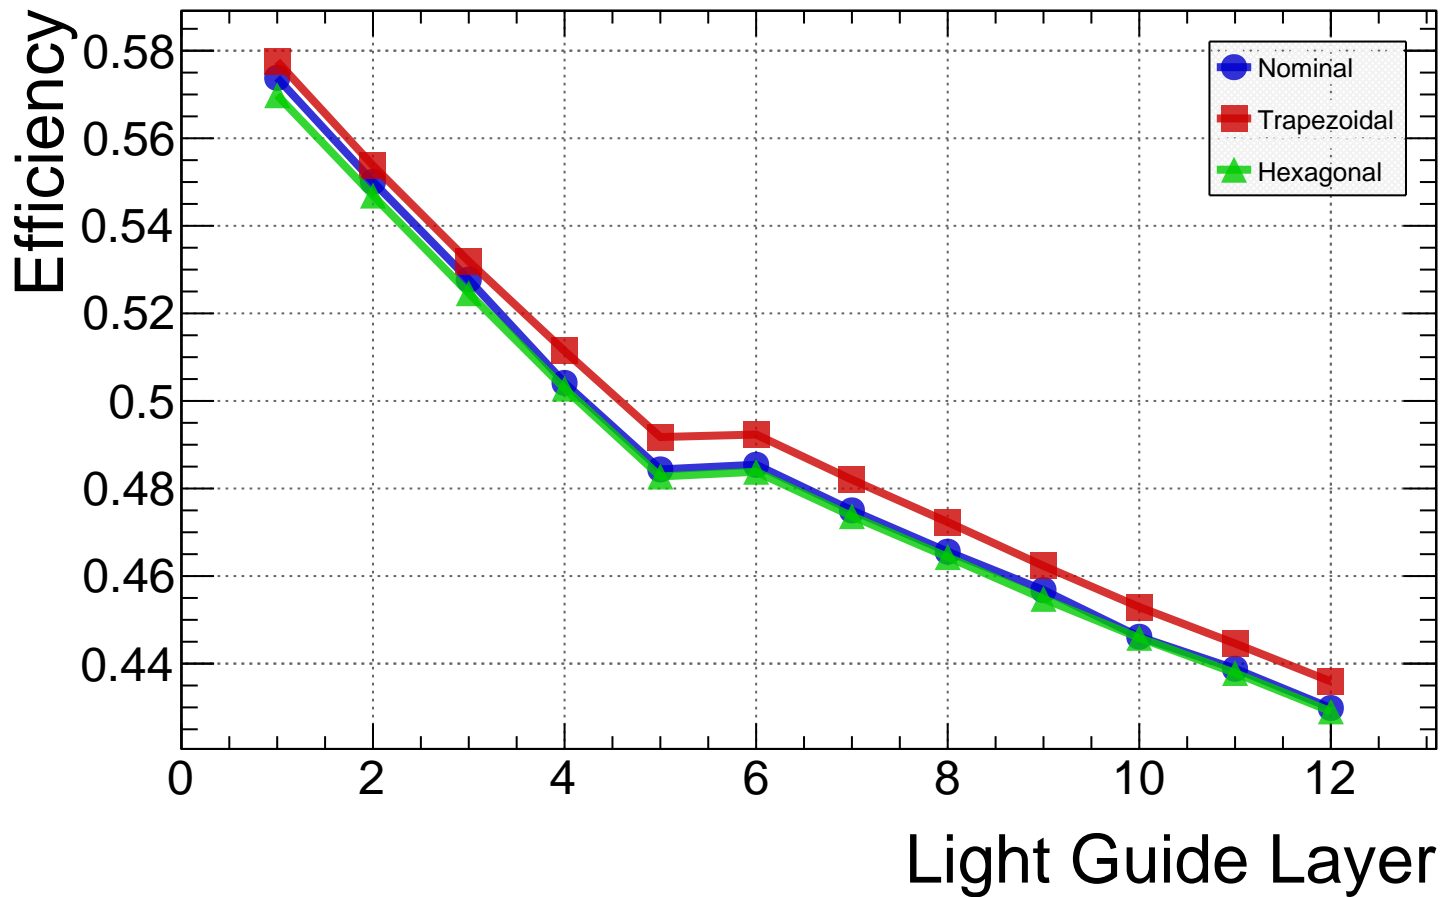

# 50 mm air S13-BIC Efficiency vs. Layer

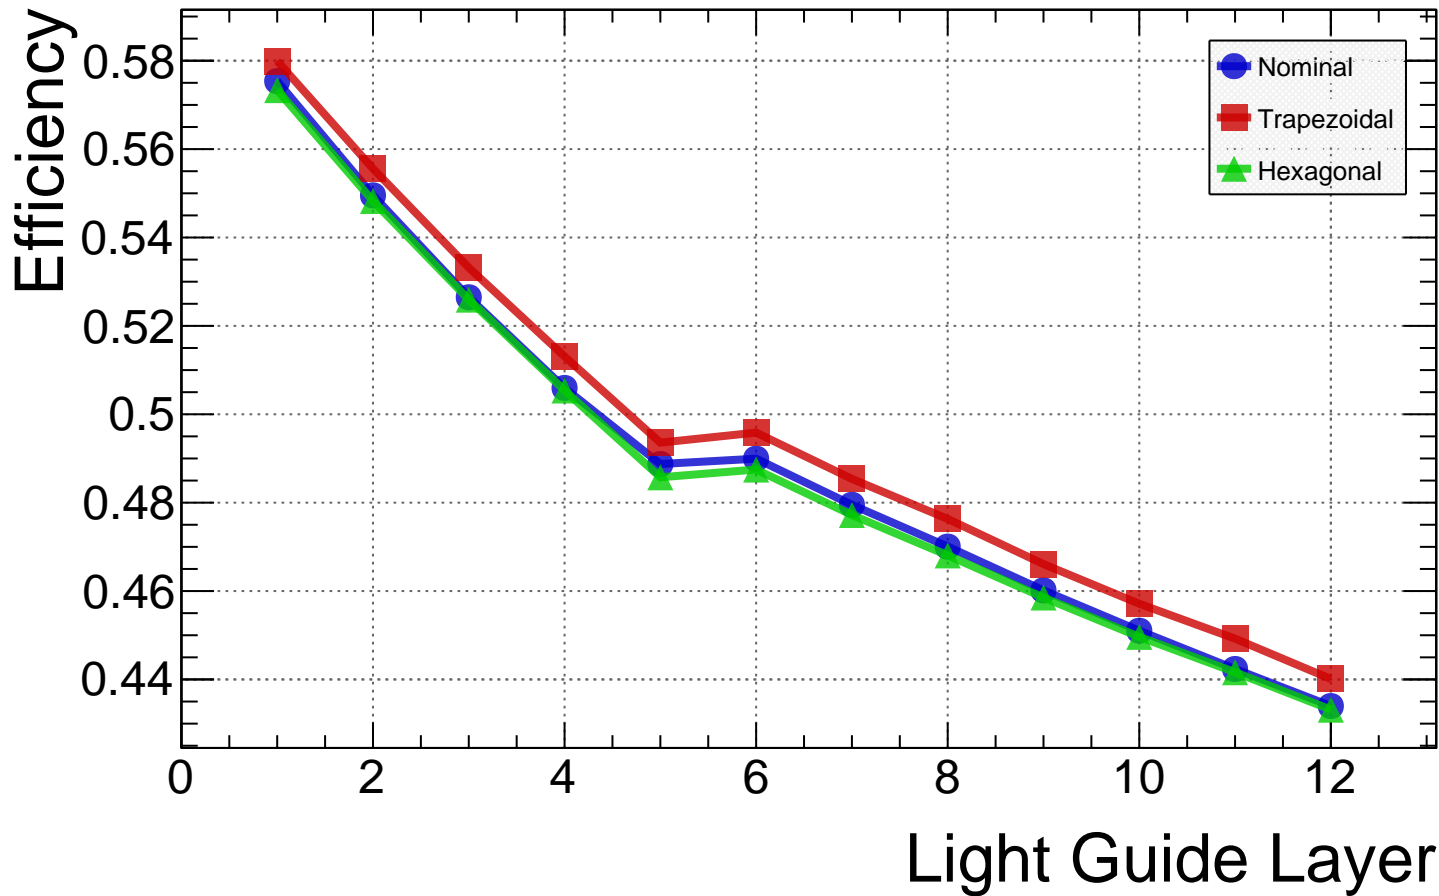

# 45 mm air S13-BIC NAAD vs. Layer

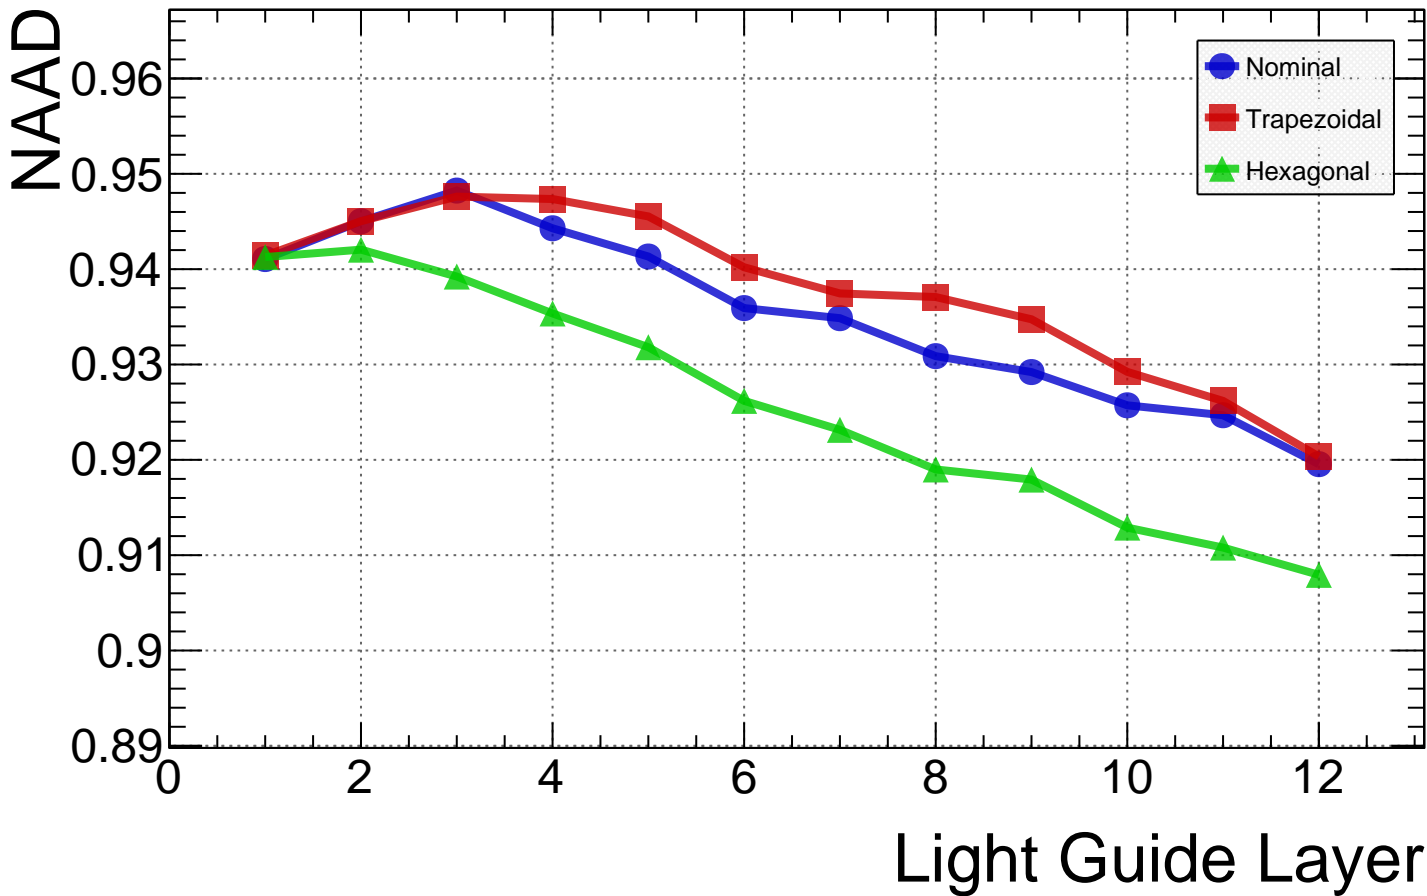



# 50 mm air S13-BIC NAAD vs. Layer

