


Tunable Laser Positron Source

308093 - CO₂-Laser driven plasma to post-process positron-electron jets



A. Sahai (PI), [CU](#)
H. Chen, [LLNL](#), A. Thomas, [U Michigan](#)
J. Resta-Lopez, [Cockcroft Inst. & U Valencia](#)
V. Harid, M. Golkowski, [CU](#)
S. Palaniyappan, [LANL](#), J. Cary, [Tech-X & CU](#)

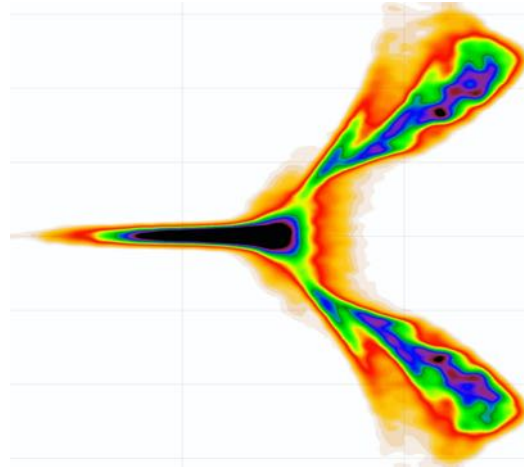

Funding: [DOE / NSF](#)
Funding status: [proposed](#)

Key scientific goals





- positron beams with tunable properties using CO₂ laser-driven plasma structures
- **control the interaction** between
ATF e⁻-beam driven *positron-electron jets / showers* and CO₂ *laser-driven plasma*
- long wavelength CO₂ laser (compared to Ti:Sapphire):
larger plasma structures – easier to physically overlay the showers
slower structures for a lower plasma density – laser velocity slower for same density

PHYSICAL REVIEW ACCELERATORS AND BEAMS **21**, 081301 (2018)

**Quasimonoenergetic laser plasma positron accelerator
using particle-shower plasma-wave interactions**

- **limits of the range of tunability** of CO₂ laser produced positron beams
- **numerous applications** benefit from a tunable positron beam

Current positron sources

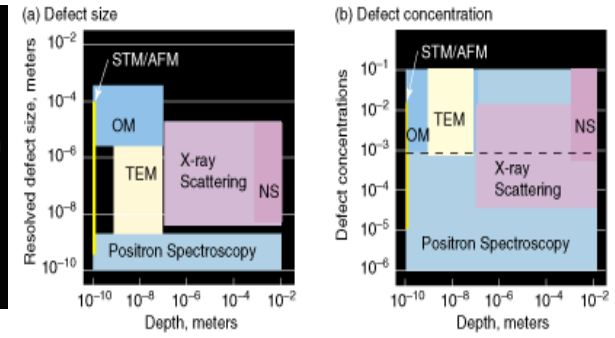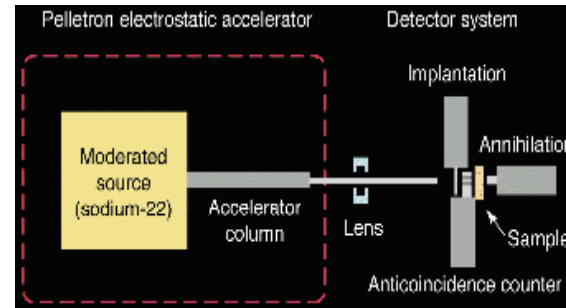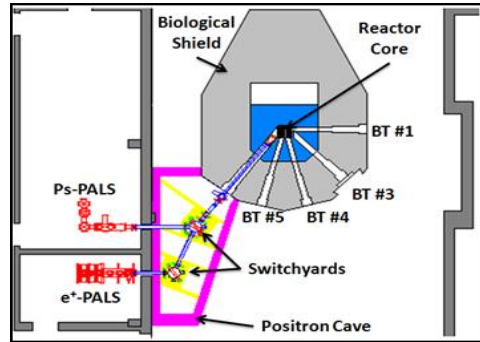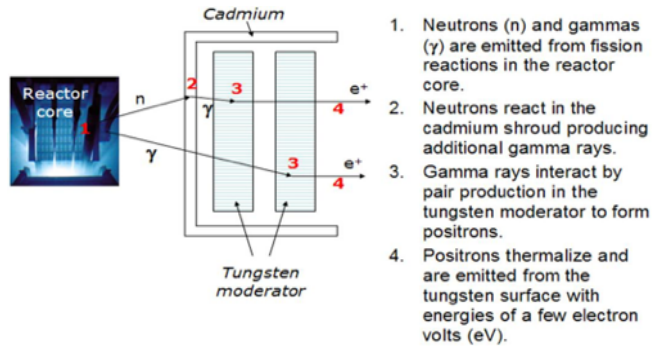


PULSTAR NCSU Fission reactor - positron source user-facility
[source: <https://www.ne.ncsu.edu/nrp/user-facilities/intense-positron-beam/>]

LLNL Na-22 beta plus positron source and positron spectroscopy
[source: <https://str.llnl.gov/str/Howell.html>]

nuclear reactor

radioactive nuclei

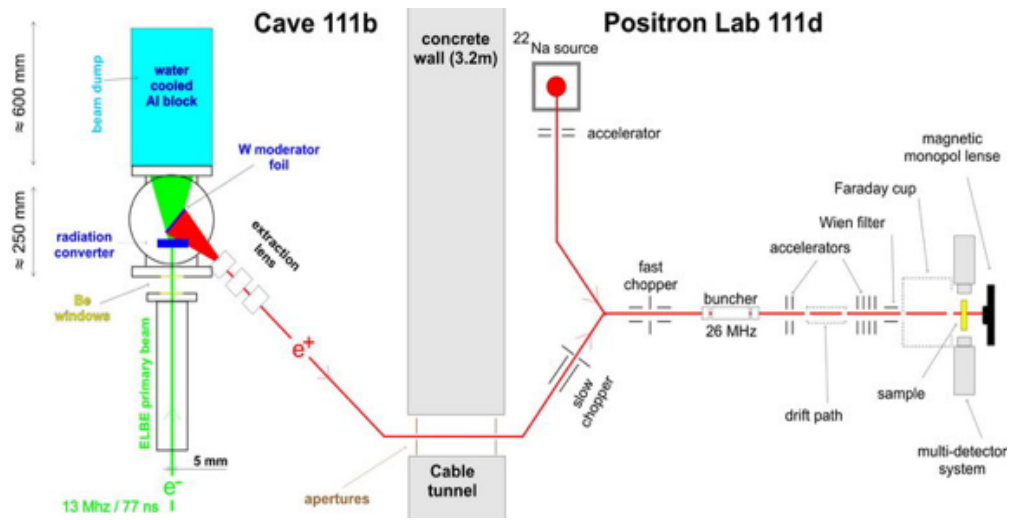

HZDR Germany - ELBE Positron (EPOS) facility
[source: <http://positron.physik.uni-halle.de/EPOS/>]

electron linac

PHYSICAL REVIEW B

VOLUME 3, NUMBER 3

1 FEBRUARY 1971

Channeling of Positrons

J. U. Andersen* and W. M. Augustyniak
Bell Telephone Laboratories, Murray Hill, New Jersey 07974

and

E. Uggerhøj
Institute of Physics, University of Aarhus, 8000 Aarhus C, Denmark
 (Received 7 July 1970)

IEEE Transactions on Nuclear Science, Vol. NS-26, No. 3, June 1979

CHANNELING RADIATION FROM POSITRONS

M. J. Alguard,* R. L. Swent,* R. H. Pantell,* B. L. Berman,† S. D. Bloom,† and S. Datz‡

VOLUME 77, NUMBER 10

PHYSICAL REVIEW LETTERS

2 SEPTEMBER 1996

Increased Elemental Specificity of Positron Annihilation Spectra

P. Asoka-Kumar,¹ M. Alatalo,¹ V. J. Ghosh,¹ A. C. Kruseman,² B. Nielsen,¹ and K. G. Lynn¹

¹Brookhaven National Laboratory, Upton, New York 11973

²IRI, Delft University of Technology, Mekelweg 15, NL-2629JB Delft, The Netherlands


Spatial sampling of crystal electrons by in-flight annihilation of fast positrons

A. W. Hunt*†, D. B. Cassidy*†, F. A. Selim‡, R. Haakenaasen§,
 T. E. Cowan†, R. H. Howell†, K. G. Lynn|| & J. A. Golovchenko*¶#

NATURE | VOL 402 | 11 NOVEMBER 1999



LLNL 2.65 MeV positron

²²Na source – 10⁵/s



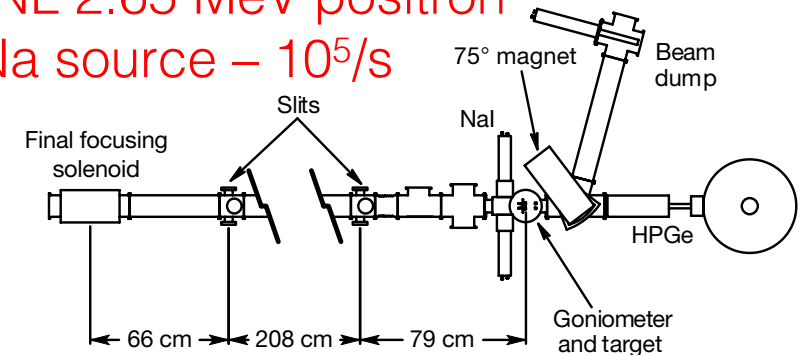





...development of practical atomic-scale channeling measurements of electronic spin densities, and momentum profiles in addition to valence and bonding e⁻ density maps.

LLNL – kJ laser positron-production

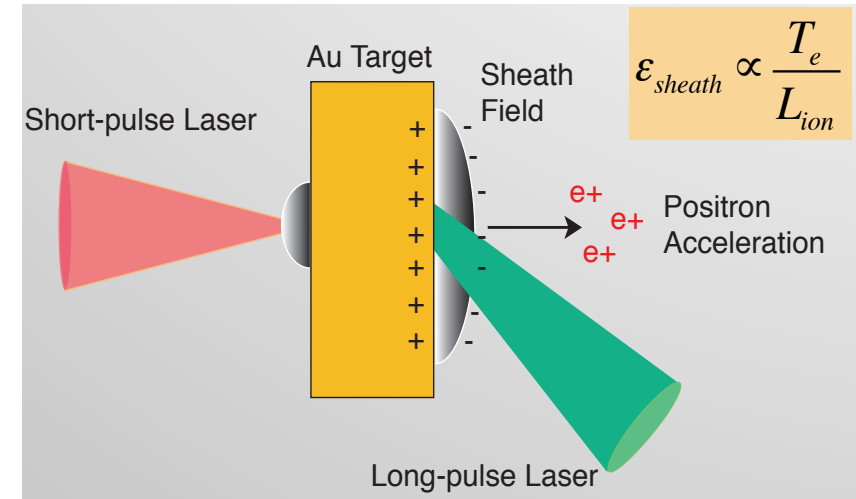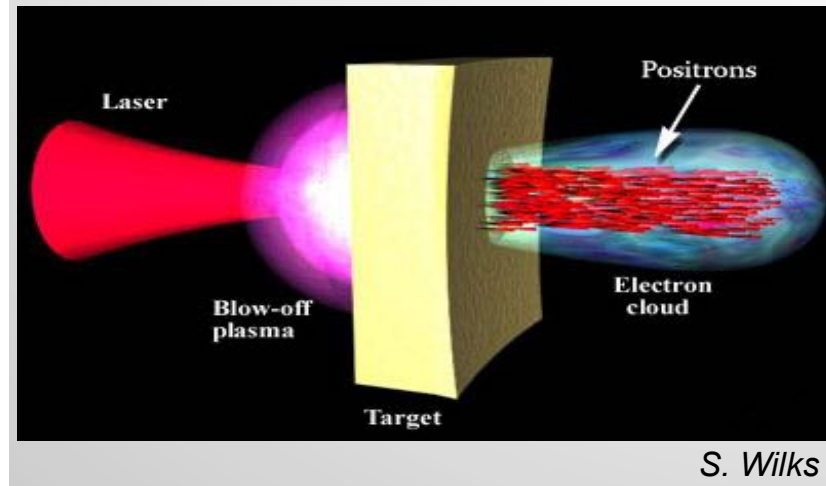

H. Chen et. al.
PRL 105, 015003
(2010)

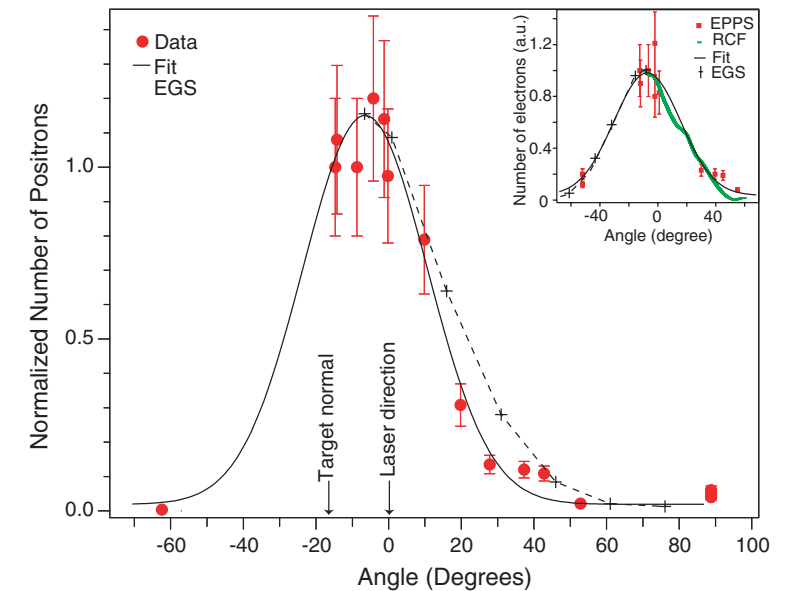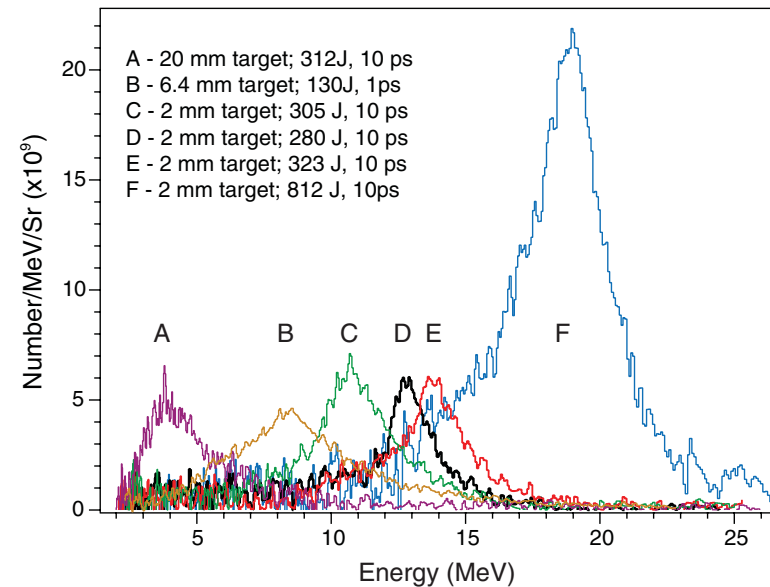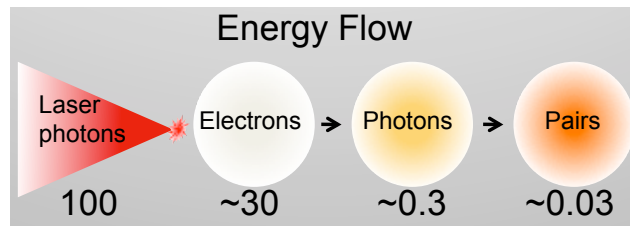

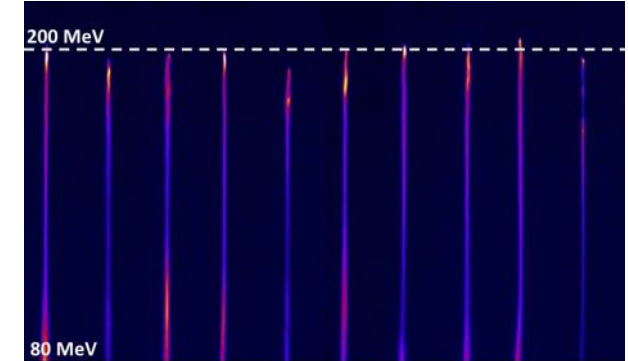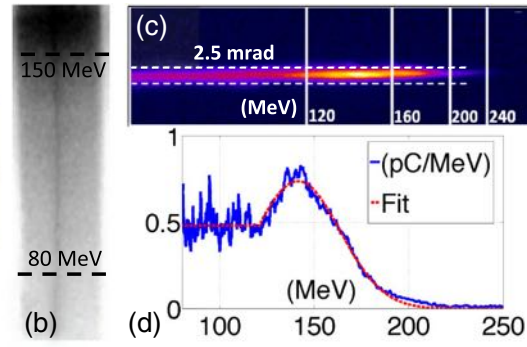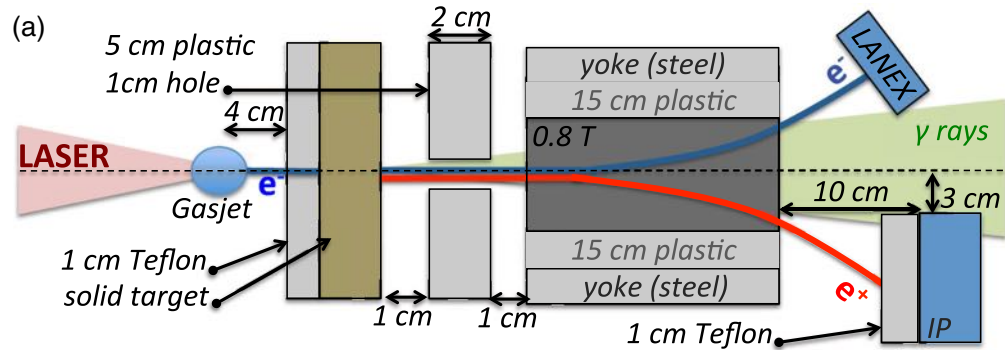

Supplementary material Figure 1: Typical series of ten spectra of the laser-accelerated electron beam, as recorded on the LANEX screen before the insertion of the solid target. The overall electron beam charge fluctuated within less than 10% and the peak electron energy was consistently of the order of 200 MeV.

Mat.	d (mm)	θ_{e^+} (mrad)	$N_{\text{exp}} \times 10^5$	$N_{\text{sim}} \times 10^5$	$N_T \times 10^5$
Cu	5.3	2.3 ± 0.2	0.3 ± 0.1	0.3	31
Sn	6.4	2.7 ± 0.3	0.6 ± 0.1	0.6	63
Ta	2.8	2.7 ± 0.3	2.1 ± 0.3	2.1	190
Pb	4.2	3.5 ± 0.4	2.3 ± 0.3	2.3	240
Ta	1.4	2.3 ± 0.2	0.8 ± 0.2	0.8	78
Ta	4.2	2.7 ± 0.3	3.8 ± 0.3	3.9	350
Pb	2.2	3.0 ± 0.3	0.7 ± 0.2	0.7	60
Pb	2.8	3.3 ± 0.3	1.1 ± 0.3	1.1	122

increases for materials with higher atomic number. This trend is quantitatively confirmed by integrating the experimental spectra in the range $90 < E_{e^+} \text{ (MeV)} < 120$ (see Table I and Fig. 3). Within this energy range, a maximum positron number of $(2.30 \pm 0.28) \times 10^5$ is obtained for the material with the highest Z (Pb). Fitting the data keeping j as a free parameter, we obtain a best fit for $j = 2.1 \pm 0.1$


Table-Top Laser-Based Source of Femtosecond, Collimated, Ultrarelativistic Positron Beams

G. Sarri,¹ W. Schumaker,² A. Di Piazza,³ M. Vargas,² B. Dromey,¹ M. E. Dieckmann,¹ V. Chvykov,² A. Maksimchuk,² V. Yanovsky,² Z. H. He,² B. X. Hou,² J. A. Nees,² A. G. R. Thomas,² C. H. Keitel,³ M. Zepf,^{1,4} and K. Krushelnick²

- showers $>$ MeV electrons on converter target
- although “some” authors have claimed so:




shower \neq beam
pair-plasma \neq beam

- positrons NOT isolated
- positrons still divergent
- un-localized in momentum space

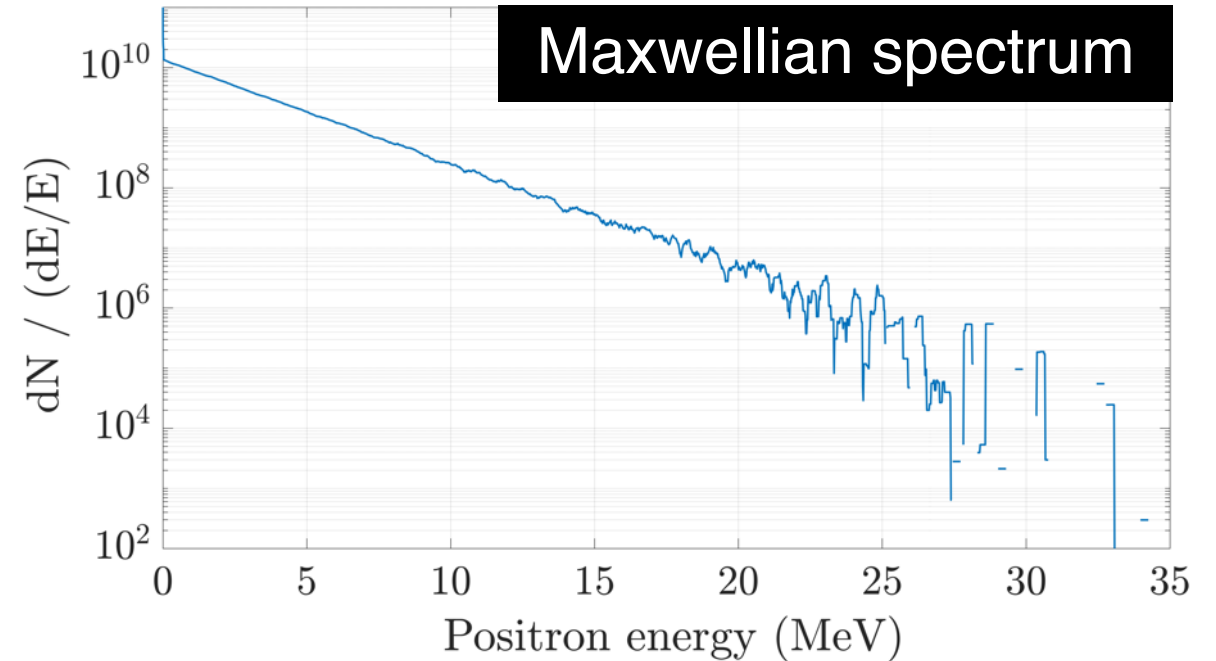

orders-of-magnitude
roll-off at
high-energies

simulations of ATF-beam driven positron-electron showers

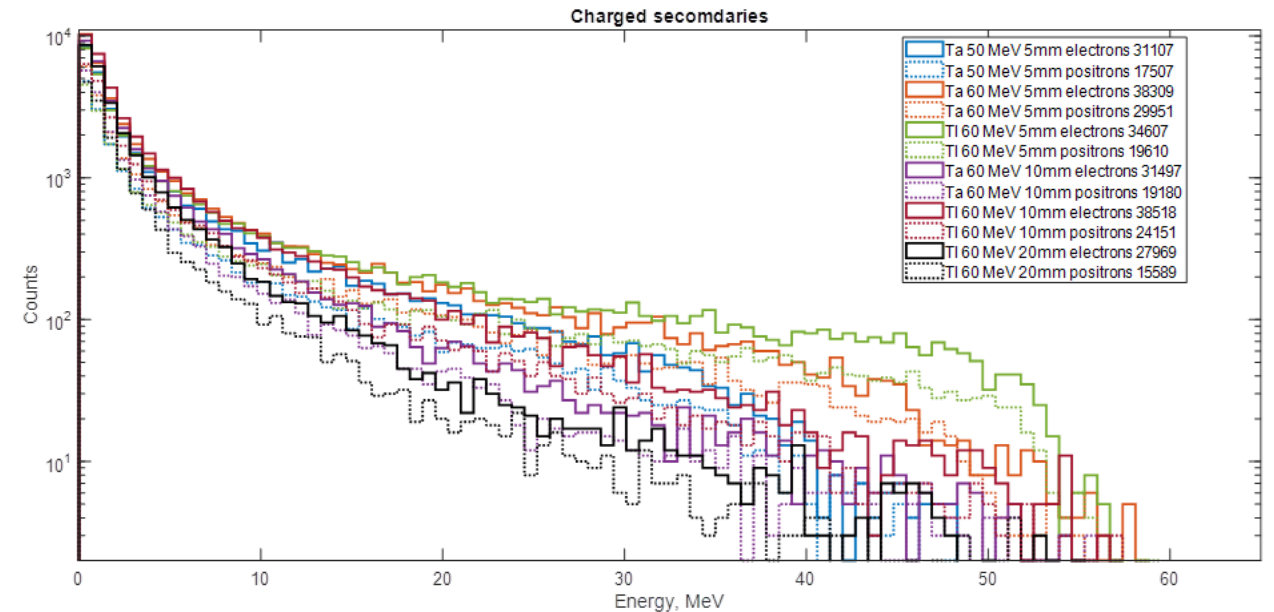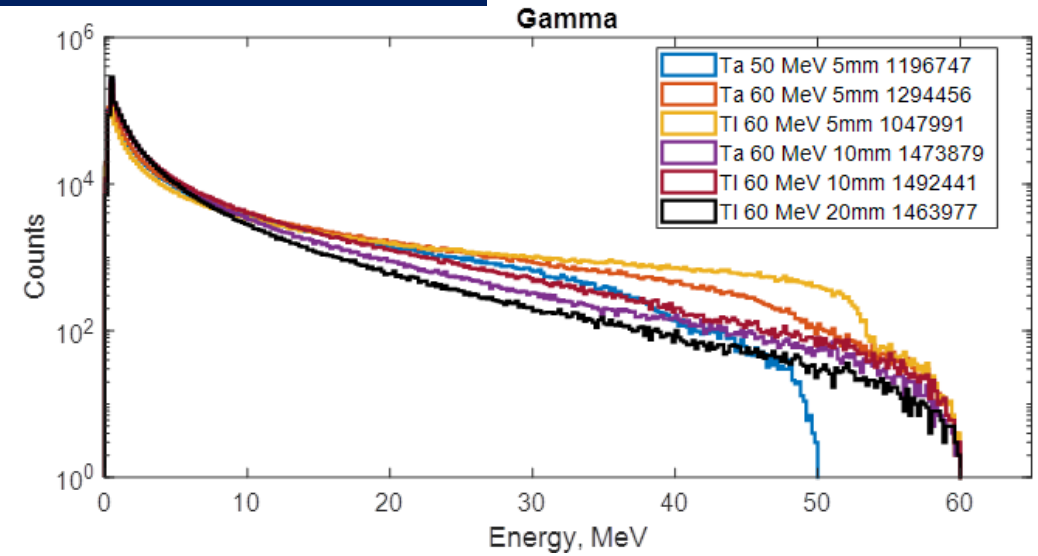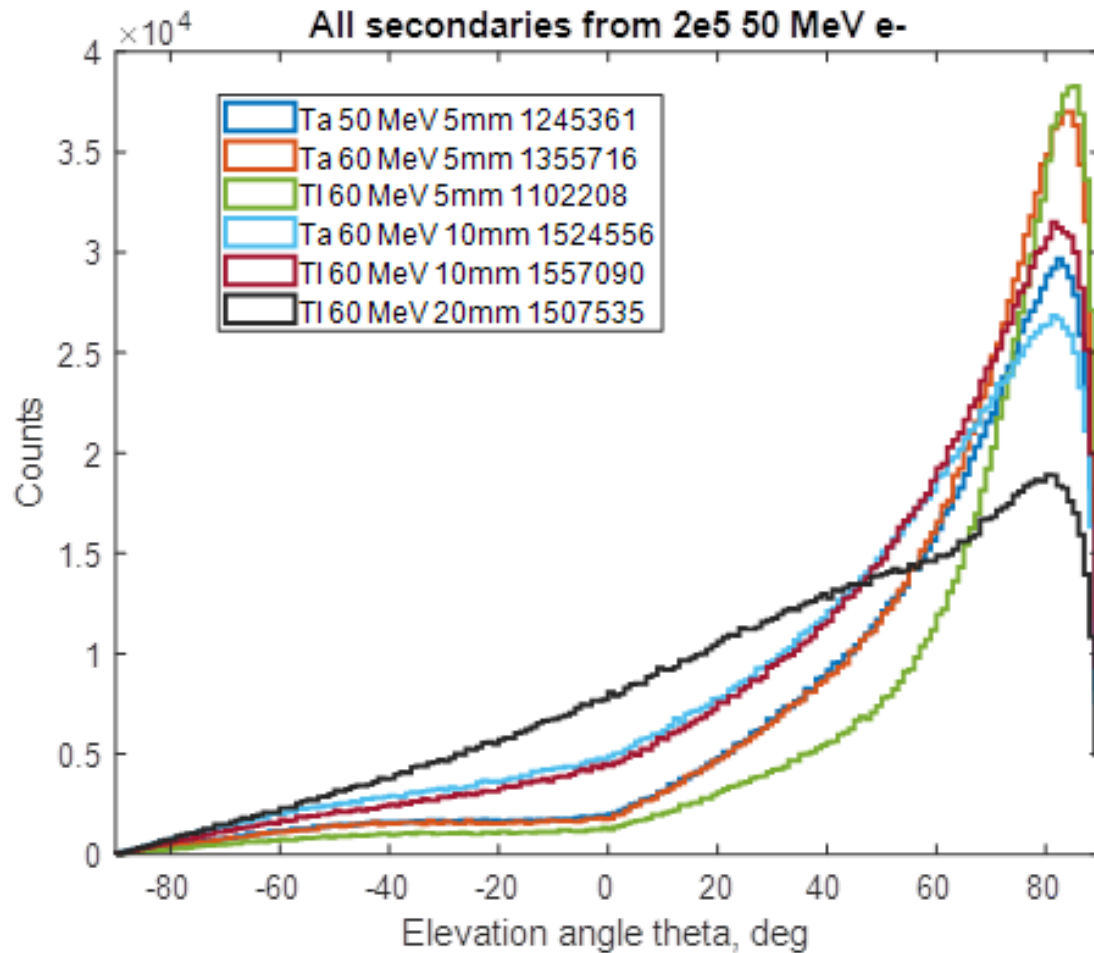


GEANT4 Acknowledgement:
 J. Resta-Lopez, V. Rodin (CI) and LLNL

- 2D PIC EPOCH simulations – CO₂ laser-driven post-processing of ATF beam-driven showers
- Shower properties determined using GEANT4
- Initialize a long shower ~ 2.5 ps
- CO₂ Laser-driven structures – can trap and slow-down positrons

Plasma parameters	1TW	2TW
Density	$2 \times 10^{17} \text{ cm}^{-3}$	
Critical Power (P_c)	1.1 TW	1.1 TW
P/P_c	0.88	1.87
matched- w_0	32 μm	36 μm
a_0	1.52	1.95
λ_β	1.45 mm	1.45 mm
Z_R (matched- w_0)	0.32 mm	0.4 mm
σ_r/w_0	0.9	0.8

**Strongly Mismatched Regime of Nonlinear
Laser-Plasma Acceleration: Optimization of
Laser-to-Energetic Particle Efficiency**
[10.1109/TPS.2019.2914896](https://doi.org/10.1109/TPS.2019.2914896)


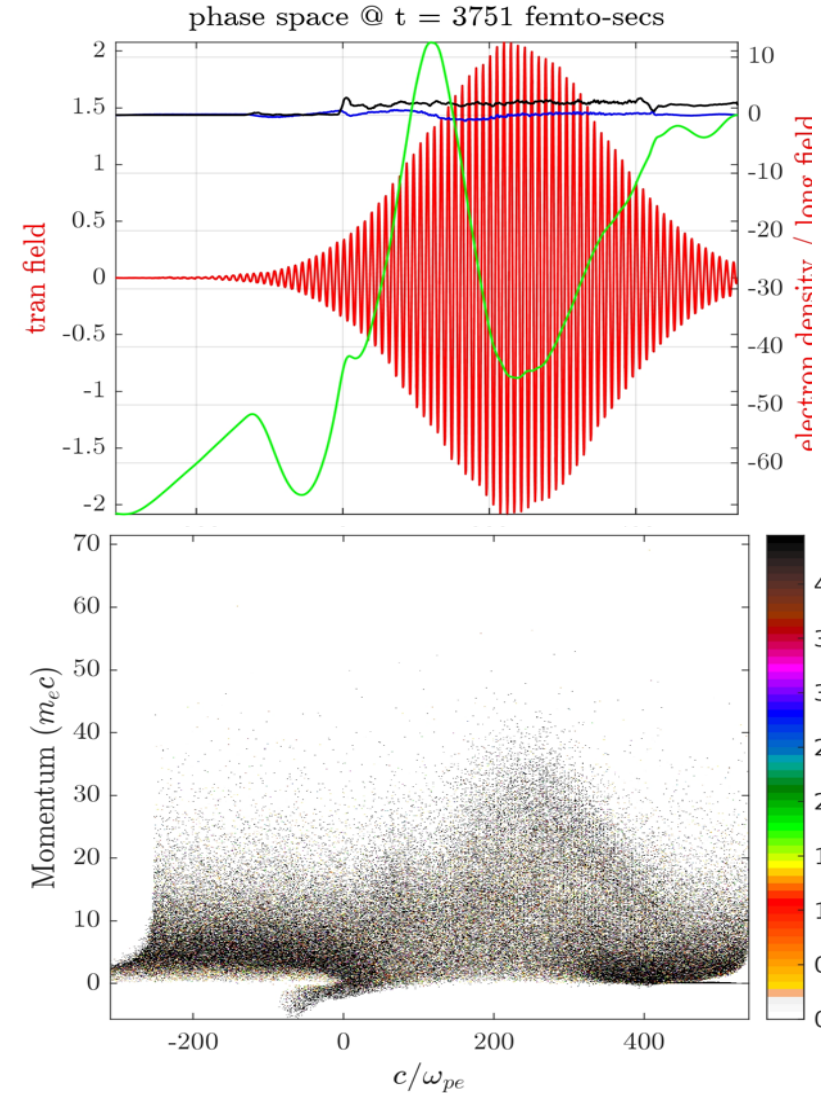


2D PIC simulation of CO₂ laser driven post-processing of shower



experimental layout

- initially use BL# 2
- vacuum chamber on BL#2 – space for our spectrometers
- however, need CO₂ laser on BL#2
- can we get Ti:Sapph or Nd:YAG on BL#2 ?

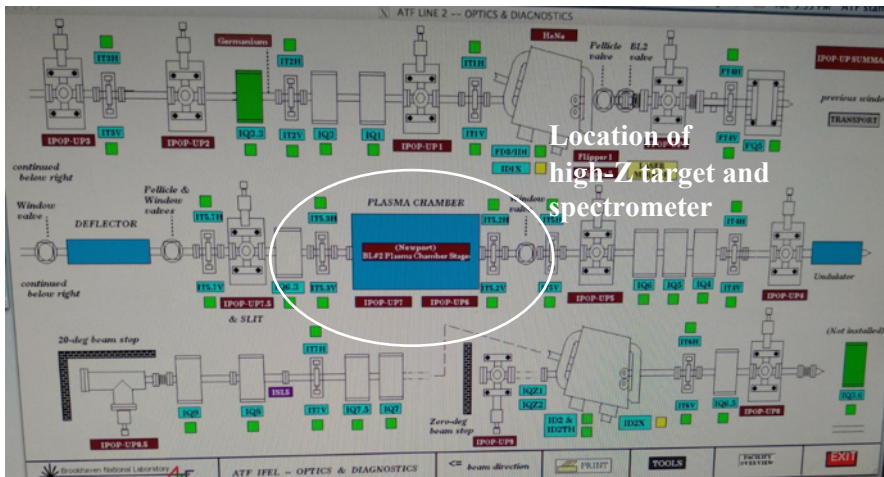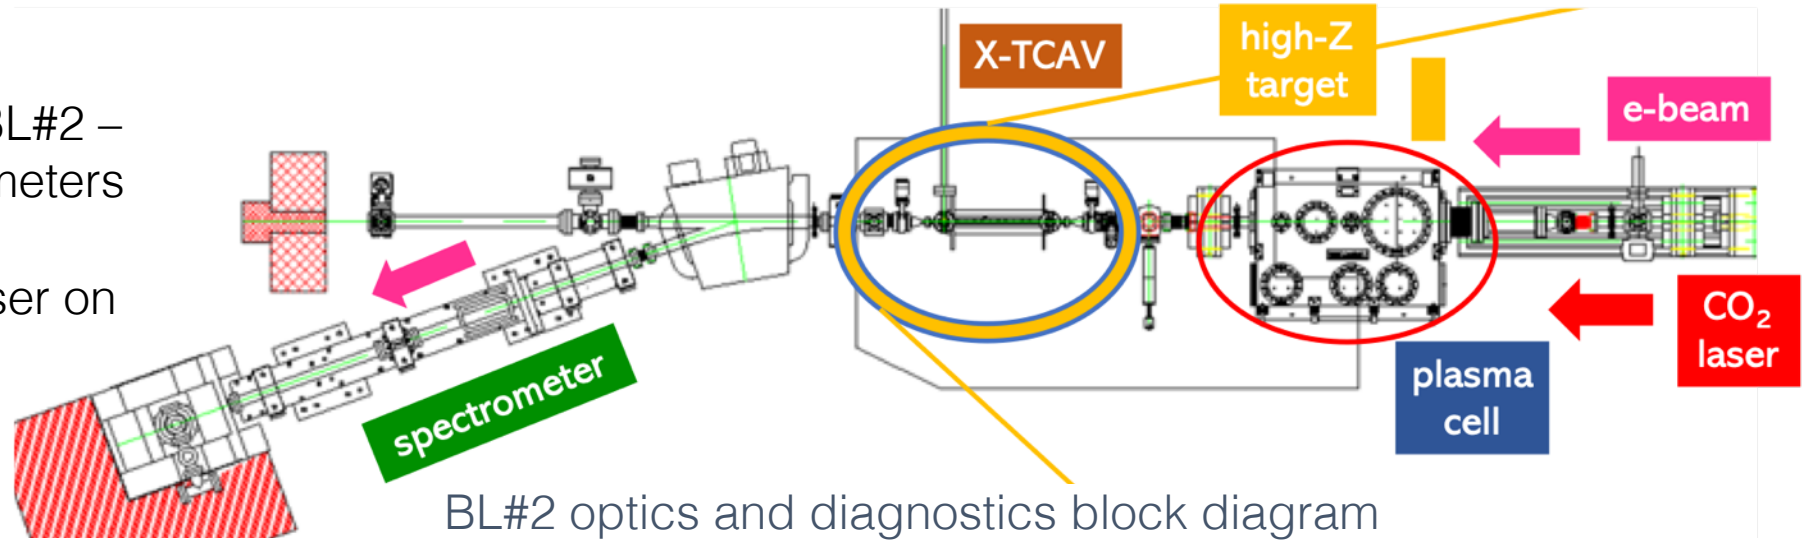

BL#2 optics and diagnostics design to show the location of our experiment



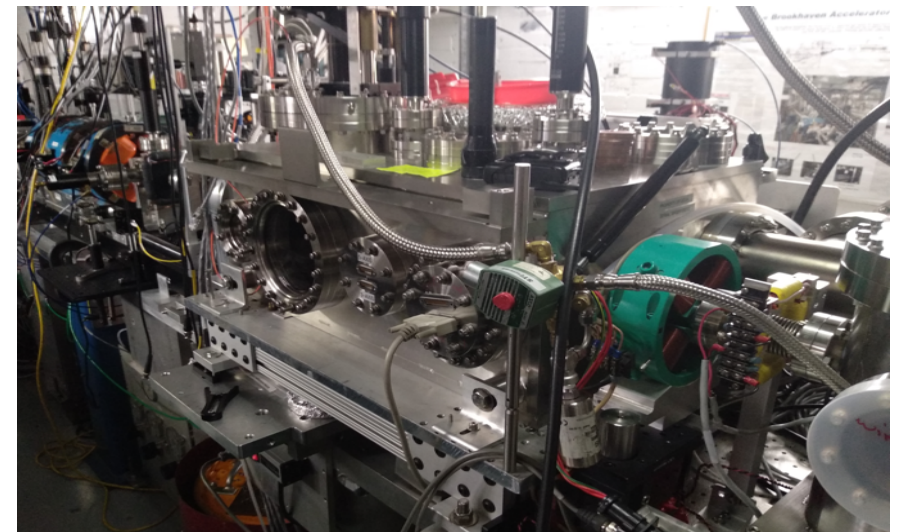


Photo of beamline # 2 setup

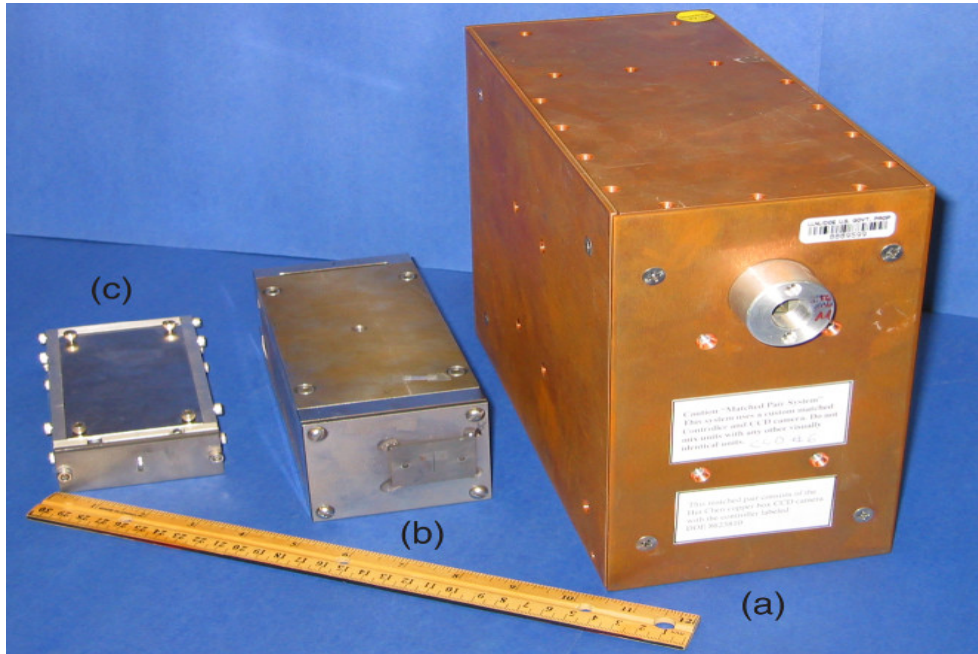

LLNL positron spectrometer

Rev. Sci. Instrum. **79**, 10E533 (2008)

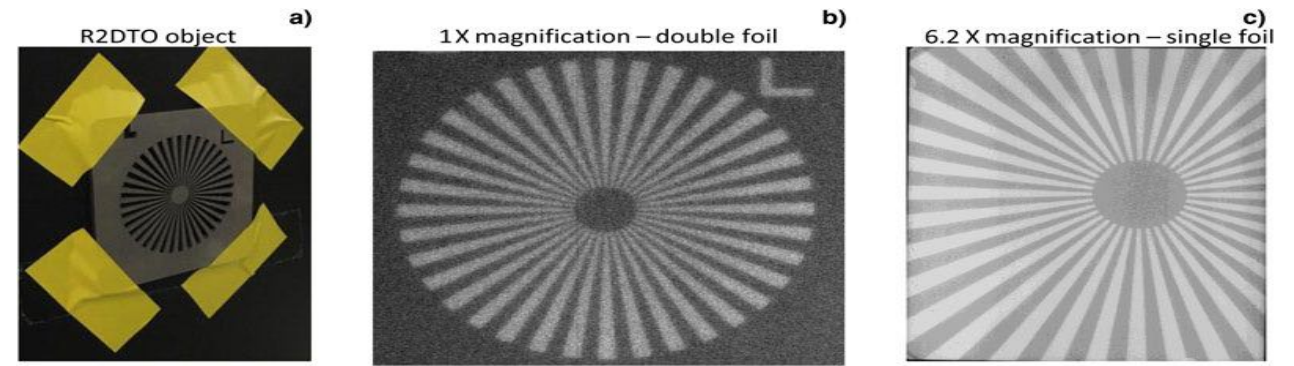

LANL gamma-ray diagnostics

Laser and Particle Beams **36**, 502–506. (2018)

Proposed Milestones

Yr. 1 – characterization of positron-electron jet production in solid target, over the sub-ps electron beam parameter-space (spot-size, charge, current) and its interaction with laser-ionized plasma

Yr. 2 – demonstration of spatio-temporal overlap between a high-power CO₂ laser pulse within the plasma-cell along with positron-electron jets

Yr. 3 – demonstration of tuning of the characteristics of the positron beam by scanning over electron beam, CO₂ laser and plasma properties.

Electron Beam Requirements

Parameter	Units	Typical Values	Comments	Requested Values
Beam Energy	MeV	50-65	<i>Full range is ~15-75 MeV with highest beam quality at nominal values</i>	<i>60 MeV</i>
Bunch Charge	nC	0.1-2.0	<i>Bunch length & emittance vary with charge</i>	<i>1nC</i>
Compression	fs	Down to 100 fs (up to 1 kA peak current)	<i>A magnetic bunch compressor available to compress bunch down to ~100 fs. Beam quality is variable depending on charge and amount of compression required.</i> <i>NOTE: Further compression options are being developed to provide bunch lengths down to the ~10 fs level</i>	<i>0.1 - 1ps</i> <i>(10fs will be highly desirable when available ?)</i>
Transverse size at IP (σ)	μm	30 – 100 (dependent on IP position)	<i>It is possible to achieve transverse sizes below 10 μm with special permanent magnet optics.</i>	<i>30-50 μm</i> <i>Can we get the PMQ triplet setup used earlier at BNL ?</i>
Normalized Emittance	μm	1 (at 0.3 nC)	<i>Variable with bunch charge</i>	
Rep. Rate (Hz)	Hz	1.5	<i>3 Hz also available if needed</i>	
Trains mode	---	Single bunch	<i>Multi-bunch mode available. Trains of 24 or 48 ns spaced bunches.</i>	

Configuration	Parameter	Units	Typical Values	Comments	Requested Values
CO₂ Regenerative Amplifier Beam	Wavelength	μm	9.2	<i>Wavelength determined by mixed isotope gain media</i>	<i>9.2 μm</i>
	Peak Power	GW	~3		<i>3 GW</i>
	Pulse Mode	---	Single		
	Pulse Length	ps	2		<i>2 ps</i>
	Pulse Energy	mJ	6		<i>6 mJ</i>
	M ²	---	~1.5		
	Repetition Rate	Hz	1.5	<i>3 Hz also available if needed</i>	
	Polarization	---	Linear	<i>Circular polarization available at slightly reduced power</i>	
CO₂ CPA Beam	Wavelength	μm	9.2	<i>Wavelength determined by mixed isotope gain media</i>	<i>9.2 μm</i>
	Peak Power	TW	2	<i>~5 TW operation is planned for FY21 (requires further in-vacuum transport upgrade). A 3-year development effort to achieve >10 TW and deliver to users is in progress.</i>	<i>0.5 – 2 TW</i>
	Pulse Mode	---	Single		
	Pulse Length	ps	2		<i>2 ps</i>
	Pulse Energy	J	~5	<i>Maximum pulse energies of >10 J will become available in FY20</i>	<i>1-5 J</i>
	M ²	---	~2		
	Repetition Rate	Hz	0.05		
	Polarization		Linear	<i>Adjustable linear polarization along with circular</i>	<i>linear</i>



- Electron Beam
 - transverse deflecting cavity
 - plasma capillary discharge system

CY2021 Time Request

Capability	Setup Hours	Running Hours
Electron Beam Only	<i>24</i>	<i>120</i>
Laser* Only (in Laser Rooms)		
Laser(s)* + Electron Beam		

Time Estimate for Remaining Years of Experiment (including CY2021)

Capability	Setup Hours	Running Hours
Electron Beam Only	Good for year 1 (but pre-amp CO2 level would be very useful)	
Laser* Only (in FEL Room)		
Laser(s)* + Electron Beam	<i>80</i>	<i>320</i>

* Laser = Near-IR or LWIR (CO₂) Laser