





A possible method for adding services load to the EIC simulations



- Services (power, signal, configuration, cooling, etc.) are expected to be a dominant part of the material in the large acceptance of the EIC central detector region.
- Unlike the support pieces, which need to change according to the detector configuration and would be difficult to parametrize, the services load can be scaled with reasonable accuracy to the silicon surface area.
- The parameters of this then method can then be adjusted to different sensor technologies showing performance differences from the services load standpoint.
- The physical volumes required at the end of staves/discs can also be added to the simulation models to allow for more realistic geometries.



Example: Services for existing technology (ALPIDE sensor) in ALICE ITS upgrade services for outer half-barrel layers

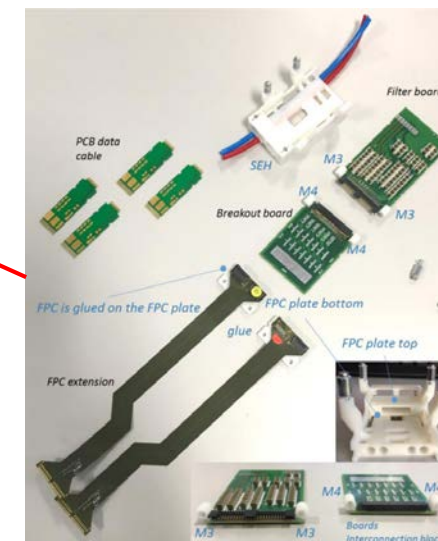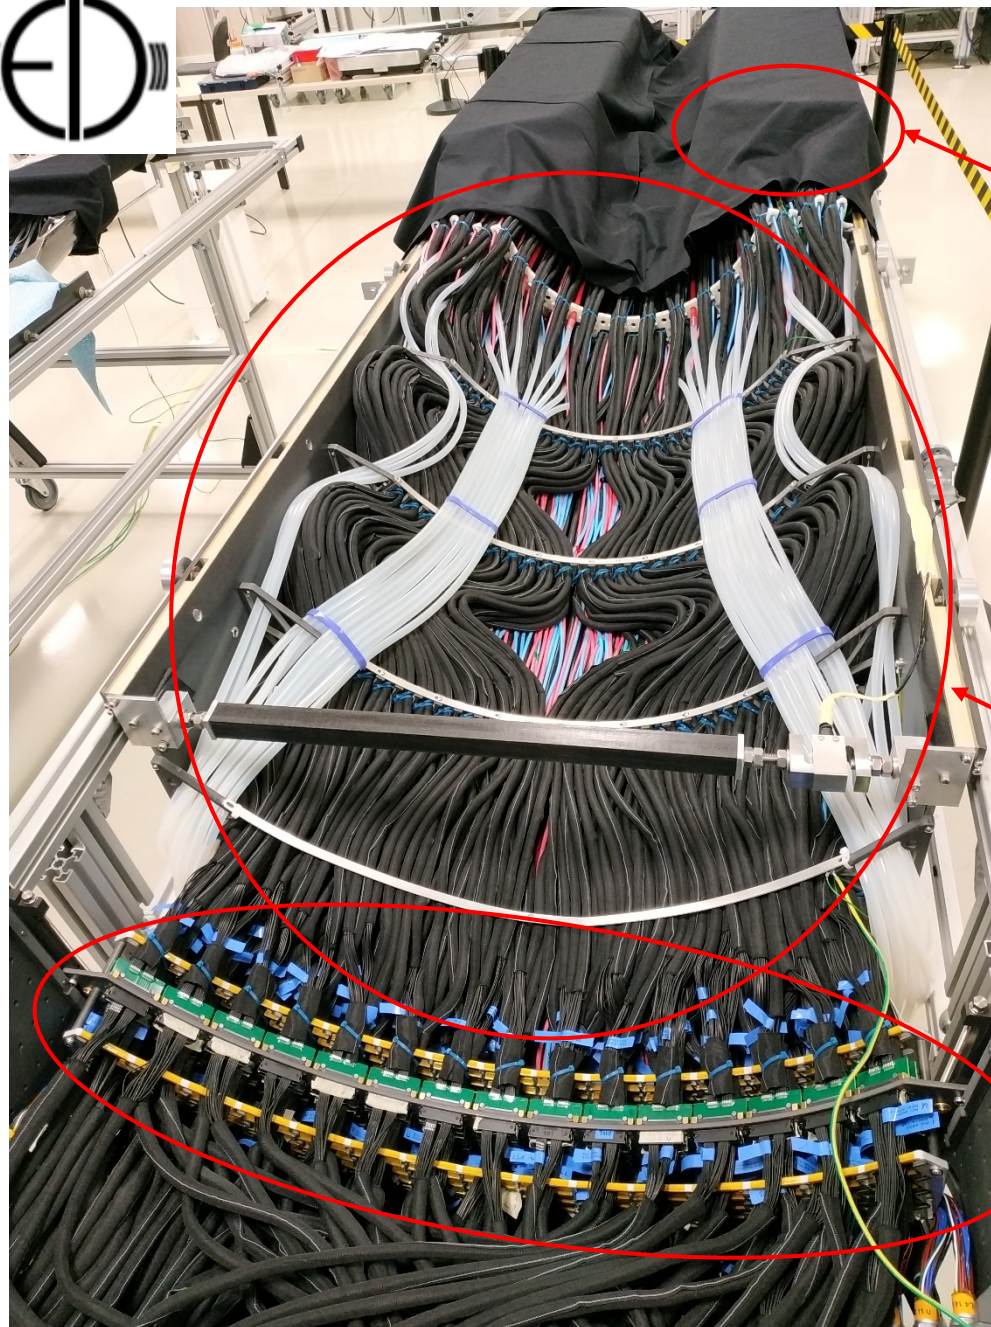

Material at end of each stave

Power, signal, cooling


Patch panel
(usually required for all detectors)



Approach to separate pieces of parameterized services



Lawrence Berkeley National Laboratory

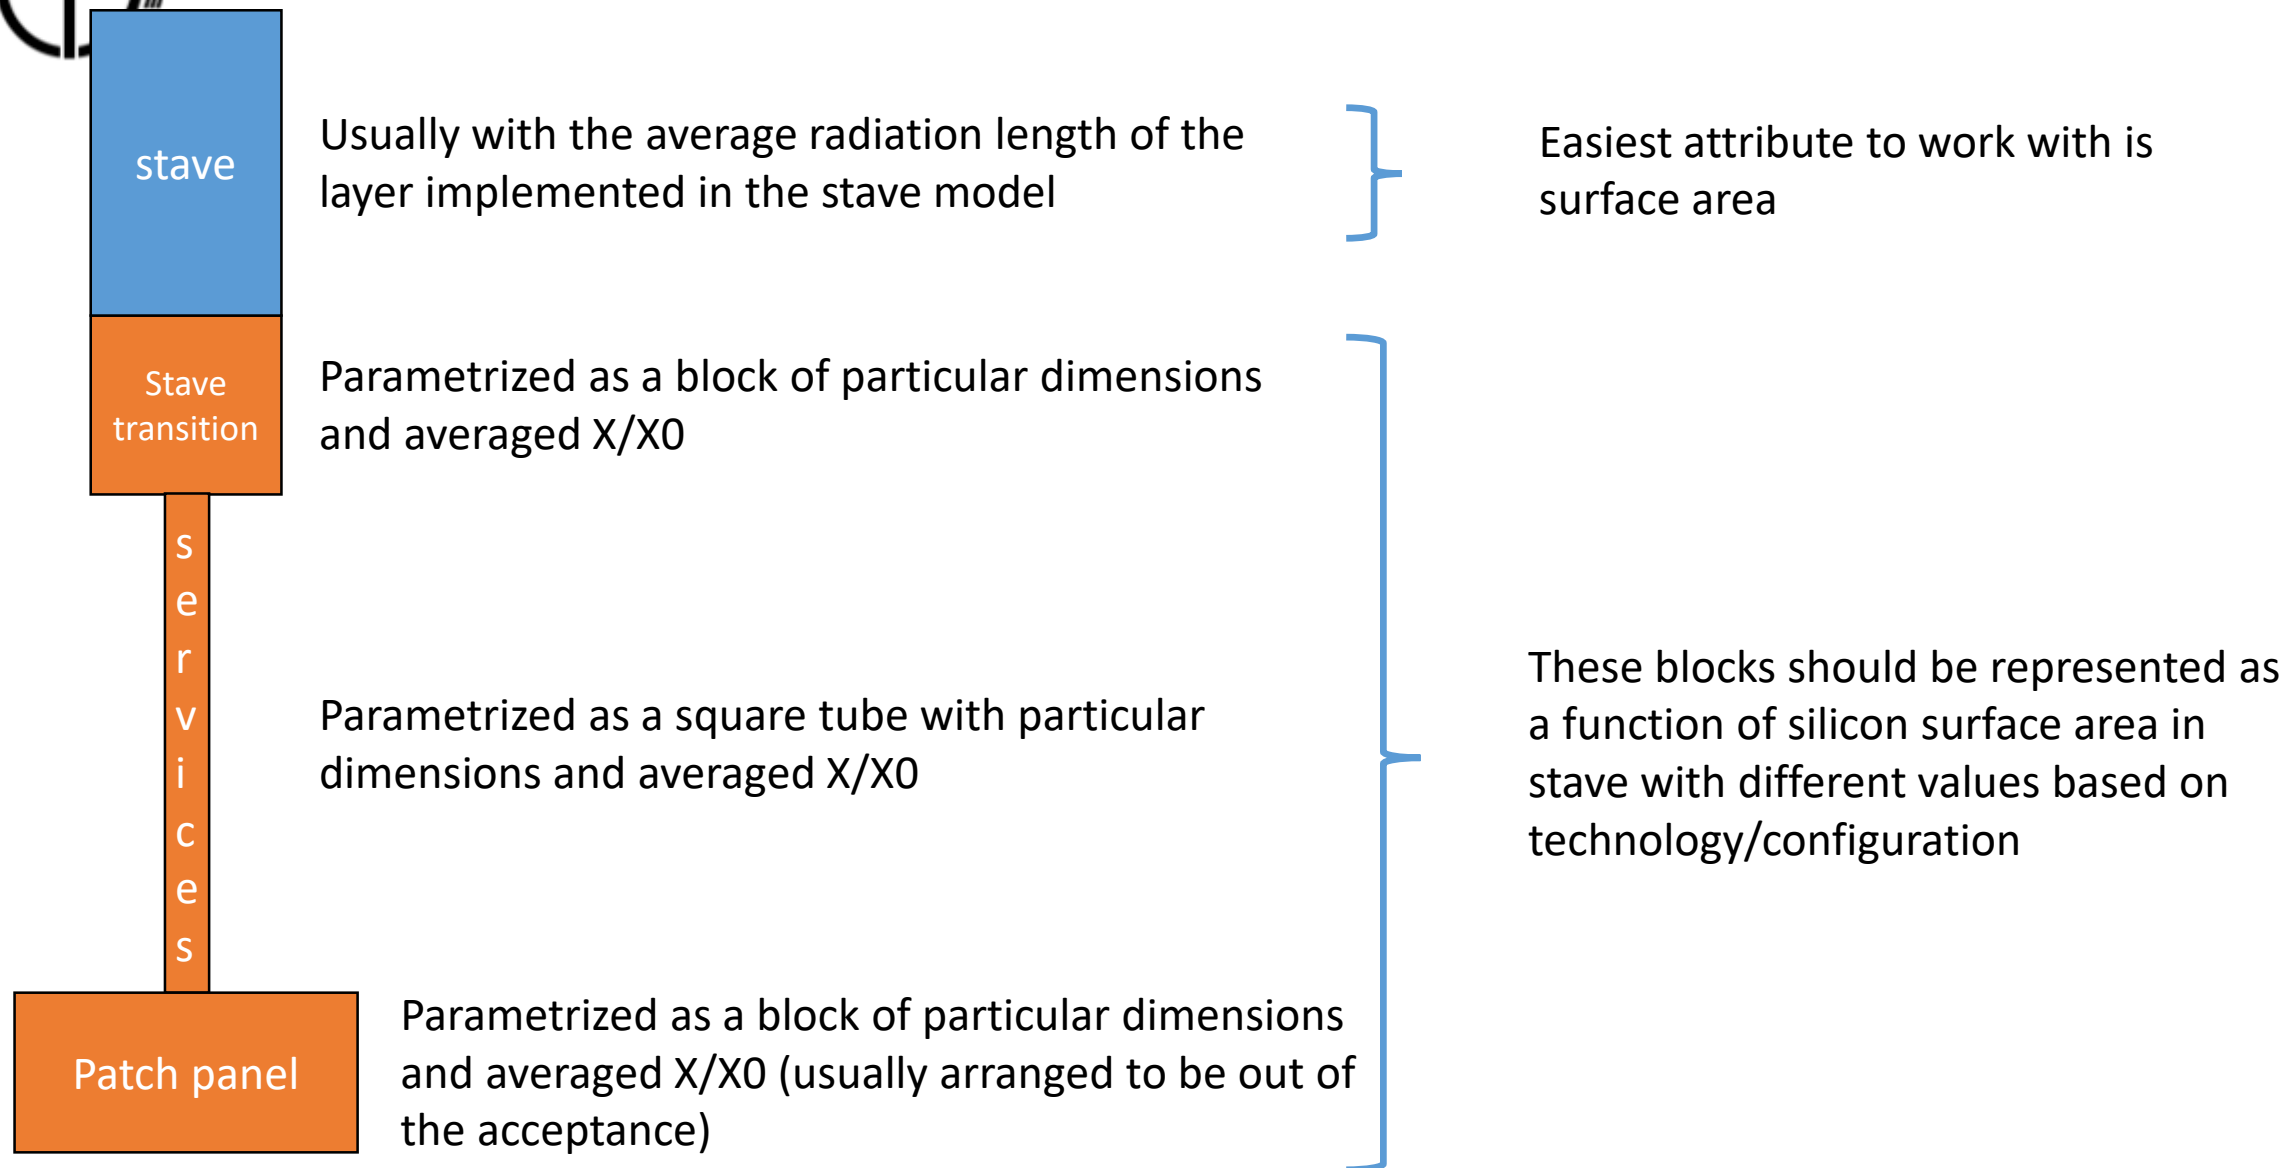



Approach to separate pieces of parameterized services

Method –

- Sum the material composition and homogenize to average X/X_0 for given mechanical cross section.
- Check that the specified sizes make mechanical sense and scale appropriately. This allows for reasonable mechanical integration in simulation.

Example:

ITS ALPIDE staves (layers 3-6)

Stave
transition

Parametrized as a block of particular dimensions
and averaged X/X_0

Excel Spreadsheet

| material associated with each module for ML, OL | cross section (cm ²) | material | length (cm) | material radiation length (g*cm ⁻²) | density (g/cm ³) | comment | total material (cm ³) | | services/module material total (cm ³) |
|---|----------------------------------|-------------------|-------------|---|------------------------------|---|-----------------------------------|-------------------|---|
| | | | | | | | | | |
| power filter board PCB | 0.42 | FR4 | 10 | 30.17 | 1.8 | | 4.2 | FR4 | 4.2 |
| copper | 0.12 | Cu | 10 | | | | 0.12 | Cu | 0.42 |
| capacitors | 0.08 | chip ceramic caps | 15.75 | 11.16 | 6.02 | 2.5 x 2.5 x 3.2 mm each x 63 capacitors | 1.26 | Chip ceramic caps | 1.26 |
| stave extension pieces | | | | | | kapton + Cu + connector | | kapton | 3 |
| kapton | 0.1 | kapton | 30 | 40.58 | 1.42 | | 3 | PEEK | 10 |
| Cu | 0.01 | Cu | 30 | 12.86 | 8.96 | | 0.3 | polyethylene | 44 |
| Stave Extension Holders | 1 | PEEK | 10 | 39.6 | 1.32 | PEEK | 10 | water | 56 |

- Combine to get averaged radiation length
- Combine with known physical size and scale radiation length to new volume



Approach to separate pieces of parameterized services



Lawrence Berkeley National Laboratory

If we use ALPIDE (existing technology) we can estimate services as below

Average of 0.7-0.8 % X/X_0 in simulation

stave

Stave
transition

Area of (63 cm^2) of sensor requires 3 cm^3 material with an X/X_0 of 0.0383 per traversed cm.

s
e
r
v
i
c
e
s

Area of (63 cm^2) of sensor requires a cross section of 1 cm^2 with a X/X_0 of 0.007861 per traversed cm of length.

Patch panel

Area of (63 cm^2) of sensor requires a block of $2 \text{ cm} \times 1 \text{ cm} \times 1 \text{ cm}$ with 0.03423 X/X_0 per traversed cm.

This should also work for discs



Some Comments




- The starting point of this exercise is an ALPIDE like sensor as this is what is often used in the simulations.
- This approach allows us to integrate the radiation length and the services volume as a function of silicon area and to add then to the simulation.
- In the ITS upgrade, we did not make heroic measures to minimize the services mass as it was mostly out of the tracking acceptance. This will be less true for the EIC.
- This method may be used as a starting point to assess the effect on the physics of using an ALICE ITS services load.
- If this is found to unacceptably affect the physics (I suspect it will) we can then attempt to ameliorate this by:
 - moving to an ITS3 type sensor that has inherently lower service requirements
 - targeted R&D to minimize services
 - ideally we do both.
- This estimate is also valid for discs. I will work on parameterizations for the inner vertex layers and an estimate for what can be expected for an ITS3 type sensor.



A possible software implementation (by Alexander)



Lawrence Berkeley National Laboratory

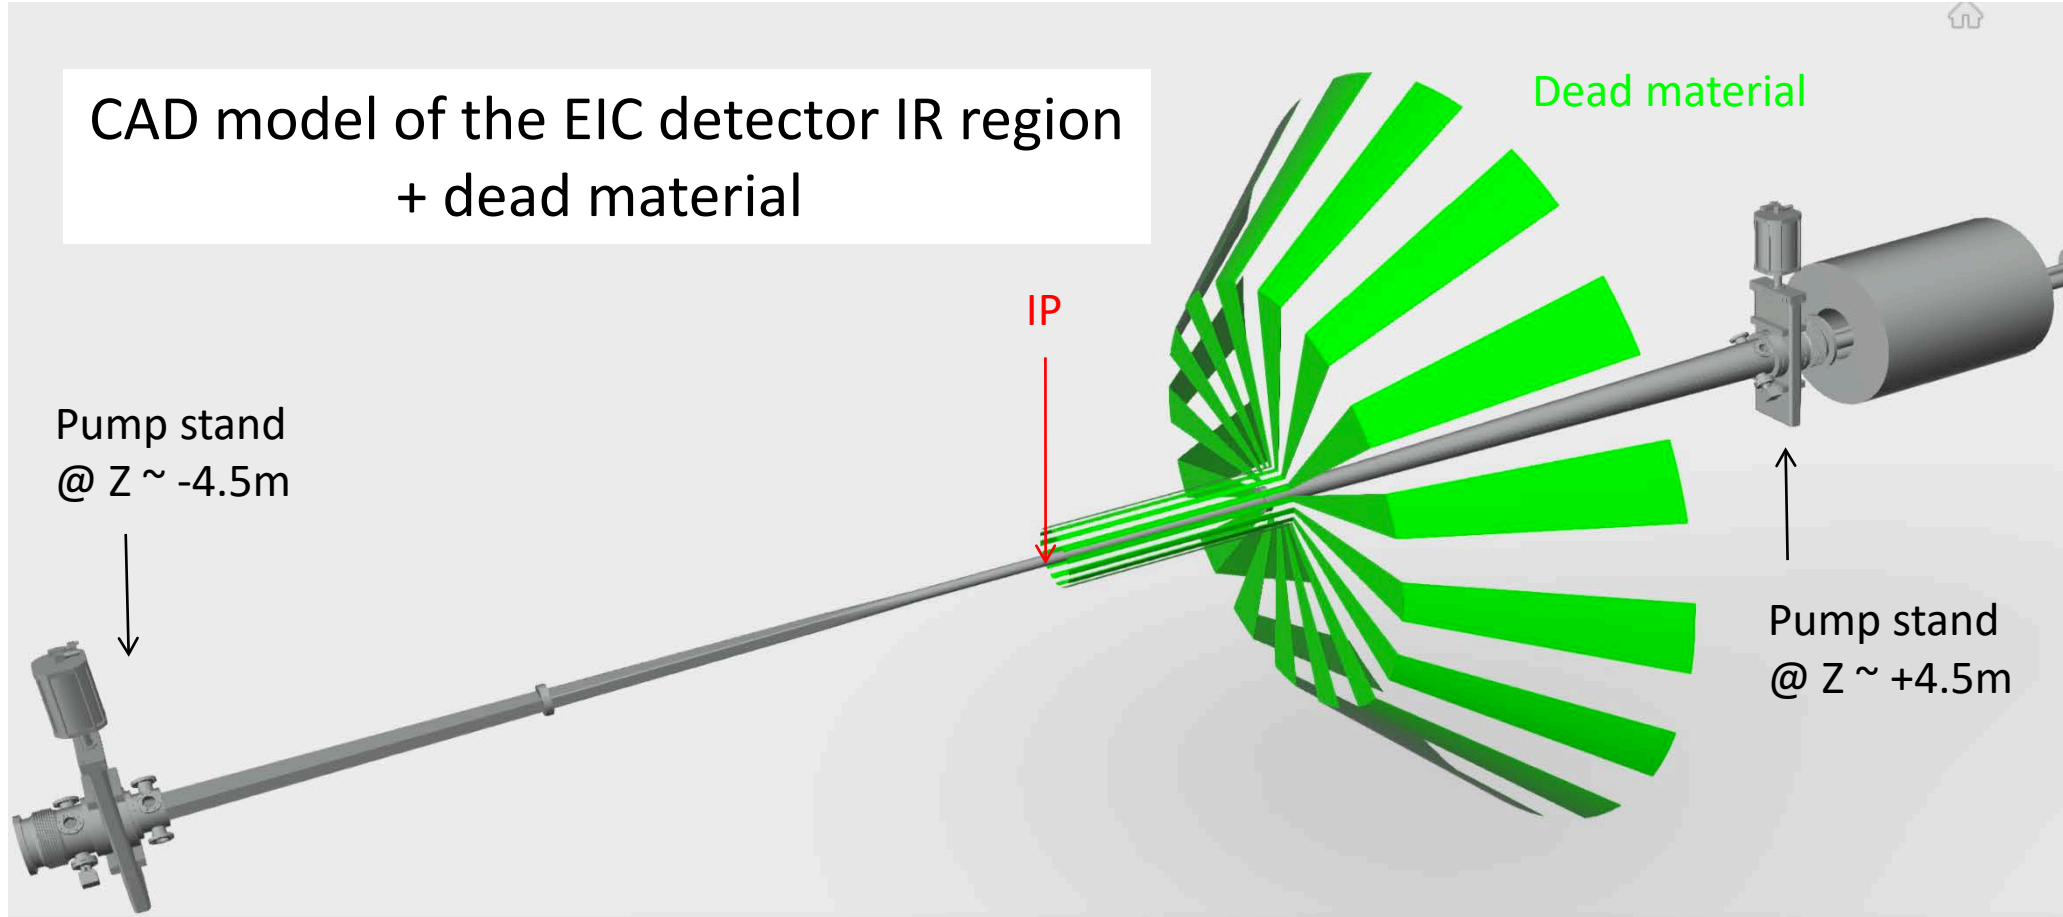


- Describe the dead material distribution according to the proposed scheme
- Describe the way you "route the material away"
- Export as a STEP file -> can overlay with the IR/detector engineering drawings



A possible software implementation (by Alexander)



Lawrence Berkeley National Laboratory

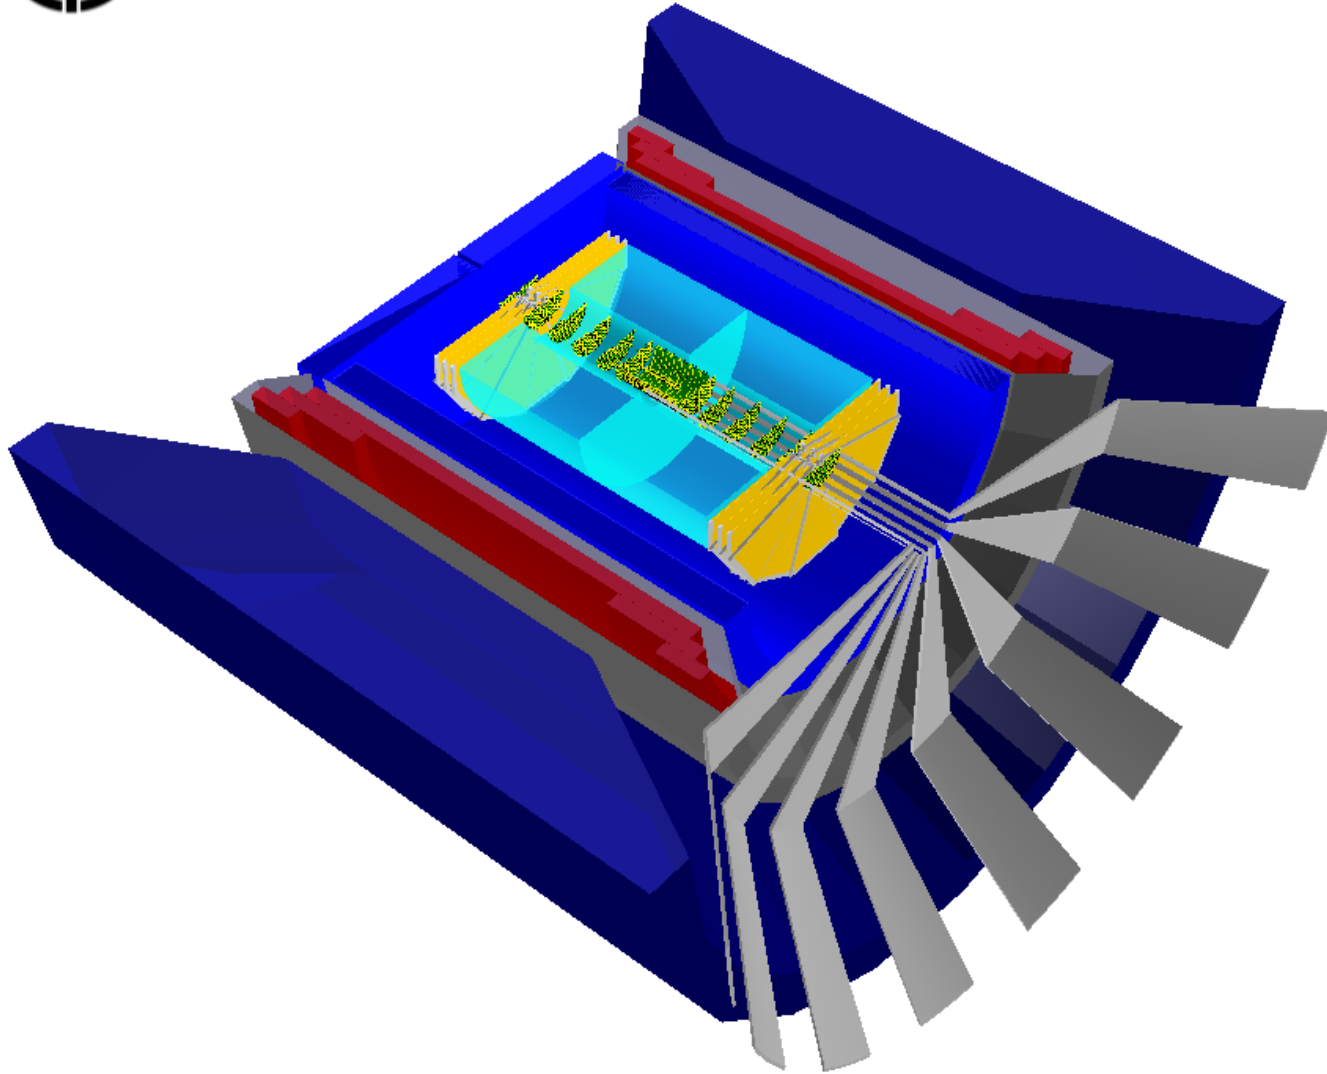

- Convert CAD file to something GEANT can import (boolean decomposition of the STEP file elements in TGeo shapes in this case; other options possible)
- Assign material tag
- Import in GEANT and overlay the resulting solid object with the particular detector model

BeAST detector + the same dead material in GEANT